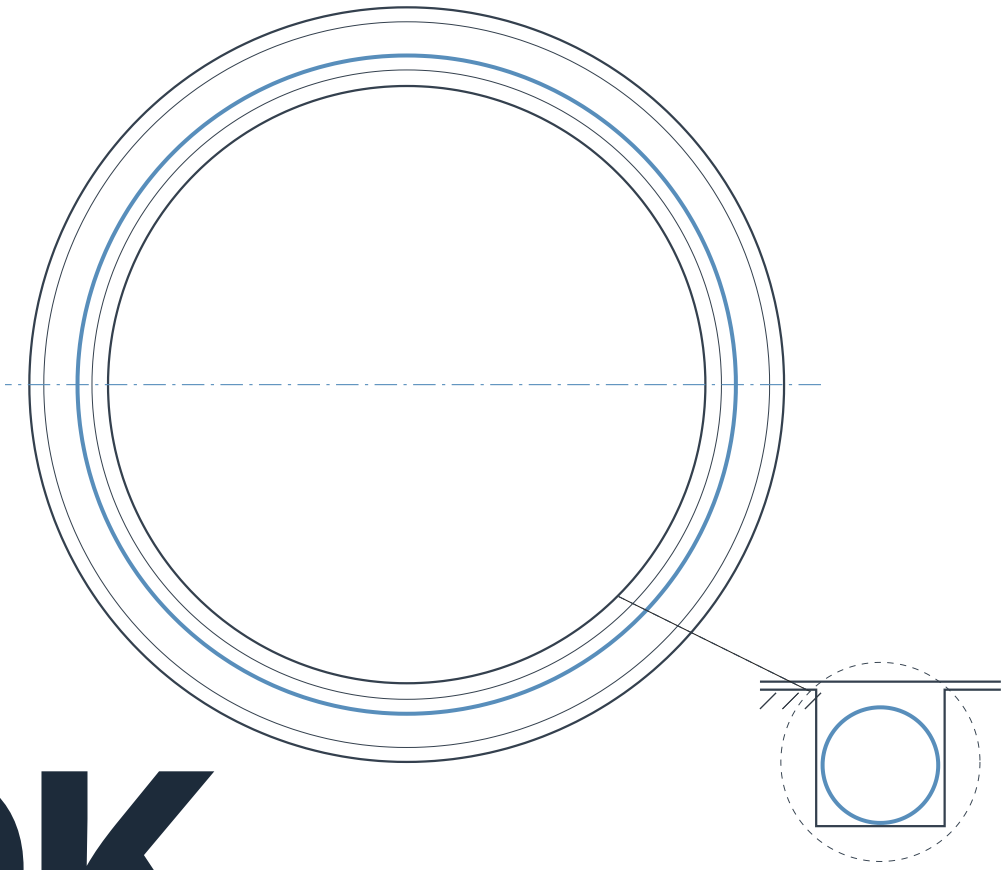


NOK

O-Rings

کاتالوگ جامع اورینگ NOK

استعلام قیمت و خرید اورینگ NOK ←

BRAND برند	ORIGIN کشور سازنده	PRODUCTS محصولات	PAGES تعداد صفحات	LANGUAGE زبان
NOK	Japan	O-rings	103	English

moharekcharkhesh.com
MoharekCharkhesh@proton.me

تأمین‌کننده تخصصی بلبرینگ و رولبرینگ
تهران، خیابان امیرکبیر، کوچه ناظم‌الاطبا شمالی، پاساژ تهران، طبقه سوم، پلاک ۱۴۲

021 3399 8121
021 3399 8100
0912 464 6470

Cat.No.051E・07-2025

O-RINGS

NOK CORPORATION

Globally Recognized World Class Quality

NOK Precision Precision Moldings & O-Rings Division acts as the base for our company's O-ring manufacturing operations, and by passing the strictest international quality assurance standard audits, it has helped us to earn recognition as an ISO 9001 compliant supplier.
Based on this "testament" to our excellence, we intend on taking steps toward achieving continuous quality improvements so that we can further solidify our reputation as a reliable and trustworthy supplier.

NOK Precision Molding & O-Rings Division: ISO 9001 certified (in October, 1998)



[**NOK Precision Molding & O-Rings Division**] 2089 Nagakusa, Aso City, Kumamoto Prefecture, JAPAN

NOK does not guarantee the accuracy of any data provided by third parties.

O-RINGS

【Table of Contents】

Page

1. Introduction — 2
2. Selecting O-Rings — 6
3. O-Ring Sealing Mechanisms — 6
4. Types of O-Rings — 7
5. Temperature Ranges and Sealing Medium of Standard Materials — 8
6. Standard Values and Actual Values for O-Ring Standard Materials — 10
7. O-Ring Design Standards — 14
8. O-Ring Usage Methods (Types of Grooves) and Precautions — 16
9. Chamfering Design for Holes and Shafts — 18
10. Precautions for Special Applications — 18
11. Precautions for O-Ring Installation — 19
12. Precautions for Storage, and Shelf Life — 19
13. JIS Dimension Identification Codes — 20
14. Le-μ's: Low Friction(μ) Seals — 20
15. Dimension Tables for NOK Standard O-Rings — 21
    - JIS P Series — 22
    - JIS G Series — 30
    - NOK S Series — 34
    - NOK SS Series — 36
    - JIS V Series — 37
    - AS568 (old ARP568) Series — 38
    - Old JASO Series — 46
    - ISO Equivalent General Industrial Series — 54
    - NOK WEX Series (O-Ring series for water applications) — 58
    - NOK BE Series (O-Ring series Biomass) — 59
    - NOK Iron Rubber P, G Series — 60
    - JIS Equivalent Backup Rings — 62
    - NOK SP Coating O-Ring Series — 66
    - NOK RX Series (O-Ring series for refrigerant) — 67
16. Chemical/Solvent-Resistant Material "FP64" — 68
17. Hydrogen-Resistant Materials "Special VMQ" & "E9079" — 69
18. O-Ring Surface Treatment Technology — 70
19. Joint O-Rings — 70
20. Klüber Lubricants for Sealing — 71
21. Reference Materials -Actual Data, Blooming, Swelling, Failure Mode Case Studies, Etc.- — 72
22. O-Ring Groove Dimensions for Standards with No Groove Indications — 79
23. O-Ring Dimension Quick Chart — 87

NOK Product Lineup — 96

Appendix (Typical Tolerances and Dimensions/SI Unit Conversion Table) — 98

Le-μ's


High-performance brand that contributes to the environment through low-friction technologies

1. Introduction

(1) Creating sealing function to keep Fluids or Pressure away

O-rings are the most typical sealing products generating compressive stress to have sealing function.
Although synthetic rubber is widely used material to produce O-rings recently, when they were first introduced around the mid-19th century for sealing cylinders in steam engines, it is said that cast iron was used to produce such products. In later years, natural rubber with elastic properties would have been used to form such products, and after entering the 1940s, usage of synthetic rubber that we make use of today became the norm, thereby making it possible to seal a wide variety of fluids, such as air, water, gas, and oil.
As a notable example, such products were used in the hydraulic systems of aircraft during World War II, and the high reliability of these sealing products sparked their rapid adoption for use in applications involving general pneumatic and hydraulic equipment, and such use continues until today. While it goes without saying that proper usage and design are required in order to maintain high reliability, material selection and quality also play a critical role.
We, NOK, have established the Shonan R&D Center in order to further enhance our material technology capabilities that we have developed throughout our long and storied history. In the center, we can now engage in fundamental technological research that goes far beyond our past capabilities, and it has enabled us to establish a material development system that can meet the demands of our customers for an even wider range of applications and requirements.
Furthermore, at NOK, we engage in efforts from a global standpoint as we continue to expand our overseas presence. As part of such efforts, we have designated our Kumamoto Plant as our hub for O-ring production and as a “Model Factory,” which enables us to create even better on-site production environments that allow us to strive for even further improvements in quality and consistency.
At NOK, our O-rings have already helped us to earn the trust of customers in a wide array of industrial sectors across the world, and through our constantly evolving material development technologies and our consistent production of reliable, high-quality O-rings, we hope to continue to meet the ever-changing and increasingly sophisticated requests of our customers.

[Types of Sealing Equipment]

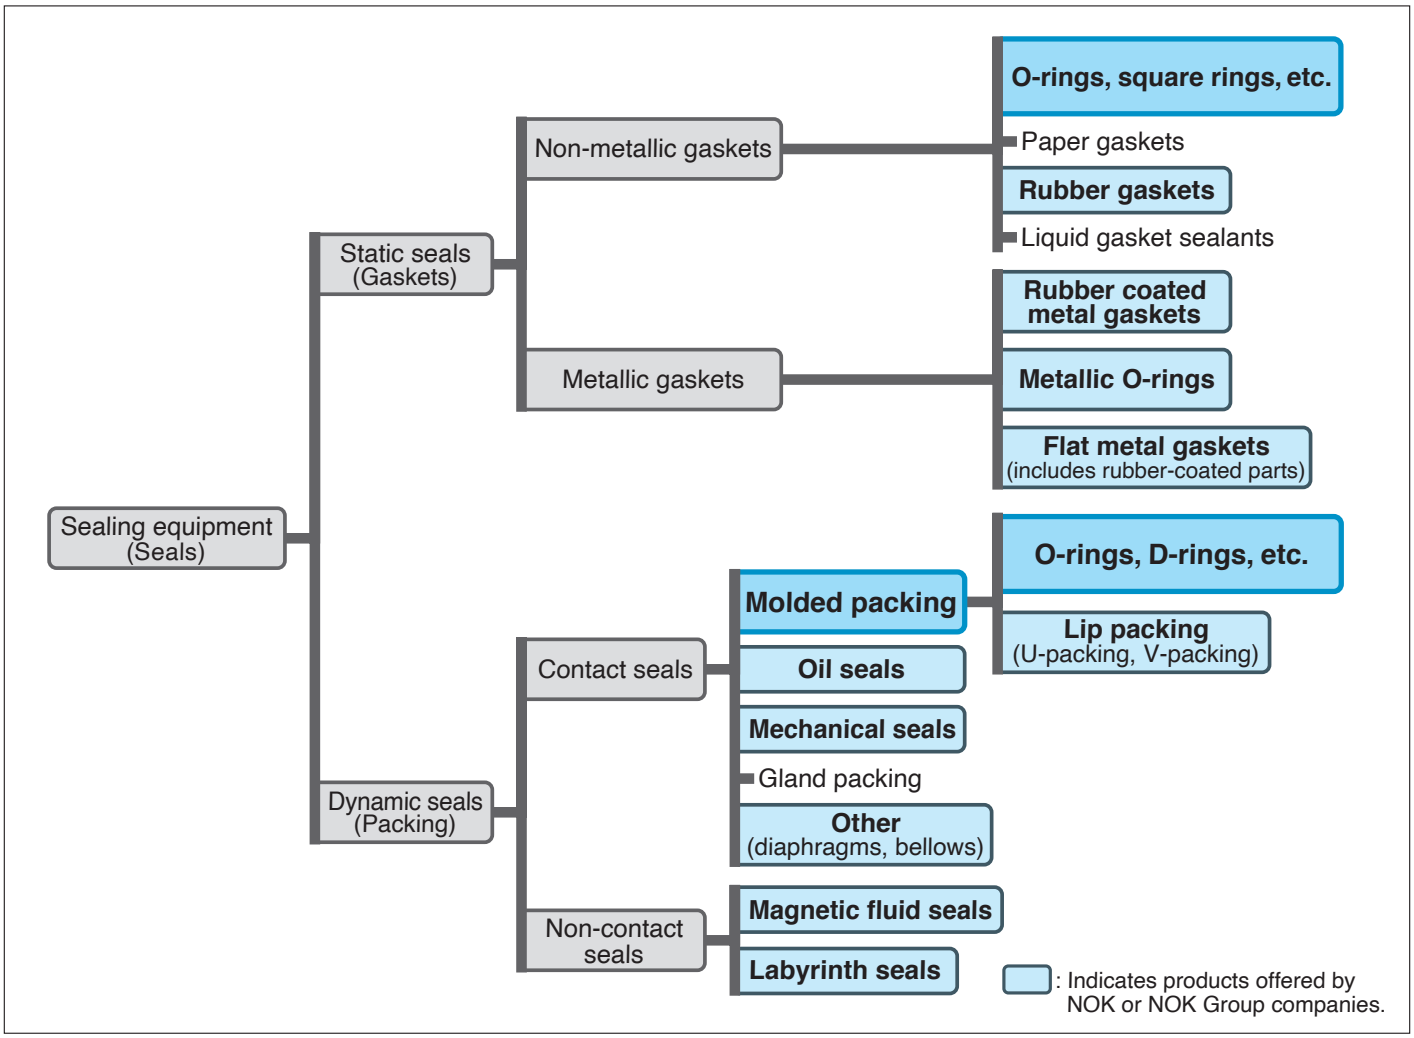

(2) Features of NOK O-Rings

a.) Vast range of materials offered (approx. 200 types)

We offer a vast range of materials that can meet your requests for a wide variety of applications.
Just provide us with your usage conditions, and NOK is going to select the ideal material for you.

b.) Original materials based on NOK's proprietary compounding technologies and design

We use our own proprietary design to develop materials that satisfy JIS specifications.
Utilizing material engineering technologies to fully take advantage of the characteristics of polymers and chemicals, we strive to develop materials that can meet the needs of our valued customers.

c.) Fully-integrated quality control system (every process from the compounding/mixing stage is carried out at NOK)

NOK processes begin with receiving chemicals, polymers, and carbon materials.
NOK quality control processes also begin at this stage as we strictly manage the quality of such raw materials.
NOK production processes are carried out under our fully-integrated quality control system from raw material to finished product.

d.) Extensive testing and analysis capabilities based on our sophisticated testing facilities

In addition to material testing for standard physical properties, compression set, and oil immersion testing, our system enables us to conduct extensive in-house analysis of sealing performance.
Just provide us with your required usage conditions and testing conditions so that we can leverage our abundant wealth of experience and a wide array of testing facilities to better support you in your product development efforts.

e.) Globally Recognized World Class Quality

Our products have a proven track record that has been established over the years through use in the automotive, construction machine, agricultural machine, and general machinery industries, and by supplying such products, we contribute to the further development of industries and the continued evolution of manufacturing activities throughout the world.

(3) NOK O-Ring Production Process Flow

*Excludes O-rings made from Iron Rubber (polyurethane elastomer)

Inspections are conducted at each individual process, and only those parts that pass inspections are allowed to proceed to the next process.
Lot numbers are used to ensure traceability for each individual process from the receiving of chemicals to product shipment.

1 Compounding/mixing process


Polymers, carbon materials, and chemicals are mixed together to create a rubber compound.



Unloading of raw materials　Measuring　Mixing

2 Extruding/blanking process


The rubber compound is formed to make it ready to use at the production line.

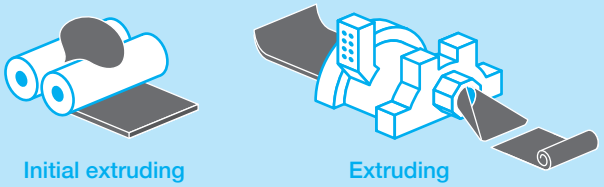

Initial extruding　Extruding


3 Curing process (molding process)

The rubber compound is placed in a mold, and heat and pressure are applied to it as it is cured for a specified period of time.

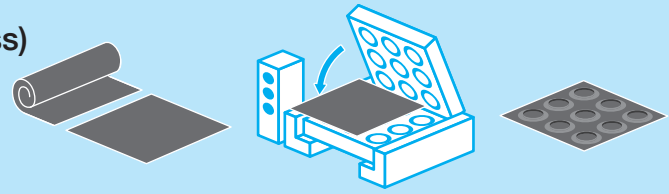


4 Deflashing process

Burrs (segments of excess rubber that are not used) are removed from the product.

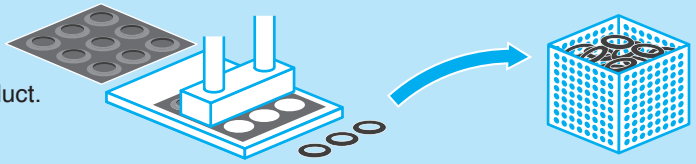


5 Post curing process

Depending on the material used, post curing is performed to stabilize its physical properties.

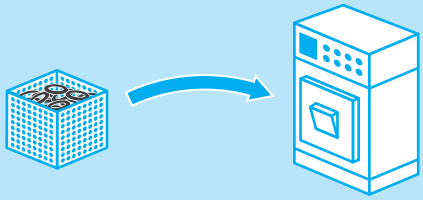

6 Final inspections/shipment

Final inspections are conducted and the product is shipped.



(4) O-Ring Design Related Terminology

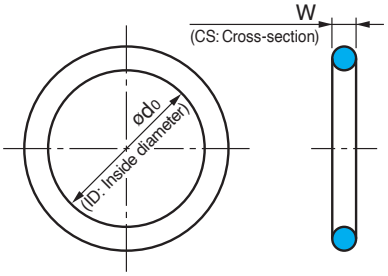


Fig. 1-1 O-Ring

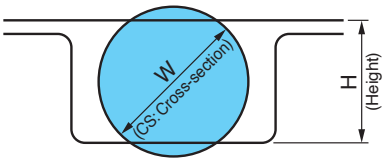
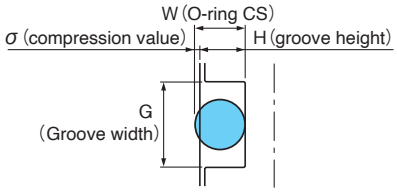

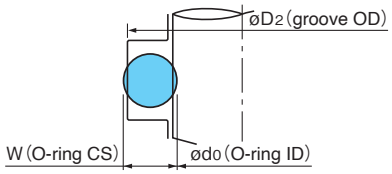
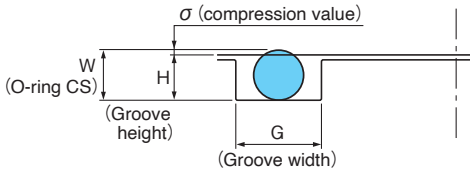


Fig. 1-2 How O-Rings Are Used

(1) O-Rings for Cylindrical Surfaces

Term	Calculation formula	Schematic
Compression value (mm)	$\sigma = W - H$	
Compression ratio (%)	$\frac{\sigma}{W} \times 100$	
Filling ratio (%)	$\frac{\pi/4 \times W^2}{G \times H} \times 100$	
Piston seal for cylindrical surfaces Inside diameter (ID) elongation ratio (%)	$\frac{D_1 - d_0}{d_0} \times 100$	
Rod seal for cylindrical surfaces Outside diameter (OD) interference ratio (%)	$\frac{d_0 + 2W - D_2}{d_0 + 2W} \times 100$	

(2) O-Rings for Flat Faces

Term	Calculation formula	Schematic
Compression value (mm)	$\sigma = W - H$	
Compression ratio (%)	$\frac{\sigma}{W} \times 100$	
Filling ratio (%)	$\frac{\pi/4 \times W^2}{G \times H} \times 100$	

2. Selecting O-Rings

An O-ring is a ring-shaped packing that has a round cross-section, and they are typically used by seating them in a groove and applying an adequate degree of compressive stress in order to seal a wide variety of fluids, such as oil, water, air, or gas.
Products can be designed for static or dynamic sealing, and unless an appropriate product is selected to match the usage conditions, this could result in such conditions as tearing, swelling, or compression cracking due to pressure. In order to ensure consistent sealing performance over long periods of time, it is necessary to select products with materials and dimensions that are suitable for the usage conditions.

When selecting a product, it is necessary to take into consideration the factors given in Table 1-1.

Table 1-1


Factor	Page	Purpose
a. Usage temperature	8	For material selection
b. Medium being sealed	9	
c. Degree of pressure	15	For selecting material hardness; determining if backup ring is necessary.
d. Usage method (static or dynamic)	22~61, 66,67	Dynamic: JIS P Series, Old JASO Series, WEX Series, BE Series, NOK Iron Rubber P/G Series Static: JIS P/G/V Series, NOK S/SS Series, AS568 Series, Old JASO Series, ISO Equivalent Series, WEX Series, BE Series, NOK Iron Rubber P/G Series, SP Coating O-Ring Series, RX Series

Please consult with NOK if the factors shown to the left do not suffice.


3. O-Ring Sealing Mechanisms

(1) O-Ring Sealing Mechanisms

O-rings provide a sealing mechanism when the compressed O-ring exerts a reaction force to form a seal.

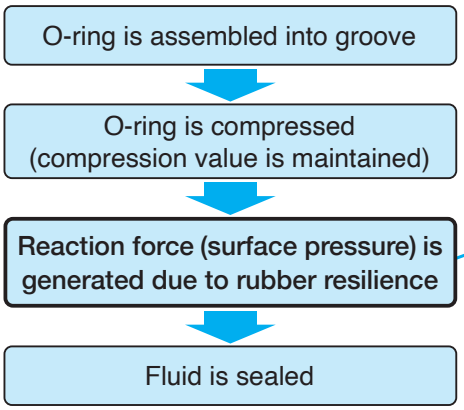

●Reaction force with no pressure applied




*A seal is formed by maintaining 'reaction force: P0' while no pressure is applied.

(2) Required Characteristics for O-Ring Materials

As the stress generated due to squeezing and compression of the O-ring causes it to provide a sealing function, one of the basic required characteristics is that the material maintains an adequate degree of stress within a range where abnormal deformation does not occur. It is also required that these basic characteristics are not lost during use. Of the materials that possess such characteristics, synthetic rubber is the best choice for such purposes. With that said, however, since it is not possible to fulfill all of these characteristics using just a single material, it is necessary to choose the right material depending on the specific application in which the product will be used.


NOK offers various types of materials that can meet a wide range of usage conditions.

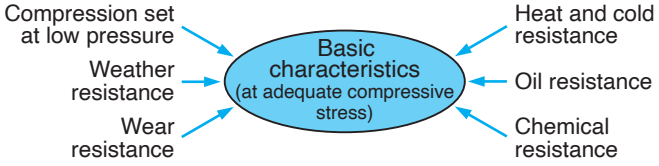

4. Types of O-Rings

The different types of standard NOK O-ring products are shown in Table 2-1.
NOK O-rings are offered in various dimensions as given for the following series of products: JIS P/G/V Series, ISO Equivalent Series, Old JASO, AS, NOK S/SS Series, and NOK Iron Rubber P/G Series.

Table 2-1





Type \ Application		For general machinery					For automobiles		For aircraft
O-ring 	Standard	JIS B 2401-1		ISO equivalent (for general industrial use)	NOK Iron Rubber P, G Standard (JIS B 2401 compliant)	NOK S standard NOK SS standard	Old JASO F404		AS568 (old ARP568)
	Classification by material	JIS	Usage details	Material	Material	Material	JASO	Usage details	Material
		NBR-70-1	(Mineral oil resistance)	A305	U801	A305 F201 E116	Class 1A	(General mineral oil resistance)	A305 A105 F201
		NBR-90	(Mineral oil resistance)				–	—	
		NBR-70-2	(Gasoline resistance)				Class 2	(Gasoline resistance)	
		FKM-70	(Heat resistance)				Class 3	(Animal and vegetable oil resistance)	
		FKM-90	(Heat resistance)				Class 4C	(Heat resistance)	
		Class 4C**	(Heat resistance)				Class 4D	(Heat resistance)	
		Class 5	(Water resistance)				Class 4E	(Heat resistance)	
							Class 5	(Coolant resistance)	
							H*	(Wear resistance)	
	Classification by application	·P Series (dynamic/static) ·G Series (static) ·V Series (vacuum flange)		Static	· P Series (dynamic/static) · G Series (stataic)	· S Series* (static sealing at low pressure) · SS Series* (static sealing at low pressure)	Thickness ø1.9 Series (old 1000 Series) Thickness ø2.4 Series (old 2000 Series) Thickness ø3.1 Series Thickness ø3.5 Series (old 3000 Series) (For all dynamic/static applications)		Static (old AN6227 is for dynamic sealing)
Shape and dimensions of O-ring installation groove		JIS B 2401-2 (dynamic/static) JIS B 2290 (vacuum flange)		—	JIS B 2401-2 (dynamic/static)	NOK S standard NOK SS standard	JASO F404		—
Backup rings		Equivalent to JIS B 2401-4				—	—		—
		T1  (Spiral)							
		T2  (Bias-cut)							
		T3  (Endless)							

Note: *The NOK S/SS Series has been designed as a series that meets the demand for O-rings with particularly smaller diameter and thickness for use in compact hardware.
Note: The JIS standards for O-Ring use in aircraft related applications (W1516, W1517, W2006, W1537, and W1538) have already been abolished.
*Material H is the NOK material code used for H-NBR (hydrogenated nitrile rubber).
**Material 4C corresponds to JIS B 2401-2005.

[Reference]

An introduction on cross-section shapes that differ with those of O-rings are given in Table 2-2. Please consult with NOK for more details.

Table 2-2

		O-ring	Square-ring	D-ring	X-ring
Shape					
Cylindrical surface	Reciprocating	○	—	◎	◎
	Static	○	—	—	—
Flat face static sealing		○	◎	—	—
Application		General use	Static sealing	Reciprocating	Low friction dynamic sealing
Characteristic		—	High reaction force and good sealing function	Shape for twisting resistance, small groove width	Twisting resistant, low friction

5. Temperature Ranges and Sealing Medium of

In order for an O-ring to properly function, it is necessary to select a material that is appropriate for the usage conditions. Please use Table 3-1 as a guide when selecting O-ring materials based on usage temperature and resistance to the sealing medium.

Table 3-1 Selecting Materials for NOK O-Rings

NOK O-ring Materials			Hardness	Guide for usage temperature range *1 (℃)	Major usage examples	Application series	JIS, JASO
Material name (material code)	Characteristic	Material code	(Durometer A)	Numbers in parentheses ( ) indicate max. values −50℃ 0℃ 100℃ 200℃			
Nitrile rubber (NBR)	Widely used as a sealing material for various products, and it has the best balance of performance and workability.	A402	60	−26 100 (120)	General use		
		A122	70	−22 80 (100)	Use w/ fuel	P·G·JASO	JIS NBR-70-2/ JASO class 2
		A305	70	−24 100 (120)	General use	P·G·V·JASO·AS·ISO·S·SS	JIS NBR-70-1/ JASO class 1A
		A746	70	−25 100 (120)	Use w/ LPG		
		A980	80	−48 80 (100)	Low temp. use		
		A105	90	−23 100 (120)	General use	P·G·AS	JIS NBR-90
Ethylene propylene rubber (EPDM)	Possesses excellent ozone and heat resistant properties. Also having superior steam, cold, and LLC (coolant) resistance, etc.	E622	60	−40 130 (150)	Low μ (coefficient of friction) use w/ water		
		E116	70	−49 130 (150)	Use w/ water (general), use w/ brake fluid	P·G·S·JASO	JIS EPDM-70 equivalent / JASO class 5
		E575 (violet)	70	−46 130 (150)	Use w/ water, chlorine resistance	WEX	
		E700	70	−48 130 (150)	Use w/ water	WEX	
		E3040	70	−45 130 (150)	Biomass material	BE	
		E340	80	−48 130 (150)	Use w/ brake fluid		
		E619	90	−43 130 (150)	Use w/ brake fluid		JIS EPDM-90 equivalent
Silicone rubber (VMQ)	In addition to heat and cold resistance, excellent lubricant and water-resistant properties.	S532 (dark blue)	60	−44 200 (220)	General use		
		S503 (dark blue)	70	−48 200 (220)	General use	P·G·JASO	JIS class 4C equivalent / JASO class 4C
		S740 (red)	70	−48 200 (220)	Hydrolysis resistance		
		S811 (red)	70	−46 200 (220)	General use		JIS class 4C equivalent / JASO class 4C equivalent
Fluorosilicone rubber (FVMQ)	In addition to the properties of VMQ, superior fuel-resistant properties.	S924 (green)	70	−55 200 (220)	Use w/ fuel		
Hydrogenated nitrile rubber (HNBR)	Superior to NBR in terms of heat and oil resistance, mechanical strength, compression set resistance, and ozone resistance.	G636	60	−26 110 (130)	General use		
		G607	70	−22 110 (130)	General use		JIS HNBR-70 equivalent
		G861	75	−23 110 (130)	Use refrigerant		
		G859	80	−22 110 (130)	Use refrigerant		
		G2280	80	−40 110 (130)	Use refrigerant	RX	
		G506	90	−24 110 (130)	General use		JIS HNBR-90 equivalent
		G588	95	−21 110 (130)	High-pressure use		
Fluororubber (FKM)	Among the synthetic rubber materials, it possesses the best heat, oil, and fuel resistant properties.	F320	60	−16 200 (220)	General use		
		F201	70	−16 200 (220)	General use	P·G·V·JASO·AS·S·SS	JIS FKM-70/ JASO class 4D
		FP29	70	−15 200 (220)	hot water resistance	WEX	
		FP739 (brown)	70	−16 200 (220)	hot water resistance	WEX	
		F274	75	−16 200 (220)	Wear resistance		
		FL25	80	−30 200 (220)	low temp. use, use w/ fuel		
		FL68	80	−31 200 (220)	low temp. use, use w/ fuel		
		F753	80	−15 200 (220)	Wear resistance		
		F357	90	−15 200 (220)	Wear resistance		
		F940	90	−15 200 (220)	General use		JIS FKM-90
Acrylic rubber (ACM)	Superior to NBR in terms of heat resistance, resistant to mineral oils.	T134	60	−20 130 (150)	low CS (compression set)		
		T222 (brown)	70	−21 130 (150)	low CS (compression set)		
		T667	70	−21 130 (150)	low CS (compression set)		
		T767	70	−18 130 (150)	General use	JASO	JIS ACM-70 equivalent / JASO class 4E
Chloroprene rubber (CR)	Exhibits excellent mechanical strength and flexural fatigue resistance, etc.	M352	70	−44 100 (120)	General use		
Butyl rubber (IIR)	The least amount of gas permeability Among the various rubber materials.	B383	75	−51 120 (140)	General use, gas permeation resistance		
Styrene-butadiene rubber (SBR)	Superior wear resistance and an excellent balance of workability and performance.	R189	70	−51 80 (100)	Use w/ brake fluid	JASO	JASO class 3
Polyurethane rubber (AU)	High hardness, high elasticity, high mechanical strength, and excellent wear resistance.	U565	90	−35 80 (100)	High-pressure use		
		U801 (milky white)	94	−35 80 (100)	High-pressure use	Iron Rubber	

−50℃ 0℃ 100℃ 200℃

[*1 Usage temperatures]

Usage temperatures range can be affected by a variety of factors, such as sealing medium, usage conditions, and functional requirements. For more details, please consult with NOK.

Higher limit : These values have been determined by taking the results of air and heat aging testing into consideration. The temperatures indicated within the parentheses ( ) indicate heat resistance temperatures for temporary usage. Please avoid subjecting the product to such conditions during continuous, long-term usage.

Lower limit : TR_{10} has been applied to determine these values. TR is an abbreviation for Temperature-Retraction as defined in JIS K 6261, and the values indicate deformation resilience at low temperatures, and they are roughly equivalent to the degree of recovery of rubber elasticity. TR_{10} refers to the temperature at which 10% recovery from initial deformation is achieved, and it can be used as a guide for determining low temperature usage limits.

Standard Materials

Please make sure to inquire separately if you intend on using these products in applications for nuclear power, food related devices, or medical devices.

[*4 Rubber materials offered by NOK]

In addition to the materials listed in this table, NOK also offers rubber materials that can meet a wide variety of usage conditions.
For any materials not listed for the applicable series or other non-standard materials, since there are cases where they will require additional tooling, please consult with NOK for more details.

Lubricant oil								Hydraulic oil							Fuel			Water			Coolant		Chemical									Gas				Other			
Engine oil	Gear oil	Machine oil	Spindle oil	Freezer oil (mineral oil)	Cup grease	Lithium grease	Silicone grease	Turbine oil	Oil & water emulsion	Water & glycol	Phosphate ester oil	Silicone oil	Brake fluid	Torque converter oil	Diesel fuel/kerosene	Heavy oil	Gasoline	60°C or less	100°C or less	150°C or less	Water w/ antifreeze (LLC)	Water-based machining oil	20% hydrochloric acid solution	30% sulfuric acid solution	10% nitric acid solution	30% sodium hydroxide solution	Benzene	Trichloroethylene	Alcohol	Ethylene glycol	Acetone	LPG	Town gas	Ozone (atmospheric)	Refrigerant (R1234yf)	Food Sanitation Act *2	Water Supply Act *3	Vacuum atmosphere to 10^{-4} mmHg	Vacuum 10^{-4} to 10^{-9} mmHg
◎	◎	◎	◎	○	◎	◎	◎	◎	◎	○	×	◎	△	△	△	△	△	○	△	×	○	○	△	○	×	◎	×	×	○	◎	×	○	○	△	×			◎	
○	○	◎	◎	◎	◎	◎	◎	◎	◎	○	×	◎	△	◎	◎	○	○	○	△	×	○	○	△	○	×	◎	×	×	○	◎	×	◎	◎	△	△			◎	
◎	◎	◎	◎	○	◎	◎	◎	◎	◎	○	×	◎	△	△	△	△	△	○	△	×	○	○	△	○	×	◎	×	×	○	◎	×	○	○	△	×	*2	*3	◎	
○	○	◎	◎	◎	◎	◎	◎	◎	◎	○	×	◎	△	◎	◎	○	○	○	△	×	○	○	△	○	×	◎	×	×	○	◎	×	◎	◎	△	×			◎	
◎	○	○	○	○	◎	◎	○	○	○	○	×	○	△	△	△	△	△	○	△	×	○	○	△	○	×	◎	×	×	○	◎	×	○	○	△	×			◎	
◎	◎	◎	◎	○	◎	◎	◎	◎	◎	○	×	◎	△	△	△	△	△	○	△	×	○	○	△	○	×	◎	×	×	○	◎	×	○	○	△	×			◎	
×	×	×	×	×	×	×	○	×	△	◎	◎	◎	○	×	×	×	×	◎	◎	○	◎	△	◎	◎	○	◎	×	×	◎	◎	○	×	△	◎	○	*2	*3		
×	×	×	×	×	×	×	◎	×	△	◎	◎	◎	◎	×	×	×	×	◎	◎	○	◎	△	◎	◎	○	◎	×	×	◎	◎	○	×	△	◎	○	*2	*3		
×	×	×	×	×	×	×	◎	×	△	◎	◎	◎	◎	×	×	×	×	◎	◎	○	◎	△	◎	◎	○	◎	×	×	◎	◎	○	×	△	◎	○	*2	*3		
×	×	×	×	×	×	×	◎	×	△	◎	◎	◎	◎	×	×	×	×	◎	◎	○	◎	△	◎	◎	○	◎	×	×	◎	◎	○	×	△	◎	○	*2	*3		
×	×	×	×	×	×	×	◎	×	△	◎	◎	◎	◎	×	×	×	×	◎	◎	○	◎	△	◎	◎	○	◎	×	×	◎	◎	○	×	△	◎	○	*2	*3		
×	×	×	×	×	×	×	◎	×	△	◎	◎	◎	◎	×	×	×	×	◎	◎	○	◎	△	◎	◎	○	◎	×	×	◎	◎	○	×	△	◎	○	*2			
×	×	×	×	×	×	×	◎	×	△	◎	◎	◎	◎	×	×	×	×	◎	◎	○	◎	△	◎	◎	○	◎	×	×	◎	◎	○	×	△	◎	○	*2			
△	△	○	△	△	△	◎	×	○	△	△	○	×	○	△	×	×	×	○	○	×	△	△	△	○	×	×	×	△	○	◎	△	×	△	◎	×	*2			
△	△	○	△	△	△	◎	×	○	△	△	○	×	○	△	×	×	×	○	○	×	△	△	△	○	×	×	×	△	○	◎	△	×	△	◎	×	*2			
△	△	○	△	△	△	◎	×	○	△	△	○	×	○	△	×	×	×	○	○	△	○	○	△	○	×	×	×	△	○	◎	△	×	△	◎	×	*2			
△	△	○	△	△	△	◎	×	○	△	△	○	×	○	△	×	×	×	○	○	×	△	△	△	○	×	×	×	△	○	◎	△	×	△	◎	×	*2			
△	△	○	△	△	△	◎	△	○	△	△	○	△	○	△	○	○	○	○	○	×	△	△	△	○	×	×	×	×	○	◎	△	×	△	◎	×				
◎	◎	◎	◎	○	◎	◎	◎	◎	◎	○	×	◎	△	△	△	△	△	◎	○	×	○	○	△	○	×	◎	×	×	○	◎	×	○	○	○	△	*2		◎	
◎	◎	◎	◎	○	◎	◎	◎	◎	◎	○	×	◎	△	△	○	△	△	◎	○	×	○	○	△	○	×	◎	×	×	○	◎	×	○	○	○	△	*2		◎	
◎	◎	◎	◎	○	◎	◎	◎	◎	◎	○	×	◎	△	△	△	△	△	◎	○	×	○	○	△	○	×	◎	×	×	○	◎	×	○	○	○	◎			◎	
◎	◎	◎	◎	○	◎	◎	◎	◎	◎	○	×	◎	△	△	△	△	△	◎	○	×	○	○	△	○	×	◎	×	×	○	◎	×	○	○	○	◎	*2		◎	
◎	◎	◎	◎	○	◎	◎	◎	◎	◎	○	×	◎	△	△	△	△	△	◎	○	×	○	○	△	○	×	◎	×	×	○	◎	×	○	○	○	△			◎	
◎	◎	◎	◎	○	◎	◎	◎	◎	◎	○	×	◎	△	△	△	△	△	◎	○	×	○	○	△	○	×	◎	×	×	○	◎	×	○	○	○	△			◎	
○	○	◎	◎	◎	◎	◎	◎	○	△	△	◎	◎	△	○	◎	◎	◎	◎	○	×	△	△	○	○	△	×	△	△	○	◎	×	◎	◎	◎	×	*2		◎	
○	○	◎	◎	◎	◎	◎	◎	○	△	△	◎	◎	△	○	◎	◎	◎	◎	○	×	△	△	○	○	△	×	△	△	○	◎	×	◎	◎	◎	×	*2	*3	◎	◎
◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	◎	◎	△	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	◎	◎	△	△	△	○	◎	×	◎	◎	◎	×	*2	*3	◎	
◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	◎	◎	△	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	◎	◎	△	△	△	○	◎	×	◎	◎	◎	×	*2	*3	◎	
○	○	◎	◎	◎	◎	◎	◎	○	△	△	◎	◎	△	○	◎	◎	◎	◎	○	×	△	△	○	○	△	×	△	△	○	◎	×	◎	◎	◎	×	*2		◎	
◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	◎	◎	△	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	◎	◎	△	△	△	○	◎	×	◎	◎	◎	×			◎	
◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	◎	◎	△	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	◎	◎	△	△	△	○	◎	×	◎	◎	◎	×			◎	◎
○	○	◎	◎	◎	◎	◎	◎	○	△	△	◎	◎	△	○	◎	◎	◎	◎	○	×	△	△	○	○	△	×	△	△	○	◎	×	◎	◎	◎	×			◎	
○	○	◎	◎	◎	◎	◎	◎	○	△	△	◎	◎	△	○	◎	◎	◎	◎	○	×	△	△	○	○	△	×	△	△	○	◎	×	◎	◎	◎	×			◎	
○	○	◎	◎	◎	◎	◎	◎	○	△	△	◎	◎	△	○	◎	◎	◎	◎	○	×	△	△	○	○	△	×	△	△	○	◎	×	◎	◎	◎	×			◎	
◎	◎	◎	○	○	○	◎	◎	◎	×	×	×	◎	×	◎	×	×	×	×	×	×	×	×	△	△	×	×	×	×	×	△	×	△	○	◎	×			◎	
◎	◎	◎	○	○	○	◎	◎	◎	×	×	×	◎	×	◎	×	×	×	×	×	×	×	×	△	△	×	×	×	×	×	△	×	△	○	◎	×			◎	
◎	◎	◎	○	○	○	◎	◎	◎	×	×	×	◎	×	◎	×	×	×	×	×	×	×	×	△	△	×	×	×	×	×	△	×	△	○	◎	×			◎	
◎	◎	◎	○	○	○	◎	◎	◎	×	×	×	◎	×	◎	×	×	×	×	×	×	×	×	△	△	×	×	×	×	×	△	×	△	○	◎	×			◎	
△	△	△	△	△	○	○	○	△	△	△	△	△	△	△	×	×	×	○	△	×	△	△	△	○	×	△	×	×	○	◎	×	△	△	○	△			◎	
×	×	×	×	×	×	×	○	×	△	○	×	○	○	×	×	×	×	○	○	×	△	△	○	○	×	◎	×	×	◎	◎	△	×	△	△	○			◎	
×	×	×	×	×	×	×	○	×	△	○	×	○	◎	×	×	×	×	○	△	×	△	△	○	○	×	◎	×	×	◎	◎	△	×	△	△	×				
○	△	◎	◎	◎	○	○	◎	◎	△	△	×	◎	×	○	△	△	×	△	×	×	△	△	×	×	×	×	×	×	△	△	×	○	○	○	×				
○	○	◎	◎	◎	○	○	◎	◎	△	△	×	◎	×	○	△	△	×	△	×	×	△	△	×	×	×	×	×	×	△	△	×	○	○	○	×				

◎: Resistant ○: Resistant except in specific conditions* △: Not resistant except in specific conditions* ×: Not resistant *Consult with NOK before use.

[*2 The Food Sanitation Act of Japan]

These indicate materials that meet the specifications of the Food Sanitation Act (Ministry of Health and Welfare, Ordinance No. 85). Since they will require exclusively dedicated production processes, please make sure to inquire separately if you are using such O-rings for food related devices.

[*3 The Water Supply Act of Japan]

These indicate materials that meet the specifications of the Water Supply Act JIS S3200-7 (2004). Since they will require exclusively dedicated production processes, please make sure to inquire separately if you are using such O-rings for water supply related devices.

6. Standard Values and Actual Values for O-Ring

Table 4-1 Standard Values and Actual Values [The actual measurement values shown below are not guaranteed values.]

Type of material / Test item	JIS	NBR-70-1		NBR-90		NBR-70-2	
	Applicable NOK number	A305		A105		A122	
	Usage details	(For mineral oil resistance)		(For mineral oil resistance)		(For gasoline resistance)	
	(Standard values/ actual values)	Standard values	Actual values	Standard values	Actual values	Standard values	Actual values
Standard physical properties	Hardness (durometer A)	70±5	71	90±5	91	70±5	71
	Tensile strength (MPa)	≧10	20.8	≧14	18.1	≧10	20.9
	Elongation (%)	≧250	340	≧100	150	≧200	420
	Tensile stress (MPa) (at 100% elongation)	≧2.5	4.5	—		≧2.5	4.3
Aging	Temp. and time	72 hours at 120°C		72 hours at 120°C		72 hours at 100°C	
	Change in hardness (points)	≦+10	+3	≦+10	+3	≦+10	+4
	Change in tensile strength (%)	≧−15	+2	≧−25	+10	≧−15	+4
	Change in elongation (%)	≧−45	−7	≧−55	−37	≧−40	−23
Compression set	Temp. and time	72 hours at 120°C		72 hours at 120°C		72 hours at 100°C	
	Compression set (%)	≦40	13	≦40	26	≦25	18
Oil resistance test 1	Temp. and time	72 hours at 120°C		72 hours at 120°C		72 hours at 23°C	
	Oil tested	Lubricant oil No.1		Lubricant oil No.1		Fuel oil No.1	
	Change in hardness (points)	−5 - +8	±0	−5 - +8	+3	−8 - 0	−1
	Change in tensile strength (%)	≧−15	+2	≧−20	−13	≧−15	−4
	Change in elongation (%)	≧−40	−12	≧−40	−23	≧−25	−5
	Change in volume (%)	−8 - +5	−3.6	−8 - +5	−4.3	−3 - +5	+0.6
Oil resistance test 2	Temp. and time	72 hours at 120°C		72 hours at 120°C		72 hours at 23°C	
	Oil tested	Lubricant oil No.3		Lubricant oil No.3		Fuel oil No.2	
	Change in hardness (points)	−15 - 0	−7	−10 - +5	−8	−20 - 0	−12
	Change in tensile strength (%)	≧−25	−11	≧−35	−13	≧−45	−32
	Change in elongation (%)	≧−35	−13	≧−35	−13	≧−45	−32
	Change in volume (%)	0 - +20	+11.8	0 - +20	+10.7	0 - +30	+24.3
Low temp. test	TR_{10} value (°C) at 50% elongation	≧−15	−24	≧−15	−23	≧−10	−22

The TR_{10} value (abbreviation for Temperature-Retraction) indicates deformation resilience at low temperatures, and this is roughly equivalent to the degree of recovery of rubber elasticity based on the rubber material's properties.

Since O-rings function by rubber elasticity, it is possible to estimate the low temperature performance of that material by identifying this TR value,.
Furthermore, the value $_{10}$ in TR_{10} indicates that the temperature shown represents the temperature at which 10% recovery is achieved from initial deformation, and based on experiential knowledge, it is understood that temperatures in the vicinity of these values represent the low temperature limits of the O-ring.

Standard Materials

**Material class 4C corresponds to JIS B 2401-2005.

FKM-70		FKM-90		Class 4C**		JIS	Type of material / Test item
F201		F940		S503		Applicable NOK number	
(For heat resistance)		(For heat resistance)		(For heat resistance)		Usage details	
Standard values	Actual values	Standard values	Actual values	Standard values	Actual values	(Standard values/ actual values)	
70±5	71	90±5	92	70±5	70	Hardness (durometer A)	Standard physical properties
≧10	14.2	≧10	17.0	≧3.4	6.1	Tensile strength (MPa)	
≧170	230	≧80	140	≧60	150	Elongation (%)	
≧2.0	4.1	—		—	4.9	Tensile stress (MPa) (at 100% elongation)	
72 hours at 230°C		72 hours at 230°C		24 hours at 230°C		Temp. and time	Aging
≦+5	−2	≦+5	±0	≦+10	+1	Change in hardness (points)	
≧−10	+2	≧−10	−5	≧−10	+12	Change in tensile strength (%)	
≧−25	−8	≧−25	+5	≧−25	−6	Change in elongation (%)	
72 hours at 200°C		72 hours at 200°C		22 hours at 175°C		Temp. and time	Compression set
≦40	21	≦40	12	≦30	10	Compression set (%)	
72 hours at 175°C		72 hours at 175°C		70 hours at 175°C		Temp. and time	Oil resistance test 1
Lubricant oil No.1		Lubricant oil No.1		Lubricant oil No.1		Oil tested	
−10 - +5	±0	−10 - +5	−2	−10 - +5	−5	Change in hardness (points)	
≧−20	+2	≧−20	+9	≧−20	+1	Change in tensile strength (%)	
≧−20	−4	≧−20	+3	≧−20	+2	Change in elongation (%)	
−5 - +5	±0.0	−5〜+5	+0.9	0 - +10	+4.5	Change in volume (%)	
72 hours at 175°C		72 hours at 175°C		—		Temp. and time	Oil resistance test 2
Lubricant oil No.3		Lubricant oil No.3		—		Oil tested	
−10 - +5	−2	−10 - +5	−1	—		Change in hardness (points)	
≧−20	−7	≧−20	+3	—		Change in tensile strength (%)	
≧−20	+9	≧−20	+4	—		Change in elongation (%)	
−5 - +5	+2.4	−5 - +5	+1.9	—		Change in volume (%)	
≧−10	−15	≧−10	−15	—	−48	TR_{10} value (°C) at 50% elongation	Low temp. test

Table 4-2 Standard Values and Actual Values [The actual measurement values shown below are not guaranteed values.]

Type of material / Test item	JIS	Class 3		Class 4E		Class 5		H*	
	Applicable NOK number	R189		T767		E116		G607	
	Usage details	(For animal and vegetable oil resistance)		(For heat resistance)		(For coolant resistance)		(For wear resistance)	
	(Standard values/ actual values)	Standard values	Actual values	Standard values	Actual values	Standard values	Actual values	Standard values	Actual values
Standard physical properties	Hardness (durometer A)	70±5	73	70±5	73	70±5	72	70±5	70
	Tensile strength (MPa)	≧9.8	19.4	≧5.9	12.8	≧9.8	18.5	≧16.7	23.5
	Elongation (%)	≧150	240	≧100	180	≧150	210	≧150	240
	Tensile stress (MPa) (at 100% elongation)	≧2.7	6.1	—		>2.7	5.5	—	
Aging	Temp. and time	70 hours at 100°C		70 hours at 150°C		70 hours at 120°C		70 hours at 120°C	
	Change in hardness (points)	≦+10	+2	≦+10	+2	<+10	+1	<+10	+5
	Change in tensile strength (%)	≧−15	−6	≧−30	+2	<−20	−2	<−15	+4
	Change in elongation (%)	≧−45	−9	≧−40	−7	<−40	−4	<−40	−4
Compression set	Temp. and time	70 hours at 100°C		70 hours at 150°C		70 hours at 120°C		70 hours at 120°C	
	Compression set (%)	≦25	10	≦60	30	<40	5	<20	10
Oil resistance test 1	Temp. and time	70 hours at 100°C		70 hours at 150°C		70 hours at 100°C		70 hours at 120°C	
	Oil tested	Brake fluid		Lubricant oil No.1		Coolant		Lubricant oil No.1	
	Change in hardness (points)	−15 - 0	−3	−7 - +10	−3	−5 - +5	+1	−5 - +10	+5
	Change in tensile strength (%)	≧−40	−5	≧−30	+2	≧−30	−16	≧−20	−4
	Change in elongation (%)	≧−40	−11	≧−40	−7	≧−30	−6	≧−35	−10
	Change in volume (%)	0 - +12	+2.5	−5 - +5	−0.3	−5 - +10	+1.2	−15 - +5	−5.2
Oil resistance test 2	Temp. and time	—		70 hours at 150°C		—		70 hours at 120°C	
	Oil tested	—		Lubricant oil No.3		—		Lubricant oil No.3	
	Change in hardness (points)	—		−20 - 0	−13	—		−10 - +10	+1
	Change in tensile strength (%)	—		≧−40	−15	—		≧−30	+4
	Change in elongation (%)	—		≧−40	−9	—		≧−30	−6
	Change in volume (%)	—		0 - +30	+15.9	—		−10 - +10	+3.3
Low temp. test	TR_{10} value (°C) at 50% elongation	—	−51	—	−18	—	−49	—	−22

The TR_{10} value (abbreviation for Temperature-Retraction) indicates deformation resilience at low temperatures, and this is roughly equivalent to the degree of recovery of rubber elasticity based on the rubber material's properties.

Since O-rings function by rubber elasticity, it is possible to estimate the low temperature performance of that material by identifying this TR value,.
Furthermore, the value $_{10}$ in TR_{10} indicates that the temperature shown represents the temperature at which 10% recovery is achieved from initial deformation, and based on experiential knowledge, it is understood that temperatures in the vicinity of these values represent the low temperature limits of the O-ring.

*Material H refers to the NOK material code for hydrogenated nitrile rubber.

NOK WEX Series				NOK RX Series	NOK BE Series	NOK Iron Rubber Series	JIS	Type of material / Test item
E700	E575	FP29	FP739	G2280	E3040	U801	Applicable NOK number	
(For use w/ water)		(For use w/ water)		(For refrigerant)	(Biomass material)	(For pressure/wear resistance)	Usage details	
Actual values	Actual values	Actual values	Actual values	Actual values	Actual values	Actual values	(Standard values/ actual values)	
71	72	72	72	80	71	94	Hardness (durometer A)	Standard physical properties
19.1	15.0	19.7	19.8	22.2	19.2	43.1	Tensile strength (MPa)	
210	200	320	300	150	160	550	Elongation (%)	
—	—	—	—	—	—	—	Tensile stress (MPa) (at 100% elongation)	
70 hours at 120°C		70 hours at 230°C		70 hours at 120°C	70 hours at 120°C	80°C 70h	Temp. and time	Aging
+2	+1	+2	+1	+3	±0	±0	Change in hardness (points)	
−3	+15	+9	−4	+4	−1	+1	Change in tensile strength (%)	
−8	+11	+1	+3	−4	−7	+2	Change in elongation (%)	
70 hours at 120°C		70 hours at 175°C		70 hours at 120°C	70 hours at 120°C	80°C 70h	Temp. and time	Compression set
6	6	10	13	12	5	32	Compression set (%)	
70 hours at 100°C		70 hours at 100°C		70 hours at 120°C	70 hours at 100°C	80°C 70h	Temp. and time	Oil resistance test 1
Steam		Steam		Freezer oil (PAG)	Steam	Lubricant oil No.1	Oil tested	
+1	+1	±0	−2	±0	−1	±0	Change in hardness (points)	
−4	−11	−15	−7	+2	−1	±0	Change in tensile strength (%)	
±0	−2	+6	+6	+1	−3	−2	Change in elongation (%)	
+0.5	+0.4	+3.5	+2.9	−2.3	+0.3	−0.3	Change in volume (%)	
—	—	70 hours at 150°C		70 hours at 120°C	—	80°C 70h	Temp. and time	Oil resistance test 2
—	—	Water vapor		Freezer oil (POE)	—	Lubricant oil No.3	Oil tested	
—	—	−3	±0	−9	—	±0	Change in hardness (points)	
—	—	−18	−12	+4	—	−3	Change in tensile strength (%)	
—	—	+8	+2	−1	—	−4	Change in elongation (%)	
—	—	+4.4	+2.0	+13.4	—	+5.4	Change in volume (%)	
−48	−48	−16	−16	−40	−45	−29	TR_{10} value (°C) at 50% elongation	Low temp. test

※PAG : Polyalkylene glycol
POE : Polyol ester

7. O-Ring Design Standards

Please refer to the following for the different concepts and dimensional standards related to proper O-ring usage.

(1) Concepts Related to O-Ring Functioning

Fig. 1-1 shows a graph that depicts the relationship between O-ring compression ratio and compression set. As shown in Fig. 1-1, O-rings made of rubber pose a risk of compression cracking when the ratio is 40% or higher. If the compression ratio becomes too low, there is a risk that leakage may occur.

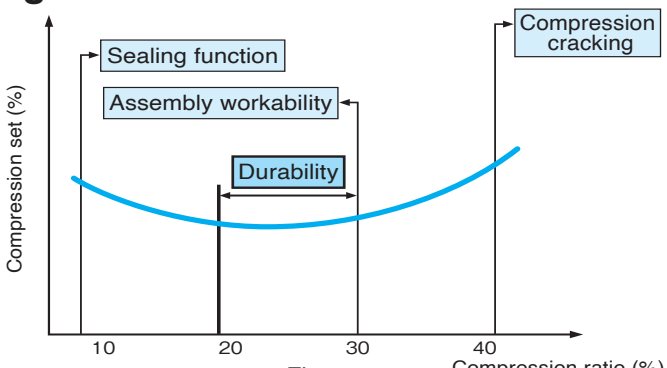
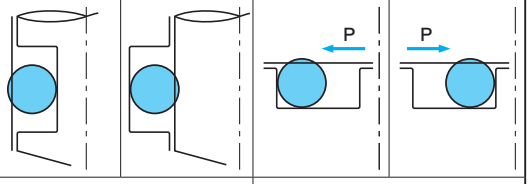


Fig. 1-1

(2) Standards for Determining O-Ring Groove Dimensions

Table 5-1 shows the general NOK setting values. Please consult with NOK if your requirements are for dynamic sealing in low friction applications or if you have specialized specifications.

Table 5-1

Type	Cylindrical surface		Flat face	
	Piston seal	Rod seal	Internal pressure seal	External pressure seal
Schematic				
Compression ratio (%)	8 – 25		8 – 30	
Filling ratio (%)	Target median value of 75%, max. 90% or less			
Determining inside/ outside diameter	Inside diameter elongation ratio [%] 0 – 5	Outside diameter elongation ratio [%] 0 – 3	Contacting wall on non-pressurized side: Outside wall diameter = seal outside diameter	Contacting wall on non-pressurized side: Inside wall diameter = seal inside diameter

(3) Selecting O-Ring Thickness

The relationship between O-ring thickness and compression set is shown in Fig. 1-2. As shown in the figure, when the compression ratio is fixed, compression set becomes lower as thickness becomes thicker, and based on this, it is possible to achieve stable sealing performance by selecting thicker O-rings. In particular, when selecting products for dynamic sealing, it is possible to prevent twisting by selecting a thicker item.

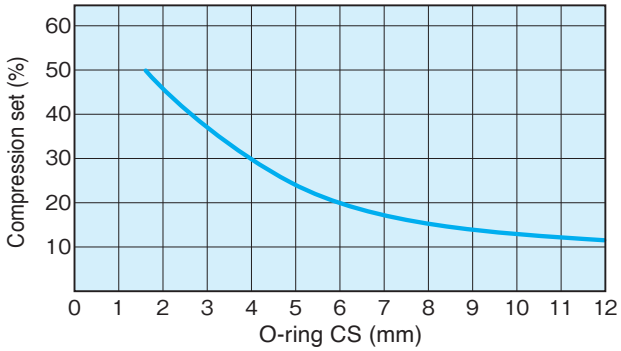


Fig. 1-2 Compression Ratio of 25% for A305 (exposed to air for 70 hours at 120°C)

(4) Surface Roughness of Groove

The surface roughness of the portions contacting the O-ring are indicated in Table 5-2. Please consult with NOK if you encounter any issues during design or product usage.


Table 5-2 *Rz: Max. roughness height

Hardware portion	Application	Type of pressure applied		Surface roughness Ra	Surface roughness Rz
Groove side and bottom face	Static sealing	Without pulse	Flat face	3.2	12.5
			Cylindrical face	1.6	6.3
		With pulse		1.6	6.3
	Dynamic sealing	Using a backup ring		1.6	6.3
		Not using a backup ring		0.8	3.2
Contacting face of O-ring seal portion	Static sealing	Without pulse		1.6	6.3
		With pulse		0.8	3.2
	Dynamic sealing	—		0.4	1.6
Chamfered portion for O-ring installation	—	—		3.2	12.5

Compliant with JIS B 2401-2:2012
Indications for surface roughness listed in this catalog comply with JIS B 0601:2001.


As surface roughness of the groove portions can impact the following, it will be necessary to control these factors.

- For dynamic sealing: Friction and wear resistance
- For static sealing: Secure sealing due to conforming (gripping) of rubber to the mating surface

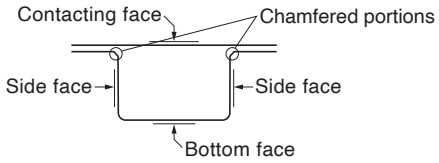

(5) Clearance Gaps and Extrusion

If an O-ring is pushed into a clearance gap within the groove due to sealing fluid pressure, and this further progresses to where heavy extrusion occurs, it will no longer be able to maintain its functionality.
Such extrusion is determined by fluid pressure, clearance, and rubber hardness. Please refer to Fig. 1-3 for an illustration of this relationship (for these values it is assumed that there is no groove deformation due to pressure; if there is a risk of deformation of the sealing surface due to pressure, clearance should be set to roughly 75% of these values).

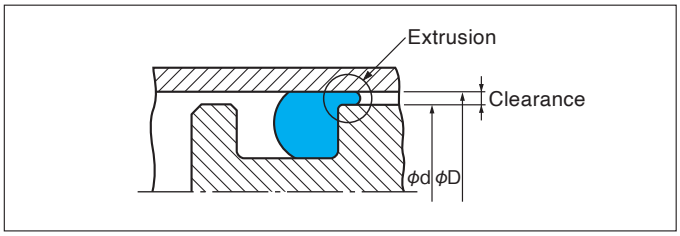

[Test conditions]

1. No backup rings are used.
2. Cylinder swelling due to fluid pressure is assumed to be 0.
3. For the results shown, the pressure cycle ranges from 0 to the indicated pressure, and testing has been performed for 100,000 cycles at 150 cycles/minute.

Note) For cases involving usage for cylindrical surfaces, it is necessary to take into consideration the effects of eccentricities, etc. Please consult with NOK when designing such applications.

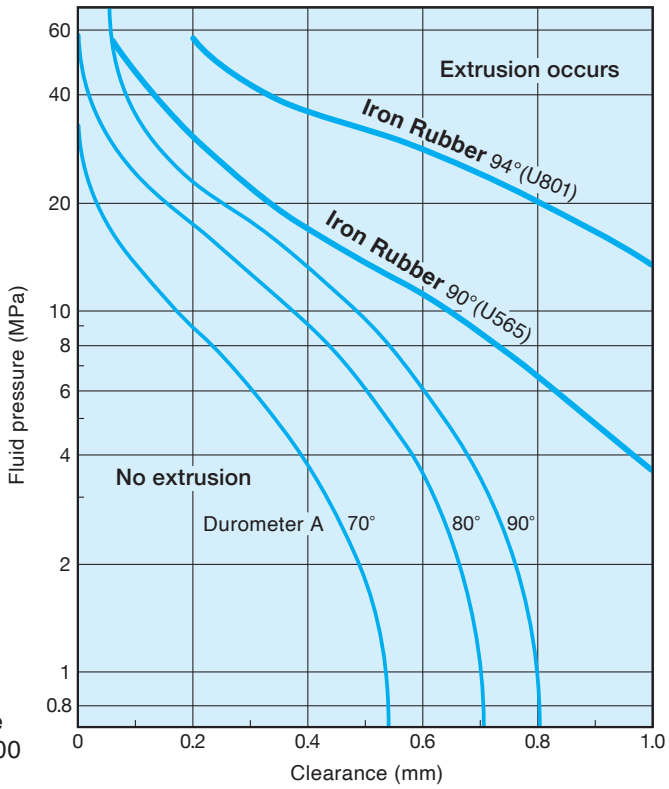


Fig. 1-3 O-Ring Extrusion Limits

[Countermeasures to Prevent Extrusion (About the Usage of Backup Rings)]

If pressure or clearance exceeds the limits shown in Fig. 1-3, please consider to use backup rings. In case where pressure is being applied from both directions, install backup rings on both sides, and in case where pressure is being applied from one direction, install it on the side opposite from which pressure is being applied. Backup rings come in 3 types of shapes, namely, endless type, bias-cut type, and spiral type, and although the endless type is the most effective from a usage standpoint, the bias-cut type is convenient due to its easy installation. Some typical materials used for backup rings and their characteristics are shown in Table 5-3.

For more detailed O-ring and groove dimensions, please refer to pages 22 through 61.
For more detailed backup ring dimensions, please refer to pages 62 through 65.
*Only 10FF is available for NOK standard parts.

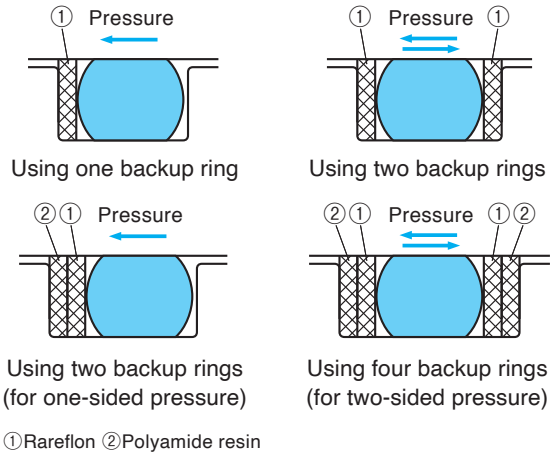


Table 5-3

Material name	NOK material code	Characteristic	Pressure resistance
Rareflon (polytetrafluoro-ethylene)	10FF (standard parts)	Pure PTFE. Material that has superior heat, cold, and chemical resistance.	low ↕ high
	19YF	Standard material that has excellent extrusion and wear resistance even under high-pressure conditions.	
	49YF	Specialized material with further improved extrusion resistance compared to 19YF.	
Polyamide resin	80NP	Material for high-pressure use that has excellent extrusion and wear resistance, and it can be used for large-sized products made through machining.	
	12NM	Material for injection molding that has performance equivalent to 80NP, and it is less susceptible to dimensional changes caused by the absorption of moisture.	


* Polyamide resins may undergo dimensional changes due to the absorption of humidity. Please consult with NOK if you require moisture-proof packaging.

8. O-Ring Usage Methods (Types of Grooves) and Precautions


O-ring usage methods (groove types) and some precautions to observe are shown below.
As shown in Fig. 1-1 on page 14, it is necessary to take assembly workability into consideration when determining O-ring compression ratios. Such considerations are necessary to prevent the O-ring from being damaged due to scraping, gouging, or pinching during assembly and to avoid reduced workability during assembly due to increased rubber reaction force.
From these reasons above, NOK recommends to set values of compression ratios, lower than their functional limit values. The reason why NOK recommends the compression ratios for cylindrical surface applications lower than flat face static applications is such assembly related considerations.
For more details on groove dimensions, please also refer to pages 22 to 61.

(1) For Cylindrical Surface Sealing

This method is used to form a seal using the inside and outside diameter surfaces of the O-ring as shown in Fig. 2-1. More careful consideration must be given toward assembly when compared to flat face static applications.
For dynamic sealing, although it is vital to consider sealing performance, if it is set to a low compression value, this results in decreased sliding resistance.

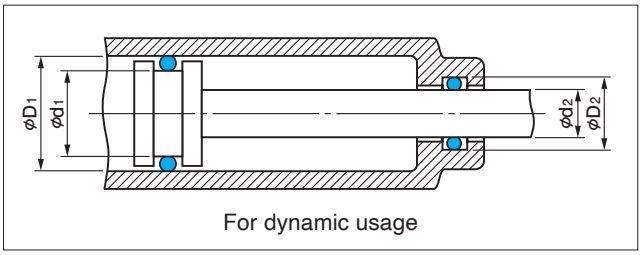

For dynamic usage

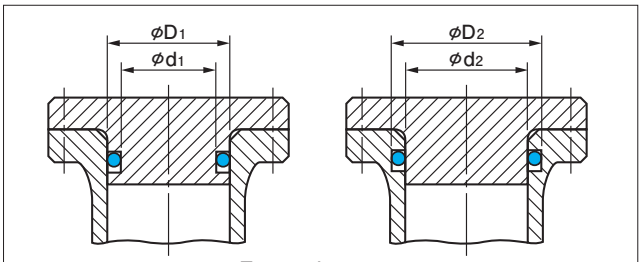


For static usage

Fig. 2-1 Introduction on Cylindrical Surface Sealing Methods

(2) For Flat Face Static Sealing

- This method is used to form a seal using the top and bottom faces of the O-ring as shown in the figure to the right. As shown in Fig. 2-2, flat face static sealing can be categorized into 2 types: a) applications where internal pressure is applied and b) applications where external pressure is applied.
  NOK recommends in-groove O-ring positioning as following..
  - For internal pressure application (a): O-ring outside diameter should be aligned with groove dimension D.
  - For external pressure application (b): O-ring inside diameter should be aligned with groove dimension d.

  Since the typical installation process will not be affected, a compression ratio larger than that applied for cylindrical surface applications is recommended when taking into consideration such factors as bolt elongation and flange deformation due to the pressure of applications.
  Usage is not recommended in case where walls have not been added as shown in (c), since there is a risk that pressure fluctuations could result in wear or falling out of the O-ring.
- In case where the inside diameter is relatively large (ø150 or more) and thickness is relatively small (ø3 or less), since there is a risk that a portion of the O-ring could get torn off if it slips out and is squeezed as shown in Fig. 2-3, we recommend the usage of a product that is as thick as possible to prevent such pinching during assembly.
- Regarding O-rings with small inside diameters, since they may slip out during assembly making them difficult to assemble, please make sure to pay careful attention to such factors when selecting these items.
- Although there is a risk that failure may occur during installation for O-rings with relatively small dimensions (approx. ø30 or less), it is possible to alleviate such assembly related issues by selecting a product with a slightly larger D dimension (approx. 0.2 to 0.3 mm larger) for internal pressure applications or by selecting a product with a slightly smaller d dimension (approx. 0.2 to 0.3 mm smaller) for external pressure applications.

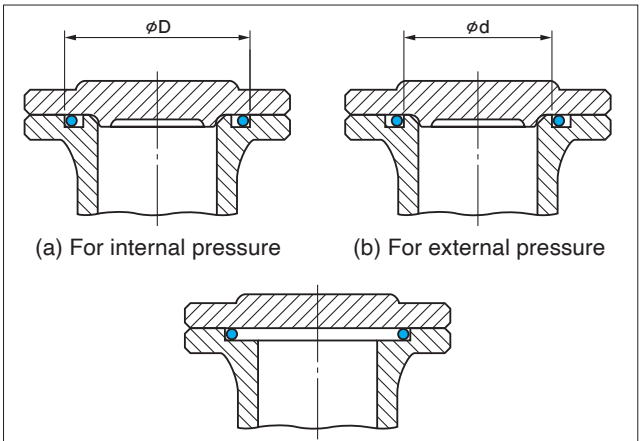

(a) For internal pressure (b) For external pressure

(c) Non-recommended usage example

Fig. 2-2 Introduction on Flat Face Static Sealing Methods

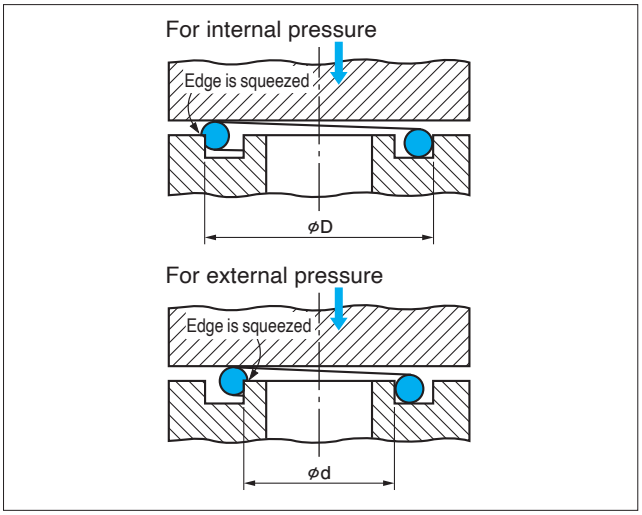


Fig. 2-3

(3) Types of Grooves

a) NOK's recommended groove structure is shown in Fig. 2-4. Additionally, other examples of groove structures are also indicated in Fig. 2-5 and Fig. 2-6. Since compression ratio and filling ratio for these additional groove shapes fall outside of NOK standards, they are only shown here for reference purposes.
For all of these structures, it is necessary to be careful about burrs and sharp edges to prevent the seal from being damaged.


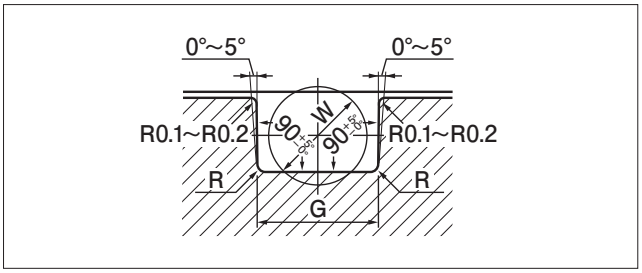


Fig. 2-4

[Reference]

b) Triangular groove applications

Although triangular grooves are occasionally used for the purposes of hardware simplicity, since triangular grooves cause compression of the O-ring from three directions as shown in Fig. 2-5, this will result in relatively high compression set for the O-ring.
When using this structure, for dimensions D and d shown in Fig. 2-5, please comply with the groove dimensions D and d given in the dimension table.
Additionally, dimension G should be set to 1.3 to 1.4 times W (W: O-ring thickness).

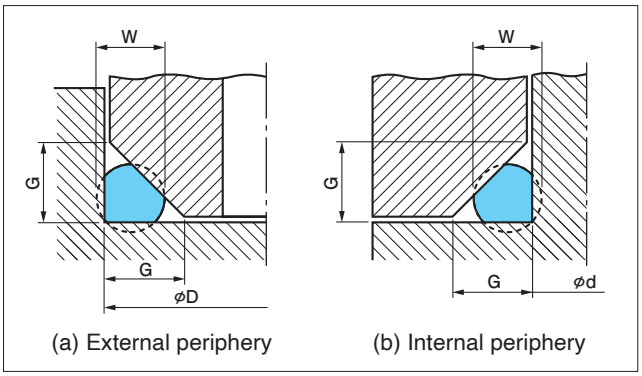


(a) External periphery (b) Internal periphery

Fig. 2-5

c) Dovetail grooves applications

Although such structures are occasionally selected with the aim of preventing the O-ring from slipping out, they have a disadvantage of having a higher filling ratio.
It is necessary to be careful to prevent the occurrence of such issues as scratching or compression cracking of the seal during assembly. Please consult with NOK for information on more detailed dimensions.

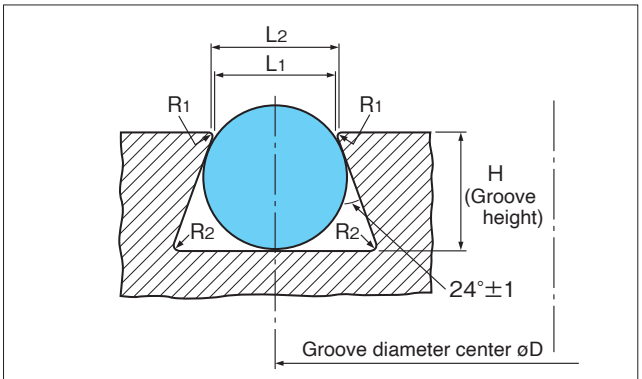

* The O-ring diameter center should be set so that it aligns with the groove diameter center.

Fig. 2-6

1 Determining General Use Dovetail Groove Dimensions [For Reference]

(Unit: mm)

O-rings			L_1±0.05	L_2	$H_{-0.05}^{0}$	R_1	R_2MAX
Standard	Nominal number	Thickness (d_2)	Before chamfering	After chamfering			
JIS B 2401-1	P3 - P10	1.9 ±0.08	1.55	1.70	1.4	0.15	0.40
	P10A - P22	2.4 ±0.09	2.00	2.20	1.8	0.20	0.40
	P22A - P50	3.5 ±0.10	2.95	3.15	2.8	0.20	0.80
	P48A - P150	5.7 ±0.13	4.75	5.20	4.7	0.40	0.80
	P150A - P400	8.4 ±0.15	7.10	7.65	7.0	0.50	1.60
	G25 - G145	3.1 ±0.10	2.60	2.80	2.4	0.20	0.80
	G150 - G300	5.7 ±0.13	4.75	5.20	4.7	0.40	0.80
AS568	004 - 050	1.78 ±0.07	1.45	1.60	1.30	0.15	0.40
	102 - 178	2.62 ±0.07	2.15	2.45	2.00	0.25	0.40
	201 - 284	3.53 ±0.10	2.95	3.20	2.80	0.25	0.80
	309 - 395	5.33 ±0.12	4.45	4.85	4.35	0.40	0.80
	425 - 475	6.98 ±0.15	5.95	6.35	5.75	0.40	1.60

2 Determining Vacuum Use Dovetail Groove Dimensions [For Reference]

(Unit: mm)

O-rings			L_1±0.05	L_2	$H_{-0.05}^{0}$	R_1	R_2MAX
Standard	Nominal number	Thickness (d_2)	Before chamfering	After chamfering			
JIS B 2401-1	P22A - P50	3.5 ±0.10	3.05	3.25	2.5	0.20	0.80
	P48A - P150	5.7 ±0.13	4.95	5.40	4.2	0.40	0.80
	P150A - P400	8.4 ±0.15	7.35	7.90	6.3	0.50	1.60
	P150A - P400	4 ±0.10	3.45	3.75	2.9	0.30	0.80
	V15 - V175	6 ±0.13	5.25	5.70	4.4	0.40	0.80
	V480 - V1055	10 ±0.30	8.70	9.25	7.6	0.50	1.60
AS568	201 - 284	3.53 ±0.10	3.05	3.35	2.5	0.25	0.80
	309 - 395	5.33 ±0.12	4.60	5.05	3.9	0.40	0.80
	425 - 475	6.98 ±0.15	6.12	6.55	5.2	0.40	1.60

9. Chamfering Design for Holes and Shafts

Since there is a risk that the edges of cylinders and piston rods may damage the O-ring during installation, please make sure to apply chamfering as given in Table 6-1. Furthermore, in order to prevent pinching of the O-ring caused by titling of the shaft during installation, we recommend that dimension L be set to (G + b) or larger. For piston sealing, absolutely make sure to avoid adding pressure release holes to portions where the O-ring slides over. If the O-ring cannot be prevented from passing over such pressure release holes upon insertion, please add chamfering as shown in Figure 3-1.


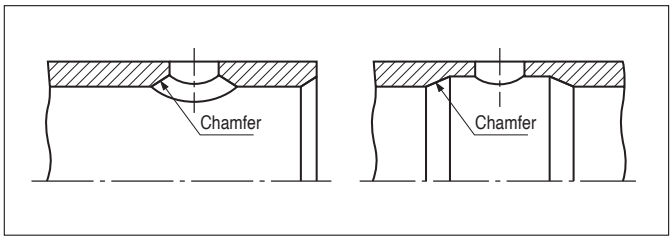


Fig. 3-1

Table 6-1 Rough Guide for Chamfering Dimensions (NOK Standards)

O-Ring Nominal number		a min.	b	
JIS	JASO		For a 15° angle	For a 30° angle
P 3 - P 10	1003 - 1035	0.9	3.4	1.6
P 10A - P 22	2010 - 2071	0.9	3.4	1.6
P 22A - P 50	3022 - 3150	1.1	4.1	1.9
P 48A - P 150		1.3	4.9	2.3
P 150A - P 500		1.5	5.6	2.6
G 25 - G145	3025S - 3145S	1.1	4.1	1.9
G150 - G500		1.3	4.9	2.3
NOK S standard	S 3 - S150	0.9	3.4	1.6
NOK SS standard	SS2 - SS12			

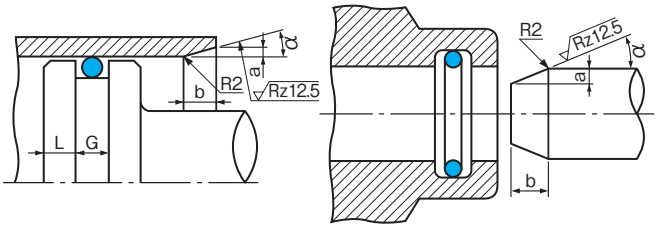

10. Precautions for Special Applications

(1) For Vacuum Flange Sealing

When compared to general hydraulic sealing applications, it is necessary to pay particular attention to the following items when using O-rings for vacuum sealed equipment.

- Since the sealing medium in this case would be a gas, such applications will be more prone to leakage from contact surface gaps when compared to cases where the medium is a liquid. For this reason, it is necessary to pay particularly careful attention to surface roughness for contacting portions.
- When using rubber materials within a vacuum, since the permeation of gas molecules and dispersion of additives cannot be avoided, it will be necessary to select materials with the appropriate characteristics. Please refer to Table 3-1 on pages 8 through 9 when selecting such rubber materials.

(2) Pneumatic Dynamic Sealing

• O-rings used:

NOK recommends the usage of JIS B 2401-1 P Series O-rings (NOK material A305).

• Usage:

1) Please ensure that adequate lubrication is maintained through such as continuous oil lubrication.
2) If such lubrication cannot be performed, make sure that sufficient amounts of grease are applied, and make considerations to prevent grease shortages by adding a grease reservoir structure or by conducting periodic maintenance to account for this.

• Precautions:

1) Ensure that groove dimensions comply with those given in the JIS P Series dimension table.
   For surface finishing, treatment please refer to Table 5-2 on page 14 and Table 6-1.
   If you are using 2 O-rings for piston rod sealing applications, please refer to the dimensions shown in the figure to the right.
2) For the lubricant, please use of NOK KLÜBER “SEALUB S-1” or No. 2 consistency lithium soap-based grease. Generously apply the grease to fill the gaps between the O-rings or between the O-rings and the dust seal.
3) For low-friction dynamic usage, since it will be necessary to change the groove dimensions, please make sure to individually consult with NOK.

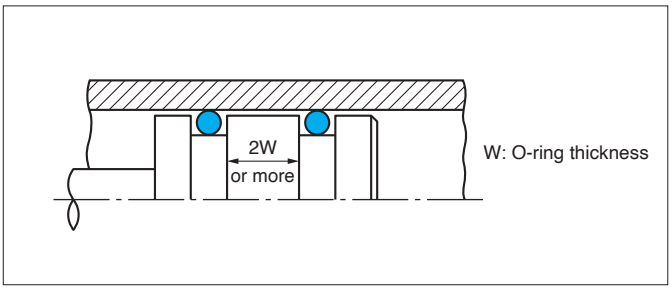


Fig. 4-1

4) NOK also offers pneumatic seals for pneumatic dynamic applications. Please consult with NOK if you are interested.

11. Precautions for O-Ring Installation

(1) Precautions During Assembly

1) For cases where chamfering cannot be added to the rod or where screw threads exist, please use a mounting jig as shown in Fig. 5-1 and make sure to exercise caution to prevent O-ring damage. By wrapping the screw portion with tape, etc., and by passing the O-ring over such portions, it will be possible to insert smoothly.


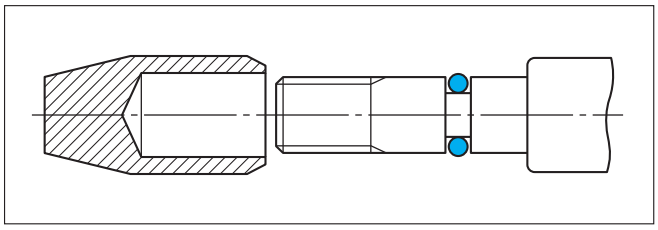


Fig. 5-1

2) Do not twist O-rings when installing them into grooves.

(2) Elongation Ratio of Installed O-Ring

If using a small diameter O-ring for cylindrical sealing applications, please comply with the standard that specifies that the maximum elongation ratio when installed should be less than 40% of rubber material elongation (EB).

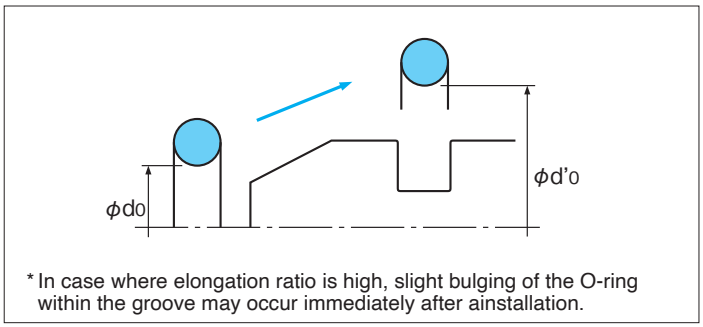

* In case where elongation ratio is high, slight bulging of the O-ring within the groove may occur immediately after ainstallation.

Fig. 5-3

3) Apply the sealing medium to the mating surface and O-rings during installation.
4) Do not reuse O-rings.
5) Do not clean the equipment using cleaning oil or gasoline while O-rings are still installed in grooves. This may cause the rubber material to swell.
6) Even in case where JIS standard O-rings and groove dimensions are used, as bulging on the inside diameter of the groove as shown in Fig. 5-2 may result depending on the different combinations of dimensional tolerances used, please make sure that O-rings are assembled in a manner where pinching does not occur.

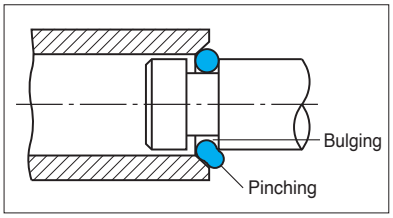


Fig. 5-2

(Example)

① Rubber material: A305
② Standard elongation (actual value): 340%
③ ød0 = 20

(1) As a standard, max. elongation ratio should be:
340% × 0.4 ≒ 140% or less

(2) Calculations for ød'0:

$$\text{Elongation ratio} = \frac{(d'_0 - d_0)}{d_0} = \frac{d'_0}{d_0} - 1$$

$$\frac{d'_0}{d_0} = \text{Elongation ratio} + 1$$

$$\frac{d'_0}{d_0} = 1.4 + 1 = 2.4$$

$$d'_0 = d_0 \times 2.4 = 48$$

Based on this, it can be determined that ød'0 can be elongated up to ø48.

12. Precautions for Storage, and Shelf Life

Please make sure to observe the following O-ring storage precautions.

1) Do not open the packaging unless needed. This can result in the adhesion of foreign substances or debris, or may result in damage.
2) When storing products that have already been opened, be careful to prevent adhesion or foreign substances or debris, and to prevent damage from occurring, and return the product to its packaging and restore it to its original condition as closely as possible.
3) Store products in a low-humidity location where they are not exposed to direct sunlight. Ultraviolet rays and humidity may hasten degradation of the rubber materials and may cause dimensional changes to occur.
4) Do not store products in locations that are close to high-temperature heat sources (boilers, stoves, etc.). Heat may hasten degradation of the rubber materials.
5) Avoid hanging O-rings from nails, wires, or ropes as this may result in deformation.
6) For nitrile rubber (NBR) or styrene-butadiene rubber (SBR) products, storage of such products in a condition where they are exposed to air may result in ozone cracking (refer to page 77).
Do not store products under the following conditions as this may cause such issues to more readily occur.
- Storage near electrical motors that are prone to emitting ozone gases (photocopiers, etc.).
- Keeping products stored in an elongated condition (this includes keeping O-rings stored while they are installed in grooves).

[Reference]

Although there are cases where discoloration or white powder may be observed (refer to blooming on page 75) on the stored product, such conditions will not affect O-ring functionality.

[Shelf life]

The shelf life for O-rings is shown in the table to the right. Please refer to this as a rough estimation on shelf life for products stored in their standard packaging in indoor environments while avoiding exposure to direct sunlight, high temperature, and high humidity.

Product	Material	Shelf life
Individual rubber product	Nitrile rubber (NBR)	10 years
	Silicone rubber (VMQ)	20 years
	Fluororubber (FKM)	20 years
	Acrylic rubber (ACM)	20 years
	Ethylene propylene rubber (EPDM)	20 years
	Hydrogenated nitrile rubber (HNBR)	10 years
	Styrene-butadiene rubber (SBR)	10 years
	Polyurethane rubber (AU)	10 years

13. JIS Dimension Identification Codes

JIS dimension identification codes consist of the following: “product type + material specification + dimensional specification + appearance grade.” (This dimension identification code is indicated on the packaging label.)
Please make sure to specify the NOK part number and JIS dimension identification code when ordering JIS O-rings.

[Example]

OR NBR-70-1 P3-N

- OR: Product type is represented. Type of O-Ring is mentioned above.
- NBR-70-1: Indicates the material specification. The material for the product shown above is: NBR-70-1 (A305)
- P3: Indicates the dimensional specification. The dimensions for the product shown above is: Size 3 of Series P
- N: Indicates the appearance quality specification grade. Please refer to JIS B 2401-3 for more details.

*The NOK part number that corresponds to the JIS dimension identification code is “CO 00000A.”

14. Le-μ’s: Low Friction(μ) Seals



15. Dimension Tables for NOK Standard O-rings

O-RINGS

DIMENSION TABLE

15

JIS P Series — 22
JIS G Series — 30
NOK S Series — 34
NOK SS Series — 36
JIS V Series — 37
AS568 (old ARP568) Series — 38
Old JASO Thickness ø1.9 Series — 46
Old JASO Thickness ø2.4 Series — 48
Old JASO Thickness ø3.1 Series — 50
Old JASO Thickness ø3.5 Series — 52
ISO Equivalent General Industrial Series — 54
NOK WEX Series (O-Ring series for water applications) — 58
NOK BE Series (O-Ring series Biomass) — 59
NOK Iron Rubber P, G Series — 60
JIS Equivalent Backup Rings — 62
Le-μ's NOK SP Coating O-Ring Series — 66
NOK RX Series (O-Ring series for refrigerant) — 67

Le-μ's High-performance brand that contributes to the environment through low-friction technologies

JIS B 2401-1 P Series (Static/Dynamic Applications)


Material								
	JIS	NBR-70-1	NBR-90	NBR-70-2	FKM-70	FKM-90	—	—
	Old JIS*	Class 1A	Class 1B	Class 2	Class 4D	—	Class 4C	—
	JASO	Class 1A	—	Class 2	Class 4D	—	Class 4C	Class 5
	NOK code	A305	A105	A122	F201	F940	S503	E116

*Old JIS: JIS B 2401-2005


■ When ordering, please make sure to specify both the ① JIS dimension identification code and ② NOK part number.
Ex.1) If you wish to purchase a part with an inside diameter of 4.8 and thickness of 1.9 made of material NBR-70-1:
- JIS identification code: **OR NBR-70-1 P5-N**
- NOK part number: **CO 00002 A**

Ex.2) If you wish to purchase a part with an inside diameter of 4.8 and thickness of 1.9 made of material FKM-70:
- JIS identification code: **OR FKM-70 P5-N**
- NOK part number: **CO 00002 S7**


■ The remaining burr (single unit) of E116 is 0.1 in length and 0.15 in thickness or less.

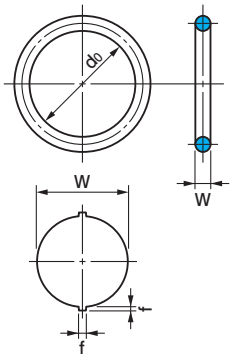

O-Ring Dimensions

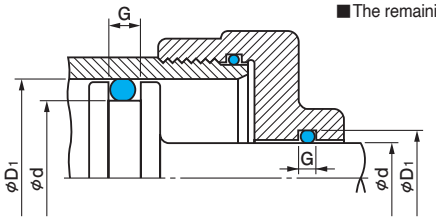

For Dynamic Applications

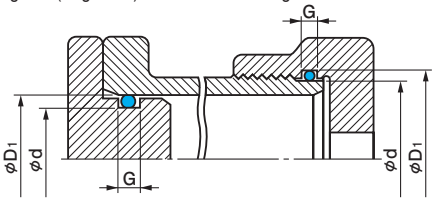

For Cylindrical Surface Static Applications

(Extrusion clearance: Refer to Fig.1-3 on page 15.)


NOK part number								JIS dimension identification code		O-ring dimensions				
Type Dimension code	Material code							Take the material code to the left ← and substitute it for the "□" (except for 4C, 5).	(Reference) Old JIS nominal number	Thickness W	Inside diameter d0	Tolerance of inside diameter 'd0'		
	NBR-70-1 Class 1A A305	NBR-90 Class 1B A105	NBR-70-2 Class 2 A122	FKM-70 Class 4D F201	FKM-90 F940	4C** Class 4C S503	5*** E116					A305 (NBR-70-1) A105 (NBR-90) A122 (NBR-70-2)	F201 (FKM-70) F940 (FKM-90)	Class 4C S503 Class 5 E116
CO 00000				S8	W1		S1	OR□P 3 -N	P 3	1.9±0.08	2.8	±0.14	±0.16	±0.21
CO 00001				R3	V2		H1	OR□P 4 -N	P 4		3.8			
CO 00002				S7	G3		H1	OR□P 5 -N	P 5		4.8	±0.15	±0.18	±0.22
CO 00003				T8	H2		Z1	OR□P 6 -N	P 6		5.8			
CO 00004	A	B	C	T7	Z2	L	O2	OR□P 7 -N	P 7		6.8	±0.16	±0.19	±0.24
CO 00005				U2	P3		R2	OR□P 8 -N	P 8		7.8			
CO 00006				Q5	H1		U1	OR□P 9 -N	P 9		8.8	±0.17	±0.20	±0.25
CO 00007				U8	Q2		O1	OR□P 10 -N	P10		9.8			
CO 00008				X8	Z2		Y1	OR□P 10 A-N	P10A	2.4±0.09	9.8			
CO 00009				X0	X2		X1	OR□P 11 -N	P11		10.8	±0.18	±0.21	±0.27
CO 00010				U2	D0		H1	OR□P 11.2 -N	P11.2		11.0			
CO 00011				V8	G2		U1	OR□P 12 -N	P12		11.8			
CO 00012				Q0	Z1		G1	OR□P 12.5 -N	P12.5		12.3	±0.19	±0.22	±0.28
CO 00013				X0	Y1		G2	OR□P 14 -N	P14		13.8			
CO 00014	A	B	C	U2	G2	L	Y1	OR□P 15 -N	P15		14.8	±0.20	±0.24	±0.30
CO 00015				V8	Y1		Z1	OR□P 16 -N	P16		15.8			
CO 00016				T8	Z2		G1	OR□P 18 -N	P18		17.8	±0.21	±0.25	±0.31
CO 00017				R6	W1		Z1	OR□P 20 -N	P20		19.8	±0.22	±0.26	±0.33
CO 00018				S5	V1		Y1	OR□P 21 -N	P21		20.8	±0.23	±0.27	±0.34
CO 00020				U3	Q1		W1	OR□P 22 -N	P22		21.8			
CO 00019				U3	O1		X1	OR□P 22 A-N	P22A	3.5±0.1	21.7	±0.24	±0.28	±0.36
CO 00021				G0	U0		R0	OR□P 22.4 -N	P22.4		22.1			
CO 00022				U2	Y2		V1	OR□P 24 -N	P24		23.7			
CO 00023				Q0	O1		G1	OR□P 25 -N	P25		24.7	±0.25	±0.30	±0.37
CO 00024				G0	D0		Q0	OR□P 25.5 -N	P25.5		25.2			
CO 00025				N5	G2		G1	OR□P 26 -N	P26		25.7	±0.26	±0.31	±0.39
CO 00026				U2	G1		N1	OR□P 28 -N	P28		27.7	±0.28	±0.33	±0.42
CO 00027				U3	X0		G1	OR□P 29 -N	P29		28.7			
CO 00028				G0	D0		M0	OR□P 29.5 -N	P29.5		29.2	±0.29	±0.34	±0.43
CO 00029				S0	Y0		G1	OR□P 30 -N	P30		29.7			
CO 00030				U3	G1		G2	OR□P 31 -N	P31		30.7	±0.30	±0.36	±0.45
CO 00031				U2	D0		H0	OR□P 31.5 -N	P31.5		31.2	±0.31	±0.37	±0.46
CO 00032				U3	O1		H1	OR□P 32 -N	P32		31.7			
CO 00033	A	B	C	R0	G2	L	N1	OR□P 34 -N	P34		33.7	±0.33	±0.39	±0.49
CO 00034				R0	Y0		E0	OR□P 35 -N	P35		34.7			
CO 00035				U2	D0		Q0	OR□P 35.5 -N	P35.5		35.2	±0.34	±0.40	±0.51
CO 00036				U3	E0		X0	OR□P 36 -N	P36		35.7			
CO 00037				Q0	R1		U1	OR□P 38 -N	P38		37.7			
CO 00038				U2	D0		X0	OR□P 39 -N	P39		38.7	±0.37	±0.44	±0.55
CO 00039				W0	H1		P1	OR□P 40 -N	P40		39.7			
CO 00040				U3	E0		P0	OR□P 41 -N	P41		40.7	±0.38	±0.45	±0.57
CO 00041				U2	H0		P1	OR□P 42 -N	P42		41.7	±0.39	±0.46	±0.58
CO 00042				U2	W0		G1	OR□P 44 -N	P44		43.7	±0.41	±0.49	±0.61
CO 00043				P3	Q1		S1	OR□P 45 -N	P45		44.7			
CO 00044				U3	W0		G2	OR□P 46 -N	P46		45.7	±0.42	±0.50	±0.63
CO 00046				X0	P1		H1	OR□P 48 -N	P48		47.7	±0.44	±0.52	±0.66


**Dimension identification codes for 4C are given as follows: "4C□". Please take the Old JIS nominal number and substitute if for the "□".
***Dimension identification codes for 5 are given as follows: "5□". Please take the Old JIS nominal number and substitute if for the "□".

No Backup Rings

Backup Ring on One Side
(Only for dynamic applications and cylindrical surface static applications)

Backup Rings on Both Sides
(Only for dynamic applications and cylindrical surface static applications)

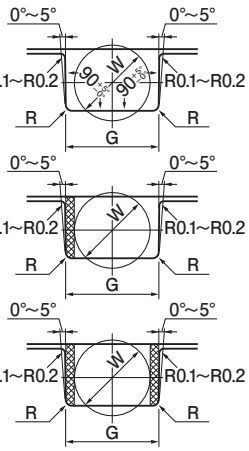

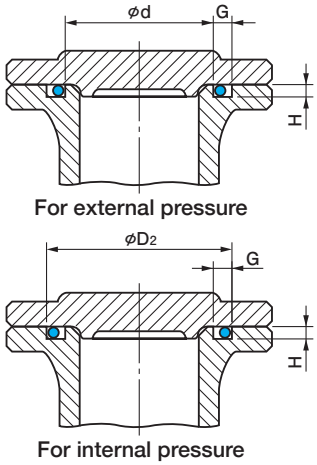

(Note) Chamfering is indicated in accordance with NOK recommended values.

■JIS dimension identification codes represent "product type + material specification + dimensional specification + appearance grade."

■We also offer parts with the same dimensions as the Old JASO standards in addition to the materials given for the following lineups.
Please refer to pages 46 through 53 for more details.
- Class 3 (SBR materials)
- Class 4E (acrylic materials)
- Class 5 (EPDM materials)
- Material H (H-NBR materials)

Groove Shapes For Flat Face Static Applications

(Unit: mm)

Composite burr dimension f	Groove dimensions (based on JIS standard values)										
	Dimension d		Dimensions D_1, D_2			Dimension G (tolerance $^{+0.25}_{0}$)			Dimension H	Dimension R	Max. center misalignment (TIR) of D and d for dynamic or cylindrical surface static applications
	d	Tolerance	D_1	D_2	Tolerance	No backup rings	Backup ring on one side	Backup rings on both sides	H±0.05	Max. value	
0.10 or less	3 4 5 6 7 8 9 10	0 −0.05	6 7 8 9 10 11 12 13	6.2 7.2 8.2 9.2 10.2 11.2 12.2 13.2	+0.05 0	2.5	3.9	5.4	1.4	0.4	0.05
0.12 or less	10 11 11.2 12 12.5 14 15 16 18 20 21 22	0 −0.06	14 15 15.2 16 16.5 18 19 20 22 24 25 26		+0.06 0	3.2	4.4	6.0	1.8	0.4	0.05
0.14 or less	22 22.4 24 25 25.5 26 28 29 29.5 30 31 31.5 32 34 35 35.5 36 38 39 40 41 42 44 45 46 48	0 −0.08	28 28.4 30 31 31.5 32 34 35 35.5 36 37 37.5 38 40 41 41.5 42 44 45 46 47 48 50 51 52 54		+0.08 0	4.7	6.0	7.8	2.7	0.8	0.08

Ex. 3) For parts with an inside diameter of 2.8 and a thickness of 1.9: 4C P3
Ex. 4) For parts with an inside diameter of 2.8 and a thickness of 1.9: 5 P3

JIS B 2401-1 P Series (Static/Dynamic Applications)


Material	JIS	NBR-70-1	NBR-90	NBR-70-2	FKM-70	FKM-90	—	—
	Old JIS*	Class 1A	Class 1B	Class 2	Class 4D	—	Class 4C	—
	JASO	Class 1A	—	Class 2	Class 4D	—	Class 4C	Class 5
	NOK code	A305	A105	A122	F201	F940	S503	E116

*Old JIS: JIS B 2401-2005


■ When ordering, please make sure to specify both the ① JIS dimension identification code and ② NOK part number.
Ex.1) If you wish to purchase a part with an inside diameter of 48.7 and thickness of 3.5 made of material NBR-70-1:
- JIS identification code: **OR NBR-70-1 P49-N**
- NOK part number: **CO 00047 A**

Ex.2) If you wish to purchase a part with an inside diameter of 48.7 and thickness of 3.5 made of material FKM-70:
- JIS identification code: **OR FKM-70 P49-N**
- NOK part number: **CO 00047 O0**


■ The remaining burr (single unit) of E116 is 0.1 in length and 0.15 in thickness or less.

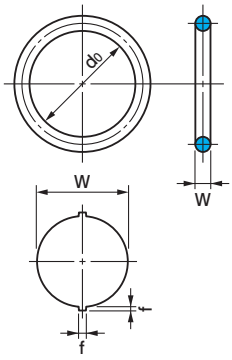

O-Ring Dimensions

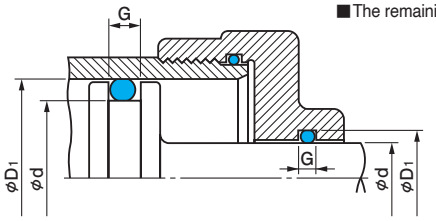

For Dynamic Applications

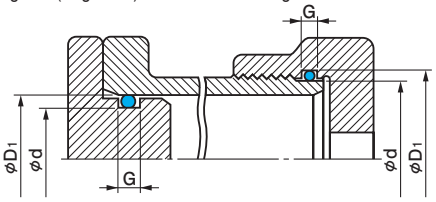

For Cylindrical Surface Static Applications

(Extrusion clearance: Refer to Fig.1-3 on page 15.)


NOK part number								JIS dimension identification code		O-ring dimensions				
Type Dimension code	Material code							Take the material code to the left ← and substitute it for the "□" (except for 4C, 5).	(Reference) Old JIS nominal number	Thickness W	Inside diameter d0	Tolerance of inside diameter 'd0'		
	NBR-70-1 Class 1A A305	NBR-90 Class 1B A105	NBR-70-2 Class 2 A122	FKM-70 Class 4D F201	FKM-90 F940	4C** Class 4C S503	5*** E116					A305 (NBR-70-1) A105 (NBR-90) A122 (NBR-70-2)	F201 (FKM-70) F940 (FKM-90)	Class 4C S503 Class 5 E116
CO 00047	A	B	C	O0	W0	L	X0	OR□P 49 -N	P49	3.5±0.1	48.7	±0.45	±0.54	±0.67
CO 00049				Q5	G1		T1	OR□P 50 -N	P50		49.7			
CO 00045				G0	D0			OR□P 48A -N	P48A		47.6	±0.44	±0.52	±0.66
CO 00048				U3	D0			OR□P 50A -N	P50A		49.6	±0.45	±0.54	±0.67
CO 00050				U3	D0			OR□P 52 -N	P52		51.6	±0.47	±0.56	±0.70
CO 00051				G0	E0			OR□P 53 -N	P53		52.6	±0.48	±0.57	±0.72
CO 00052				U3	Y0			OR□P 55 -N	P55		54.6	±0.49	±0.58	±0.73
CO 00053				U3	D0			OR□P 56 -N	P56		55.6	±0.50	±0.60	±0.75
CO 00054				G0	D0			OR□P 58 -N	P58		57.6	±0.52	±0.62	±0.78
CO 00055				U3	D0			OR□P 60 -N	P60		59.6	±0.53	±0.63	±0.79
CO 00056				U3	X0			OR□P 62 -N	P62		61.6	±0.55	±0.66	±0.82
CO 00057				H0	D0			OR□P 63 -N	P63		62.6	±0.56	±0.67	±0.84
CO 00058				H0	Z1			OR□P 65 -N	P65		64.6	±0.57	±0.68	±0.85
CO 00059				U3	D0			OR□P 67 -N	P67		66.6	±0.59	±0.70	±0.88
CO 00060				O0	Y0			OR□P 70 -N	P70		69.6	±0.61	±0.73	±0.91
CO 00061				U3	D0			OR□P 71 -N	P71		70.6	±0.62	±0.74	±0.93
CO 00062				U3	R1			OR□P 75 -N	P75		74.6	±0.65	±0.78	±0.97
CO 00063				Q0	X0			OR□P 80 -N	P80		79.6	±0.69	±0.82	±1.03
CO 00064	A	B	C	G0	Z0	L	—	OR□P 85 -N	P85	5.7±0.13	84.6	±0.73	±0.87	±1.09
CO 00065				U3	X1			OR□P 90 -N	P90		89.6	±0.77	±0.92	±1.15
CO 00066				U3	X0			OR□P 95 -N	P95		94.6	±0.81	±0.97	±1.21
CO 00067				T0	P1			OR□P100 -N	P100		99.6	±0.84	±1.00	±1.26
CO 00068				U3	D0			OR□P102 -N	P102		101.6	±0.85	±1.02	±1.27
CO 00069				U3	Z0			OR□P105 -N	P105		104.6	±0.87	±1.04	±1.30
CO 00070				U3	Z0			OR□P110 -N	P110		109.6	±0.91	±1.09	±1.36
CO 00071				G0	Q0			OR□P112 -N	P112		111.6	±0.92	±1.10	±1.38
CO 00072				U3	D0			OR□P115 -N	P115		114.6	±0.94	±1.12	±1.41
CO 00073				U3	V1			OR□P120 -N	P120		119.6	±0.98	±1.17	±1.47
CO 00074				U3	Y0			OR□P125 -N	P125		124.6	±1.01	±1.21	±1.51
CO 00075				T0	Z0			OR□P130 -N	P130		129.6	±1.05	±1.26	±1.57
CO 00076				U3	D0			OR□P132 -N	P132		131.6	±1.06	±1.27	±1.59
CO 00077				U3	Y0			OR□P135 -N	P135		134.6	±1.09	±1.30	±1.63
CO 00078				U3	H3			OR□P140 -N	P140		139.6	±1.12	±1.34	±1.68
CO 00079				U3	Y0			OR□P145 -N	P145		144.6	±1.16	±1.39	±1.74
CO 00081				S0	D0			OR□P150 -N	P150		149.6	±1.19	±1.42	±1.78
CO 00080				U3				OR□P150A -N	P150A		149.5	±1.19	±1.42	±1.78
CO 00082				U3				OR□P155 -N	P155		154.5	±1.23	±1.47	±1.84
CO 00083				G0				OR□P160 -N	P160		159.5	±1.26	±1.51	±1.89
CO 00084				G0				OR□P165 -N	P165		164.5	±1.30	±1.56	±1.95
CO 00085				U3				OR□P170 -N	P170		169.5	±1.33	±1.59	±1.99
CO 00086	A	B	C	G0	—	L	—	OR□P175 -N	P175	8.4±0.15	174.5	±1.37	±1.64	±2.05
CO 00087				P0				OR□P180 -N	P180		179.5	±1.40	±1.68	±2.10
CO 00088				U3				OR□P185 -N	P185		184.5	±1.44	±1.72	±2.16
CO 00089				U3				OR□P190 -N	P190		189.5	±1.48	±1.77	±2.22
CO 00090				G0				OR□P195 -N	P195		194.5	±1.51	±1.81	±2.26
CO 00091				G0				OR□P200 -N	P200		199.5	±1.55	±1.86	±2.32


**Dimension identification codes for 4C are given as follows: "4C□". Please take the Old JIS nominal number and substitute if for the "□".
***Dimension identification codes for 5 are given as follows: "5□". Please take the Old JIS nominal number and substitute if for the "□".

No Backup Rings


Backup Ring on One Side
(Only for dynamic applications and cylindrical surface static applications)

Backup Rings on Both Sides
(Only for dynamic applications and cylindrical surface static applications)

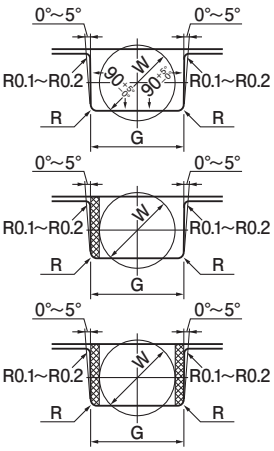



For external pressure



For internal pressure

(Note) Chamfering is indicated in accordance with NOK recommended values.

■JIS dimension identification codes represent "product type + material specification + dimensional specification + appearance grade."

■We also offer parts with the same dimensions as the Old JASO standards in addition to the materials given for the following lineups.
Please refer to pages 46 through 53 for more details.
- Class 3 (SBR materials)
- Class 4E (acrylic materials)
- Class 5 (EPDM materials)
- Material H (H-NBR materials)

Groove Shapes For Flat Face Static Applications

(Unit: mm)

Composite burr dimension f	Groove dimensions (based on JIS standard values)									
	Dimension d		Dimensions D_1, D_2		Dimension G (tolerance $^{+0.25}_{0}$)			Dimension H	Dimension R	Max. center misalignment (TIR) of D and d for dynamic or cylindrical surface static applications
	d	Tolerance	D_1, D_2	Tolerance	No backup rings	Backup ring on one side	Backup rings on both sides	H±0.05	Max. value	
0.14 or less	49 50	0 −0.08	55 56	+0.08 0	4.7	6.0	7.8	2.7	0.8	0.08
0.16 or less	48 50 52 53 55 56 58 60 62 63 65 67 70 71 75 80 85 90 95 100 102 105 110 112 115 120 125 130 132 135 140 145 150	0 −0.10	58 60 62 63 65 66 68 70 72 73 75 77 80 81 85 90 95 100 105 110 112 115 120 122 125 130 135 140 142 145 150 155 160	+0.10 0	7.5	9.0	11.5	4.6	0.8	0.10
0.18 or less	150 155 160 165 170 175 180 185 190 195 200	0 −0.10	165 170 175 180 185 190 195 200 205 210 215	+0.10 0	11.0	13.0	17.0	6.9	1.2	0.12

Ex. 3) For parts with an inside diameter of 48.7 and a thickness of 3.5: 4C P49
Ex. 4) For parts with an inside diameter of 48.7 and a thickness of 3.5: 5P49


JIS B 2401-1 P Series (Static/Dynamic Applications)

Material	JIS	NBR-70-1	NBR-90	NBR-70-2	FKM-70	FKM-90	—	—
	Old JIS*	Class 1A	Class 1B	Class 2	Class 4D	—	Class 4C	—
	JASO	Class 1A	—	Class 2	Class 4D	—	Class 4C	Class 5
	NOK code	A305	A105	A122	F201	F940	S503	E116


*Old JIS: JIS B 2401-2005

■ When ordering, please make sure to specify both the ① JIS dimension identification code and ② NOK part number.
Ex.1) If you wish to purchase a part with an inside diameter of 204.5 and thickness of 8.4 made of material NBR-70-1:
- JIS identification code: **OR NBR-70-1 P205-N**
- NOK part number: **CO 00092 A**


Ex.2) If you wish to purchase a part with an inside diameter of 204.5 and thickness of 8.4 made of material FKM-70:
- JIS identification code: **OR FKM-70 P205-N**
- NOK part number: **CO 00092 G0**

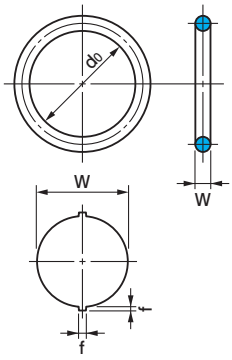

O-Ring Dimensions

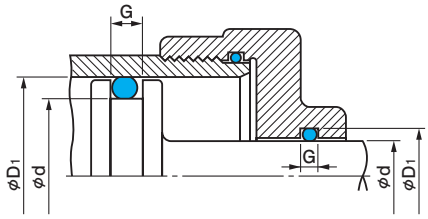

For Dynamic Applications

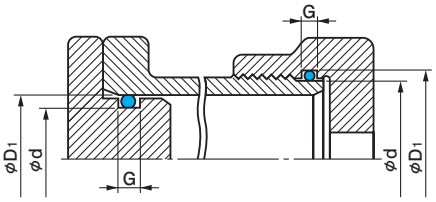

For Cylindrical Surface Static Applications

(Extrusion clearance: Refer to Fig.1-3 on page 15.)

NOK part number								JIS dimension identification code		O-ring dimensions				
Type Dimension code	Material code							Take the material code to the left ← and substitute it for the "□" (except for 4C, 5).	(Reference) Old JIS nominal number	Thickness W	Inside diameter d0	Tolerance of inside diameter 'd0'		
	NBR-70-1 Class 1A A305	NBR-90 Class 1B A105	NBR-70-2 Class 2 A122	FKM-70 Class 4D F201	FKM-90 F940	4C** Class 4C S503	5*** E116					A305 (NBR-70-1) A105 (NBR-90) A122 (NBR-70-2)	F201 (FKM-70) F940 (FKM-90)	Class 4C S503 Class 5 E116
CO 00092				G0				OR□P205-N	P205		204.5	±1.58	±1.89	±2.37
CO 00093				O0				OR□P209-N	P209		208.5	±1.61	±1.93	±2.41
CO 00094				H0				OR□P210-N	P210		209.5	±1.62	±1.94	±2.43
CO 00095				G0				OR□P215-N	P215		214.5	±1.65	±1.98	±2.47
CO 00096				U3				OR□P220-N	P220		219.5	±1.68	±2.01	±2.52
CO 00097				G0				OR□P225-N	P225		224.5	±1.71	±2.05	±2.56
CO 00098				U3				OR□P230-N	P230		229.5	±1.75	±2.10	±2.62
CO 00099				U3				OR□P235-N	P235		234.5	±1.78	±2.13	±2.67
CO 00100				H0				OR□P240-N	P240		239.5	±1.81	±2.17	±2.71
CO 00101				U3				OR□P245-N	P245		244.5	±1.84	±2.20	±2.76
CO 00102		B	C	G0		L		OR□P250-N	P250		249.5	±1.88	±2.25	±2.82
CO 00103				G0				OR□P255-N	P255		254.5	±1.91	±2.29	±2.86
CO 00104				U3				OR□P260-N	P260		259.5	±1.94	±2.32	±2.91
CO 00105				G0				OR□P265-N	P265		264.5	±1.97	±2.36	±2.95
CO 00106				G0				OR□P270-N	P270		269.5	±2.01	±2.41	±3.01
CO 00107				G0				OR□P275-N	P275		274.5	±2.04	±2.44	±3.06
CO 00108				G0				OR□P280-N	P280		279.5	±2.07	±2.48	±3.10
CO 00109				N0				OR□P285-N	P285		284.5	±2.10	±2.52	±3.15
CO 00110				N0				OR□P290-N	P290		289.5	±2.14	±2.56	±3.21
CO 00111				G0				OR□P295-N	P295		294.5	±2.17	±2.60	±3.25
CO 00112				N0				OR□P300-N	P300		299.5	±2.20	±2.64	±3.30
CO 02147*		—	—	G0		—		OR□P305-N*	P305*		304.5	±2.24	±2.69	—
CO 08835*								OR□P310-N*	P310*		309.5	±2.27	±2.72	—
CO 00113	A	B	C	O0	—	L	—	OR□P315-N	P315	8.4±0.15	314.5	±2.30	±2.76	±3.45
CO 00114				G0				OR□P320-N	P320		319.5	±2.33	±2.79	±3.49
CO 08836*		—	—	G0		—		OR□P325-N*	P325*		324.5	±2.36	±2.83	—
CO 07645*								OR□P330-N*	P330*		329.5	±2.39	±2.87	—
CO 00115		B	C	G0		L		OR□P335-N	P335		334.5	±2.42	±2.90	±3.63
CO 00116				N0				OR□P340-N	P340		339.5	±2.45	±2.94	±3.67
CO 08837*		—	—	G0		—		OR□P345-N*	P345*		344.5	±2.48	±2.98	—
CO 06615*								OR□P350-N*	P350*		349.5	±2.51	±3.01	—
CO 00117		B	C	G0		L		OR□P355-N	P355		354.5	±2.54	±3.04	±3.81
CO 00118								OR□P360-N	P360		359.5	±2.57	±3.08	±3.85
CO 06630*		—	—	G0		—		OR□P365-N*	P365*		364.5	±2.60	±3.12	—
CO 08838*								OR□P370-N*	P370*		369.5	±2.63	±3.16	—
CO 00119		B	C	G0		L		OR□P375-N	P375		374.5	±2.67	±3.20	±4.00
CO 02274*		—	—	G0		—		OR□P380-N*	P380*		379.5	±2.70	±3.24	—
CO 00120		B	C	G0		L		OR□P385-N	P385		384.5	±2.73	±3.27	±4.09
CO 06650*		—	—	G0		—		OR□P390-N*	P390*		389.5	±2.77	±3.32	—
CO 08839*								OR□P395-N*	P395*		394.5	±2.79	±3.35	—
CO 00121		B	C	G0		L		OR□P400-N	P400		399.5	±2.82	±3.38	±4.23
CO 02311*								OR□P405-N*	P405*		404.5			
CO 06663*								OR□P410-N*	P410*		409.5			
CO 02337*								OR□P415-N*	P415*		414.5			
CO 08840*		—	—	G0		—		OR□P420-N*	P420*		419.5	±3.00	±3.60	—
CO 02359*								OR□P425-N*	P425*		424.5			
CO 02371*								OR□P430-N*	P430*		429.5			


*For these code numbers, only rubber materials A305 and F201 are available.
**Dimension identification codes for 4C are given as follows: "4C□". Please take the Old JIS nominal number and substitute if for the "□".


P Series

No Backup Rings

Backup Ring on One Side
(Only for dynamic applications and cylindrical surface static applications)

Backup Rings on Both Sides
(Only for dynamic applications and cylindrical surface static applications)

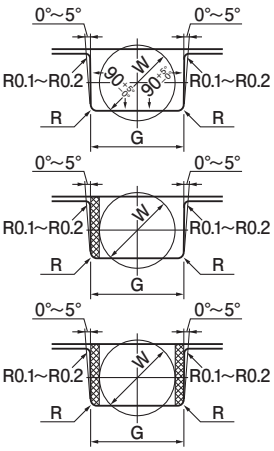

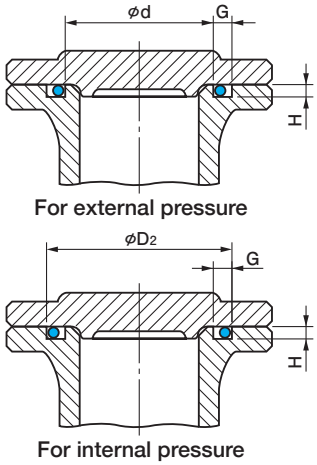

(Note) Chamfering is indicated in accordance with NOK recommended values.

■JIS dimension identification codes represent "product type + material specification + dimensional specification + appearance grade."

■We also offer parts with the same dimensions as the Old JASO standards in addition to the materials given for the following lineups.
Please refer to pages 46 through 53 for more details.
- Class 3 (SBR materials)
- Class 4E (acrylic materials)
- Class 5 (EPDM materials)
- Material H (H-NBR materials)

Groove Shapes For Flat Face Static Applications

(Unit: mm)

Composite burr dimension f	Groove dimensions (based on JIS standard values)									
	Dimension d		Dimensions D_1, D_2		Dimension G (tolerance $^{+0.25}_{0}$)			Dimension H	Dimension R	Max. center misalignment (TIR) of D and d for dynamic or cylindrical surface static applications
	d	Tolerance	D_1, D_2	Tolerance	No backup rings	Backup ring on one side	Backup rings on both sides	H±0.05	Max. value	
0.18 or less	205 209 210 215 220 225 230 235 240 245 250 255 260 265 270 275 280 285 290 295 300 305 310 315 320 325 330 335 340 345 350 355 360 365 370 375 380 385 390 395	0 −0.10	220 224 225 230 235 240 245 250 255 260 265 270 275 280 285 290 295 300 305 310 315 320 325 330 335 340 345 350 355 360 365 370 375 380 385 390 395 400 405 410	+0.10 0	11.0	13.0	17.0	6.9	1.2	0.12
0.18 or less	400 405 410 415 420 425 430		415 420 425 430 435 440 445							

P Series

Ex. 3) For parts with an inside diameter of 204.5 and a thickness of 8.4: 4C P205


JIS B 2401-1 P Series (Static/Dynamic Applications)

Material								
	JIS	NBR-70-1	NBR-90	NBR-70-2	FKM-70	FKM-90	—	—
	Old JIS*	Class 1A	Class 1B	Class 2	Class 4D	—	Class 4C	—
	JASO	Class 1A	—	Class 2	Class 4D	—	Class 4C	Class 5
	NOK code	A305	A105	A122	F201	F940	S503	E116


*Old JIS: JIS B 2401-2005

■ When ordering, please make sure to specify both the ① JIS dimension identification code and ② NOK part number.
Ex.1) If you wish to purchase a part with an inside diameter of 434.5 and thickness of 8.4 made of material NBR-70-1:
- JIS identification code: **OR NBR-70-1 P435-N**
- NOK part number: **CO 02383 A**


Ex.2) If you wish to purchase a part with an inside diameter of 434.5 and thickness of 8.4 made of material FKM-70:
- JIS identification code: **OR FKM-70 P435-N**
- NOK part number: **CO 02383 G0**

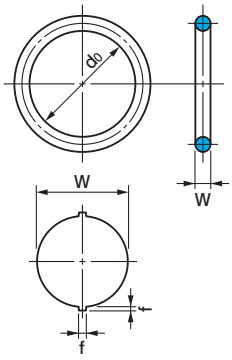

O-Ring Dimensions

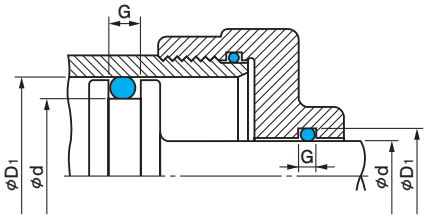

For Dynamic Applications

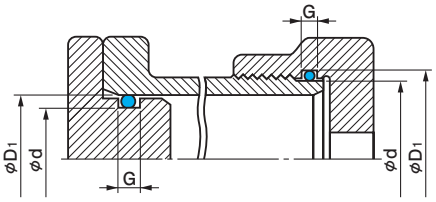

For Cylindrical Surface Static Applications

(Extrusion clearance: Refer to Fig.1-3 on page 15.)

NOK part number								JIS dimension identification code		O-ring dimensions				
Type Dimension code	Material code							Take the material code to the left ← and substitute it for the "□" (except for 4C, 5).	(Reference) Old JIS nominal number	Thickness W	Inside diameter d0	Tolerance of inside diameter 'd0'		
	NBR-70-1 Class 1A A305	NBR-90 Class 1B A105	NBR-70-2 Class 2 A122	FKM-70 Class 4D F201	FKM-90 F940	4C** Class 4C S503	5*** E116					A305 (NBR-70-1) A105 (NBR-90) A122 (NBR-70-2)	F201 (FKM-70) F940 (FKM-90)	Class 4C S503 Class 5 E116
CO 02383*	A	—	—	G0	—	—	—	OR□P435-N*	P435*	8.4±0.15	434.5	±3.00	±3.60	—
CO 08841*				G0				OR□P440-N*	P440*		439.5			
CO 06681*				G0				OR□P445-N*	P445*		444.5			
CO 08842*				G0				OR□P450-N*	P450*		449.5			
CO 02433*				G0				OR□P455-N*	P455*		454.5	±3.30	±4.00	—
CO 08843*				G0				OR□P460-N*	P460*		459.5			
CO 02453*				H0				OR□P465-N*	P465*		464.5			
CO 08844*				G0				OR□P470-N*	P470*		469.5			
CO 08845*				G0				OR□P475-N*	P475*		474.5			
CO 06734*				G0				OR□P480-N*	P480*		479.5			
CO 09165*				G0				OR□P485-N*	P485*		484.5			
DO 09015*				G0				OR□P490-N*	P490*		489.5			
DO 09016*				G0				OR□P495-N*	P495*		494.5			
CO 09057*				G0				OR□P500-N*	P500*		499.5			


*For these code numbers, only rubber materials A305 and F201 are available.


P Series

No Backup Rings


Backup Ring on One Side
(Only for dynamic applications and cylindrical surface static applications)

Backup Rings on Both Sides
(Only for dynamic applications and cylindrical surface static applications)

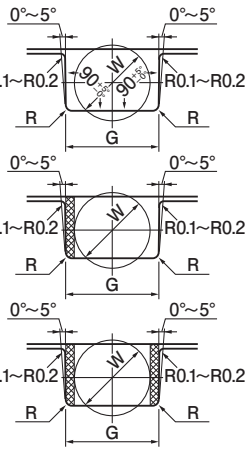



For external pressure



For internal pressure

(Note) Chamfering is indicated in accordance with NOK recommended values.

■JIS dimension identification codes represent "product type + material specification + dimensional specification + appearance grade."

■We also offer parts with the same dimensions as the Old JASO standards in addition to the materials given for the following lineups.
Please refer to pages 46 through 53 for more details.
- Class 3 (SBR materials)
- Class 4E (acrylic materials)
- Class 5 (EPDM materials)
- Material H (H-NBR materials)

Groove Shapes For Flat Face Static Applications

(Unit: mm)

	Groove dimensions (based on JIS standard values)									
	Composite burr dimension f	Dimension d		Dimensions D1, D2		Dimension G (tolerance $^{+0.25}_{0}$)			Dimension H	Dimension R	Max. center misalignment (TIR) of D and d for dynamic or cylindrical surface static applications
		d	Tolerance	D1, D2	Tolerance	No backup rings	Backup ring on one side	Backup rings on both sides	H±0.05	Max. value	
	0.18 or less	435 440 445 450	0 −0.10	450 455 460 465	+0.10 0	11.0	13.0	17.0	6.9	1.2	0.12
	0.18 or less	455 460 465 470 475 480 485 490 495 500		470 475 480 485 490 495 500 505 510 515							

P Series

JIS B 2401-1 G Series (Static Applications)


Material	JIS	NBR-70-1	NBR-90	NBR-70-2	FKM-70	FKM-90	—	—
	Old JIS*	Class 1A	Class 1B	Class 2	Class 4D	—	Class 4C	—
	JASO	Class 1A	—	Class 2	Class 4D	—	Class 4C	Class 5
	NOK code	A305	A105	A122	F201	F940	S503	E116

*Old JIS: JIS B 2401-2005


■ When ordering, please make sure to specify both the ① JIS dimension identification code and ② NOK part number.
Ex.1) If you wish to purchase a part with an inside diameter of 24.4 and thickness of 3.1 made of material NBR-70-1:
- JIS identification code: **OR NBR-70-1 G25-N**
- NOK part number: **CO 00200 A**

Ex.2) If you wish to purchase a part with an inside diameter of 24.4 and thickness of 3.1 made of material FKM-70:
- JIS identification code: **OR FKM-70 G25-N**
- NOK part number: **CO 00200 R6**

■ The remaining burr (single unit) of E116 is 0.1 in length and 0.15 in thickness or less.

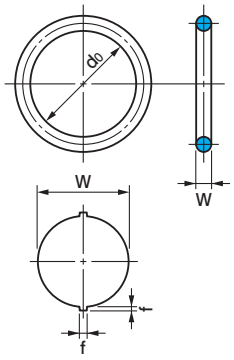

O-Ring Dimensions

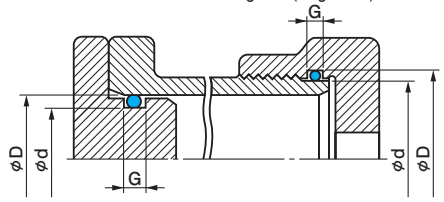

(Extrusion clearance: Refer to Fig. 1-3 on page 15.)

For Cylindrical Surface Static Applications


NOK part number: Type Dimension code	Material code: NBR-70-1 Class 1A A305	NBR-90 Class 1B A105	NBR-70-2 Class 2 A122	FKM-70 Class 4D F201	FKM-90 F940	4C** Class 4C S503	5*** E116	JIS dimension identification code: Take the material code to the left ← and substitute it for the "□" (except for 4C, 5).	(Reference) Old JIS nominal number	O-ring dimensions: Thickness W	Inside diameter d0	Tolerance of inside diameter 'd0': A305 (NBR-70-1) A105 (NBR-90) A122 (NBR-70-2)	F201 (FKM-70) F940 (FKM-90)	Class 4C S503 Class 5 E116
CO 00200	A	B	C	R6	N1	L	R1	OR□G 25 -N	G 25	3.1±0.1	24.4	±0.25	±0.30	± 0.37
CO 00201				U0	V2		S1	OR□G 30 -N	G 30		29.4	±0.29	±0.34	± 0.43
CO 00202				U2	V1		P1	OR□G 35 -N	G 35		34.4	±0.33	±0.39	± 0.49
CO 00203				U2	Z2		V1	OR□G 40 -N	G 40		39.4	±0.37	±0.44	± 0.55
CO 00204				U2	S1		Z0	OR□G 45 -N	G 45		44.4	±0.41	±0.49	± 0.61
CO 00205				U0	Z1		Y1	OR□G 50 -N	G 50		49.4	±0.45	±0.54	± 0.67
CO 00206				R8	V1		X1	OR□G 55 -N	G 55		54.4	±0.49	±0.58	± 0.73
CO 00207				U0	T1		X1	OR□G 60 -N	G 60		59.4	±0.53	±0.63	± 0.79
CO 00208				Q6	H1		Z1	OR□G 65 -N	G 65		64.4	±0.57	±0.68	± 0.85
CO 00209				U2	Z0		S1	OR□G 70 -N	G 70		69.4	±0.61	±0.73	± 0.91
CO 00210				U2	W1		P2	OR□G 75 -N	G 75		74.4	±0.65	±0.78	± 0.97
CO 00211				U2	Z0		W1	OR□G 80 -N	G 80		79.4	±0.69	±0.82	± 1.03
CO 00212				Q1	T1		Z1	OR□G 85 -N	G 85		84.4	±0.73	±0.87	± 1.09
CO 00213				U2	Y0		G1	OR□G 90 -N	G 90		89.4	±0.77	±0.92	± 1.15
CO 00214				U2	Y1		G1	OR□G 95 -N	G 95		94.4	±0.81	±0.97	± 1.21
CO 00215				U2	Z0		S1	OR□G100 -N	G100		99.4	±0.85	±1.02	±1.27
CO 00216				U2	G1		Q1	OR□G105 -N	G105		104.4	±0.87	±1.04	±1.30
CO 00217				U2	X1		H1	OR□G110 -N	G110		109.4	±0.91	±1.09	±1.36
CO 00218				U2	X1		W1	OR□G115 -N	G115		114.4	±0.94	±1.12	±1.41
CO 00219				R0	Z0		T1	OR□G120 -N	G120		119.4	±0.98	±1.17	±1.47
CO 00220				U2	Z0		X0	OR□G125 -N	G125		124.4	±1.01	±1.21	±1.51
CO 00221				U2	H1		N1	OR□G130 -N	G130		129.4	±1.05	±1.26	±1.57
CO 00222				U2	G1		X1	OR□G135 -N	G135		134.4	±1.08	±1.29	±1.62
CO 00223				X0	Z0		X1	OR□G140 -N	G140		139.4	±1.12	±1.34	±1.68
CO 00224				U2	G2		H1	OR□G145 -N	G145		144.4	±1.16	±1.39	±1.74
CO 04829*				G0				OR□G3150 -N	G3150★		149.4	±1.19	±1.42	
CO 04502*				G0				OR□G3155 -N	G3155★		154.4	±1.23	±1.47	
CO 06414*				H0				OR□G3160 -N	G3160★		159.4	±1.26	±1.51	
CO 01853*				G0				OR□G3165 -N	G3165★		164.4	±1.30	±1.56	
CO 01868*				N0				OR□G3170 -N	G3170★		169.4	±1.33	±1.59	
CO 03244*		—	—	C0	—	—		OR□G3175 -N	G3175★		174.4	±1.37	±1.64	—
CO 06439*				C0				OR□G3180 -N	G3180★		179.4	±1.40	±1.68	
CO 06446*				G0				OR□G3185 -N	G3185★		184.4	±1.44	±1.72	
CO 05996*				C0				OR□G3190 -N	G3190★		189.4	±1.47	±1.76	
CO 21253*				C0				OR□G3195 -N	G3195★		194.4	±1.51	±1.81	
CO 04828*				G0				OR□G3200 -N	G3200★		199.4	±1.55	±1.86	
CO 00225		B	C	U3	H1	L	—	OR□G150 -N	G150	5.7±0.13	149.3	±1.19	±1.42	±1.78
CO 00226				U3	H0			OR□G155 -N	G155		154.3	±1.23	±1.47	±1.84
CO 00227				U3	G1			OR□G160 -N	G160		159.3	±1.26	±1.51	±1.89
CO 00228				U3	Z0			OR□G165 -N	G165		164.3	±1.30	±1.56	±1.95
CO 00229				U3	W0			OR□G170 -N	G170		169.3	±1.33	±1.59	±1.99
CO 00230				U3	V0			OR□G175 -N	G175		174.3	±1.37	±1.64	±2.05
CO 00231				W0	W1			OR□G180 -N	G180		179.3	±1.40	±1.68	±2.10
CO 00232				U3	W0			OR□G185 -N	G185		184.3	±1.44	±1.72	±2.16
CO 00233				U3	V0			OR□G190 -N	G190		189.3	±1.47	±1.76	±2.20
CO 00234				U3	T0			OR□G195 -N	G195		194.3	±1.51	±1.81	±2.26
CO 00235				U3	V0			OR□G200 -N	G200		199.3	±1.55	±1.86	±2.32
CO 01968*		—	—	H0	—	—		OR□G205 -N*	G205*		204.3	±1.58	±1.90	—
CO 00236		B	C	V0	X1	L		OR□G210 -N	G210		209.3	±1.61	±1.93	±2.41
CO 03303*		—	—	O0	—	—		OR□G215 -N*	G215*		214.3	±1.65	±1.98	—


*For these code numbers, only rubber materials A305 and F201 are available.
**Dimension identification codes for 4C are given as follows: "4C□". Please take the Old JIS nominal number and substitute if for the "□".
***Dimension identification codes for 5 are given as follows: "5□". Please take the Old JIS nominal number and substitute if for the "□".
★: The old JIS numbers G3150 to G3200 are NOK original numbers.

No Backup Rings


Backup Ring on One Side
(Only for cylindrical surface static applications)

Backup Rings on Both Sides
(Only for cylindrical surface static applications)

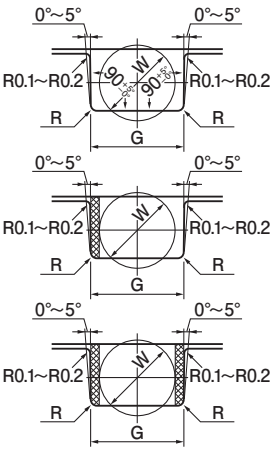



For external pressure



For internal pressure

(Note) Chamfering is indicated in accordance with NOK recommended values.

■JIS dimension identification codes represent "product type + material specification + dimensional specification + appearance grade."

■We also offer parts with the same dimensions as the Old JASO standards in addition to the materials given for the following lineups.
Please refer to pages 46 through 53 for more details.
- Class 3 (SBR materials)
- Class 4E (acrylic materials)
- Class 5 (EPDM materials)
- Material H (H-NBR materials)

Groove Shapes For Flat Face Static Applications

(Unit: mm)

Composite burr dimension f	Groove dimensions (based on JIS standard values)									
	Dimension d		Dimensions D		Dimension G (tolerance $^{+0.25}_{0}$)			Dimension H	Dimension R	Max. center misalignment (TIR) of D and d for dynamic or cylindrical surface static applications
	d	Tolerance	D	Tolerance	No backup rings	Backup ring on one side	Backup rings on both sides	H±0.05	Max. value	
0.12 or less	25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170 175 180 185 190 195 200	0 −0.10	30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170 175 180 185 190 195 200 205	+0.10 0	4.1	5.6	7.3	2.4	0.7	0.08
0.16 or less	150 155 160 165 170 175 180 185 190 195 200 205 210 215	0 −0.10	160 165 170 175 180 185 190 195 200 205 210 215 220 225	+0.10 0	7.5	9.0	11.5	4.6	0.8	0.10

Ex. 3) For parts with an inside diameter of 24.4 and a thickness of 3.1: 4CG25
Ex. 4) For parts with an inside diameter of 24.4 and a thickness of 3.1: 5G25

JIS B 2401-1 G Series (Static Applications)

Material								
	JIS	NBR-70-1	NBR-90	NBR-70-2	FKM-70	FKM-90	—	—
	Old JIS*	Class 1A	Class 1B	Class 2	Class 4D	—	Class 4C	—
	JASO	Class 1A	—	Class 2	Class 4D	—	Class 4C	Class 5
	NOK code	A305	A105	A122	F201	F940	S503	E116

*Old JIS: JIS B 2401-2005

■ When ordering, please make sure to specify both the ① JIS dimension identification code and ② NOK part number.

Ex.1) If you wish to purchase a part with an inside diameter of 264.3 and thickness of 5.7 made of material NBR-70-1:
- JIS identification code: **OR NBR-70-1 G265-N**
- NOK part number: **CO 06543 A**

Ex.2) If you wish to purchase a part with an inside diameter of 264.3 and thickness of 5.7 made of material FKM-70:
- JIS identification code: **OR FKM-70 G265-N**
- NOK part number: **CO 06543 H0**

NOK part number								JIS dimension identification code		O-ring dimensions				
Type Dimension code	Material code							Take the material code to the left ← and substitute it for the "□" (except for 4C, 5).	(Reference) Old JIS nominal number	Thickness W	Inside diameter d_0	Tolerance of inside diameter 'd_0'		
	NBR-70-1	NBR-90	NBR-70-2	FKM-70	FKM-90	4C**	5***					A305 (NBR-70-1) A105 (NBR-90) A122 (NBR-70-2)	F201 (FKM-70) F940 (FKM-90)	Class 4C S503 Class 5 E116
	Class 1A A305	Class 1B A105	Class 2 A122	Class 4D F201	F940	Class 4C S503	E116							
CO 00237		B	C	U3	Z0	L		OR□G220 -N	G220		219.3	±1.68	±2.01	±2.52
CO 02011*		—	—	P0	—	—		OR□G225 -N*	G225*		224.3	±1.71	±2.05	—
CO 00238		B	C	U3	W0	L		OR□G230 -N	G230		229.3	±1.73	±2.07	±2.59
CO 02031*		—	—	O0	—	—		OR□G235 -N*	G235*		234.3	±1.78	±2.14	—
CO 00239		B	C	U3	D0	L		OR□G240 -N	G240		239.3	±1.81	±2.17	±2.71
CO 02060*		—	—	G0	—	—		OR□G245 -N*	G245*		244.3	±1.85	±2.22	—
CO 00240		B	C	U3	G1	L		OR□G250 -N	G250		249.3	±1.88	±2.25	± 2.82
CO 02079*		—	—	H0	—	—		OR□G255 -N*	G255*		254.3	±1.91	±2.29	—
CO 00241		B	C	U3	Z0	L		OR□G260 -N	G260		259.3	±1.94	±2.32	± 2.91
CO 06543*		—	—	H0	—	—		OR□G265 -N*	G265*		264.3	±1.98	±2.38	—
CO 00242		B	C	U3	Z0	L		OR□G270 -N	G270		269.3	±2.01	±2.41	± 3.01
CO 02100*		—	—	H0		—		OR□G275 -N*	G275*		274.3	±2.04	±2.45	—
CO 00243		B	C	U3	—	L		OR□G280 -N	G280		279.3	±2.07	±2.48	± 3.10
CO 03210*		—	—	H0		—		OR□G285 -N*	G285*		284.3	±2.11	±2.53	—
CO 00244		B	C	U3	Y0	L		OR□G290 -N	G290		289.3	±2.14	±2.56	± 3.21
CO 06566*		—	—	P0		—		OR□G295 -N*	G295*		294.3	±2.17	±2.60	—
CO 00245		B	C	U3		L		OR□G300 -N	G300		299.3	±2.20	±2.64	±3.30
DO 01137*								OR□G305 -N*	G305*		304.3	±2.24	±2.69	
CO 02158*								OR□G310 -N*	G310*		309.3	±2.27	±2.72	
CO 08811*								OR□G315 -N*	G315*		314.3	±2.30	±2.76	
CO 02176*								OR□G320 -N*	G320*		319.3	±2.33	±2.80	
CO 08812*								OR□G325 -N*	G325*		324.3	±2.36	±2.83	
CO 08813*								OR□G330 -N*	G330*		329.3	±2.39	±2.87	
CO 08814*								OR□G335 -N*	G335*		334.3	±2.42	±2.90	
CO 02206*								OR□G340 -N*	G340*		339.3	±2.45	±2.94	
CO 02216*								OR□G345 -N*	G345*		344.3	±2.48	±2.98	
CO 02223*								OR□G350 -N*	G350*		349.3	±2.51	±3.01	
CO 08815*								OR□G355 -N*	G355*		354.3	±2.54	±3.05	
CO 02244*	A						—	OR□G360 -N*	G360*	5.7±0.13	359.3	±2.57	±3.08	
CO 08816*								OR□G365 -N*	G365*		364.3	±2.60	±3.12	
CO 08817*								OR□G370 -N*	G370*		369.3	±2.63	±3.16	
CO 08818*								OR□G375 -N*	G375*		374.3	±2.67	±3.20	
CO 02272*								OR□G380 -N*	G380*		379.3	±2.70	±3.24	
CO 08819*								OR□G385 -N*	G385*		384.3	±2.73	±3.28	
CO 02287*								OR□G390 -N*	G390*		389.3	±2.77	±3.32	
CO 08820*								OR□G395 -N*	G395*		394.3	±2.79	±3.35	
CO 02301*								OR□G400 -N*	G400*		399.3	±2.82	±3.38	
CO 08821*		—	—	G0	—	—		OR□G405 -N*	G405*		404.3			—
CO 08822*								OR□G410 -N*	G410*		409.3			
CO 02336*								OR□G415 -N*	G415*		414.3			
CO 08823*								OR□G420 -N*	G420*		419.3			
CO 02358*								OR□G425 -N*	G425*		424.3	±3.00	±3.60	
CO 08824*								OR□G430 -N*	G430*		429.3			
CO 08825*								OR□G435 -N*	G435*		434.3			
CO 08826*								OR□G440 -N*	G440*		439.3			
CO 08827*								OR□G445 -N*	G445*		444.3			
CO 02417*								OR□G450 -N*	G450*		449.3			
CO 08828*								OR□G455 -N*	G455*		454.3			
CO 02441*								OR□G460 -N*	G460*		459.3			
CO 06715*								OR□G465 -N*	G465*		464.3			
CO 02460*								OR□G470 -N*	G470*		469.3			
CO 08829*								OR□G475 -N*	G475*		474.3			
CO 08830*								OR□G480 -N*	G480*		479.3	±3.30	±4.00	
CO 08831*								OR□G485 -N*	G485*		484.3			
CO 08832*								OR□G490 -N*	G490*		489.3			
CO 08833*								OR□G495 -N*	G495*		494.3			
CO 08834*								OR□G500 -N*	G500*		499.3			

*For these code numbers, only rubber materials A305 and F201 are available.

**Dimension identification codes for 4C are given as follows: "4C□". Please take the Old JIS nominal number and substitute if for the "□".

■JIS dimension identification codes represent "product type + material specification + dimensional specification + appearance grade."

■We also offer parts with the same dimensions as the Old JASO standards in addition to the materials given for the following lineups.

Please refer to pages 46 through 53 for more details.

- Class 3 (SBR materials)
- Class 4E (acrylic materials)
- Class 5 (EPDM materials)
- Material H (H-NBR materials)

(Unit: mm)


	Groove dimensions (based on JIS standard values)									
	Composite burr dimension f	Dimension d		Dimensions D		Dimension G (tolerance $^{+0.25}_{0}$)			Dimension H	Dimension R	Max. center misalignment (TIR) of D and d for dynamic or cylindrical surface static applications
		d	Tolerance	D	Tolerance	No backup rings	Backup ring on one side	Backup rings on both sides	H±0.05	Max. value	
	0.16 or less	220 225 230 235 240 245 250 255 260 265 270 275 280 285 290 295 300 305 310 315 320 325 330 335 340 345 350 355 360 365 370 375 380 385 390 395 400 405 410 415 420 425 430 435 440 445 450 455 460 465 470 475 480 485 490 495 500	0 −0.10	230 235 240 245 250 255 260 265 270 275 280 285 290 295 300 305 310 315 320 325 330 335 340 345 350 355 360 365 370 375 380 385 390 395 400 405 410 415 420 425 430 435 440 445 450 455 460 465 470 475 480 485 490 495 500 505 510	+0.10 0	7.5	9.0	11.5	4.6	0.8	0.10

Ex. 3) For parts with an inside diameter of 219.3 and a thickness of 5.7: 4C G220


G Series

NOK S Series (Static Applications)

Material (NOK code)	A305	F201	E116

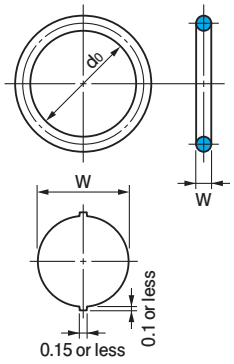

O-Ring Dimensions

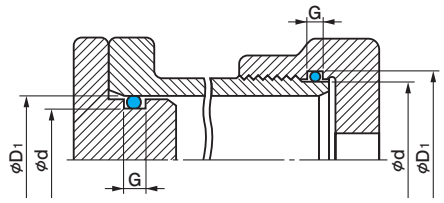


(Extrusion clearance: Refer to Fig.1-3 on page 15.)


For Cylindrical Surface Static Applications

(Unit: mm)


NOK part number				NOK nominal number	O-ring dimensions					Groove dimensions				
Type Dimension code	Material code				Thickness W	Inside diameter d_0	Tolerance of inside diameter 'd_0'			$d\ {}^{0}_{-0.05}$	$D_1\ {}^{+0.05}_{0}$	$D_2\ {}^{+0.05}_{0}$	$G\ {}^{+0.25}_{0}$	$H\ {}^{0}_{-0.1}$
	A305	F201	E116				A305	F201	E116					
CO 0500		O3	P0	S 3		2.5				3	5	5.8		
CO 0501		P3	N1	S 4		3.5				4	6	6.6		
CO 0502		P3	J0	S 5		4.5				5	7	7.4		
CO 0503		Q2	S1	S 6		5.5				6	8	8.3		
CO 0504		S0	G1	S 7		6.5				7	9	9.3		
CO 0505		P0	Y0	S 8		7.5				8	10	10.3		
CO 0506		O1	Z0	S 9		8.5				9	11	11.3		
CO 0507		O3	V1	S 10		9.5		±0.24	±0.36	10	12	12.3		
CO 0508	A	P2	X0	S 11.2	1.5±0.1	10.7				11.2	13.2	13.5	2.5	1.0
CO 0509		N2	H1	S 12		11.5				12	14	14.3		
CO 0510		Q0	X0	S 12.5		12.0				12.5	14.5	14.8		
CO 0511		R0	Y1	S 14		13.5				14	16	16.3		
CO 0512		P2	V0	S 15		14.5				15	17	17.3		
CO 0513		N4	S1	S 16		15.5				16	18	18.3		
CO 0514		R0	Z0	S 18		17.5				18	20	20.3		
CO 0515		O2	X0	S 20		19.5				20	22	22.3		
CO 0516		N1	X0	S 22		21.5	±0.15			22	24	24.3		
CO 0517		P2	V0	S 22.4		21.9				22.4	25.4	25.9		
CO 0518		O4	S0	S 24		23.5				24	27	27.5		
CO 0519		U3	H1	S 25		24.5				25	28	28.5		
CO 0520		N2	W0	S 26		25.5				26	29	29.5		
CO 0521		N2	U0	S 28		27.5				28	31	31.5		
CO 0522		Q0	T0	S 29		28.5				29	32	32.5		
CO 0523		P8	V0	S 30		29.5				30	33	33.5		
CO 0524		U3	O0	S 31.5		31.0		±0.3	±0.45	31.5	34.5	35		
CO 0525	A	U3	X0	S 32	2.0±0.1	31.5				32	35	35.5	2.7	1.5
CO 0526		N3	T0	S 34		33.5				34	37	37.5		
CO 0527		P0	Z0	S 35		34.5				35	38	38.5		
CO 0528		N0	Q0	S 35.5		35.0				35.5	38.5	39		
CO 0529		P0	X0	S 36		35.5				36	39	39.5		
CO 0530		G0	W0	S 38		37.5				38	41	41.5		
CO 0531		U3	X0	S 39		38.5				39	42	42.5		
CO 0532		H0	G1	S 40		39.5				40	43	43.5		



For external pressure



For internal pressure



(Note) Chamfering is indicated in accordance with NOK recommended values.

Groove Shapes For Flat Face Static Applications

The NOK S Series is a series of small diameter O-rings that have been specifically designed to meet the demand for use in compact hardware.

■ When ordering, please make sure to specify the NOK part number.

Ex. 1) If you wish to purchase a part with an inside diameter of 8.5 and thickness of 1.5 made of material A305:
- NOK part number: CO 0506 A
  Type/dimension code — Material code

Ex. 2) If you wish to purchase a part with an inside diameter of 8.5 and thickness of 1.5 made of material F201:
- NOK part number: CO 0506 Q1
  Type/dimension code — Material code


(Unit: mm)

NOK part number				NOK nominal number	O-ring dimensions					Groove dimensions				
Type Dimension code	Material code				Thickness W	Inside diameter d_0	Tolerance of inside diameter 'd_0'			$d\ ^{0}_{-0.05}$	$D_1\ ^{+0.05}_{0}$	$D_2\ ^{+0.05}_{0}$	$G\ ^{+0.25}_{0}$	$H\ ^{0}_{-0.1}$
	A305	F201	E116				A305	F201	E116					
CO 0533	A	U3	W0	S 42	2.0±0.1	41.5	±0.25	±0.5	±0.75	42	45	45.5	2.7	1.5
CO 0534		U3	V0	S 44		43.5				44	47	47.5		
CO 0535		H0	V0	S 45		44.5				45	48	48.5		
CO 0536		G0	R0	S 46		45.5				46	49	49.5		
CO 0537		G0	V0	S 48		47.5				48	51	51		
CO 0538		U3	H0	S 50		49.5				50	53	53		
CO 0539		U3	S0	S 53		52.5				53	56	56		
CO 0540		U3	V0	S 55		54.5				55	58	58		
CO 0541		H0	U0	S 56		55.5				56	59	59		
CO 0542		G0	Y0	S 60		59.5				60	63	63		
CO 0543		G0	U0	S 63		62.5				63	66	66		
CO 0544		P0	Q0	S 65		64.5				65	68	68		
CO 0545		U3	S0	S 67		66.5				67	70	70		
CO 0546		U3	Y0	S 70		69.5				70	73	73		
CO 0547		G0	T0	S 71		70.5				71	74	74		
CO 0548		R0	T0	S 75		74.5				75	78	78		
CO 0549		U3	G1	S 80		79.5				80	83	83		
CO 0550		N2	S0	S 85		84.5				85	88	88		
CO 0551		G0	E0	S 90		89.5			±1.2	90	93	93		
CO 0552		U3	Q0	S 95		94.5				95	98	98		
CO 0553		G0	T0	S 100		99.5	±0.4	±0.8		100	103	103		
CO 0554		N3	R0	S 105		104.5				105	108	108		
CO 0555		U3	S1	S 110		109.5				110	113	113		
CO 0556		N0		S 112		111.5				112	115	115		
CO 0557		N1		S 115		114.5				115	118	118		
CO 0558		U3		S 120		119.5				120	123	123		
CO 0559		G0		S 125		124.5				125	128	128		
CO 0560		G0	—	S 130		129.5			—	130	133	133		
CO 0561		G0		S 132		131.5				132	135	135		
CO 0562		G0		S 135		134.5				135	138	138		
CO 0563		G0		S 140		139.5	±0.6	±1.2		140	143	143		
CO 0564		G0		S 145		144.5				145	148	148		
CO 0565		G0		S 150		149.5				150	153	153		


S Series

NOK SS Series (Static Applications)

Material (NOK code)	A305	F201

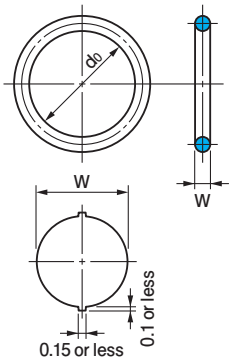


O-Ring Dimensions

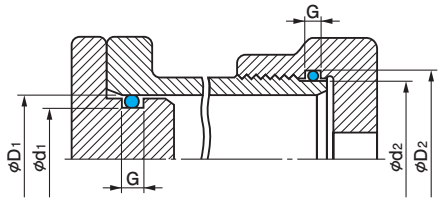


(Extrusion clearance: Refer to Fig. 1-3 on page 15.)

For Cylindrical Surface Static Applications




(Note) Chamfering is indicated in accordance with NOK recommended values.

Groove Shapes



For external pressure



For internal pressure

For Flat Face Static Applications

(Unit: mm)

NOK part number			NOK nominal number	O-ring dimensions				Groove dimensions							
Type Dimension code	Material code A305	Material code F201		Thickness W	Inside diameter d_0	Tolerance of inside diameter 'd_0' A305	Tolerance of inside diameter 'd_0' F201	$d_1{}_{-0.05}^{0}$	$d_2{}_{-0.05}^{0}$	$D_1{}_{0}^{+0.05}$	$D_2{}_{0}^{+0.05}$	$D_3{}_{0}^{+0.05}$	$G{}_{0}^{+0.15}$	$H{}_{0}^{+0.05}$
CO 3325		N0	SS 2		1.8			2.0	1.9	3.3	3.3	3.7		
CO 2956		N1	SS 2.5		2.0			2.5	2.1	3.8	3.5	3.9		
CO 3700		G0	SS 3		2.5			3.0	2.6	4.3	4.0	4.3		
CO 3835		N0	SS 3.5		3.0			3.5	3.1	4.8	4.5	4.7		
DO 1127		G0	SS 4		3.5			4.0	3.6	5.3	5.0	5.1		
CO 7820		N0	SS 4.5		4.0			4.5	4.1	5.8	5.5	5.5		
CO 3729		N0	SS 5		4.5			5.0	4.6	6.3	6.0	6.0		
CO 3370		H0	SS 5.5		5.0			5.5	5.1	6.8	6.5	6.5		
CO 3765		N0	SS 6		5.5			6.0	5.6	7.3	7.0	7.0		
CO 3216		H0	SS 6.5		6.0			6.5	6.1	7.8	7.5	7.5		
CO 8846	A	G0	SS 7	1.0±0.07	6.5	±0.15	±0.20	7.0	6.6	8.3	8.0	8.0	1.5	0.7
CO 5497		G0	SS 7.5		7.0			7.5	7.1	8.8	8.5	8.5		
CO 4275		P0	SS 8		7.5			8.0	7.6	9.3	9.0	9.0		
CO 7044		H0	SS 8.5		8.0			8.5	8.1	9.8	9.5	9.5		
CO 4945		G0	SS 9		8.5			9.0	8.6	10.3	10.0	10.0		
CO 7949		G0	SS 9.5		9.0			9.5	9.1	10.8	10.5	10.5		
CO 8847		G0	SS 10		9.5			10.0	9.6	11.3	11.0	11.0		
CO 8848		G0	SS 10.5		10.0			10.5	10.1	11.8	11.5	11.5		
CO 8849		G0	SS 11		10.5			11.0	10.6	12.3	12.0	12.0		
CO 5952		H0	SS 11.5		11.0			11.5	11.1	12.8	12.5	12.5		
CO 8850		G0	SS 12		11.5			12.0	11.6	13.3	13.0	13.0		

The NOK SS Series is a series of small diameter O-rings that have been specifically designed to meet the demand for use in compact hardware.

■ When ordering, please make sure to specify the NOK part number.

Ex.1) If you wish to purchase a part with an inside diameter of 11.5 and thickness of 1.0 made of material A305:
- NOK part number: CO 8850 A
  (Type/dimension code — Material code)

Ex.2) If you wish to purchase a part with an inside diameter of 11.5 and thickness of 1.0 made of material F201:
- NOK part number: CO 8850 G0
  (Type/dimension code — Material code)

SS Series


JIS B 2401-1 V Series (Vacuum Flange Applications)

Material	JIS	NBR-70-1	FKM-70
	Old JIS*	Class 1A	Class 4D
	NOK code	A305	F201

*Old JIS: JIS B 2401-2005

■ When ordering, please make sure to specify both the ① JIS dimension identification code and ② NOK part number.
Ex.) If you wish to purchase a part with an inside diameter of 99.0 and thickness of 4.0 made of material NBR-70-1:
- JIS identification code: **OR NBR-70-1 V100-N**
- NOK part number: **CO 00307 A**

■ JIS dimension identification codes represent "product type + material specification + dimensional specification + appearance grade."

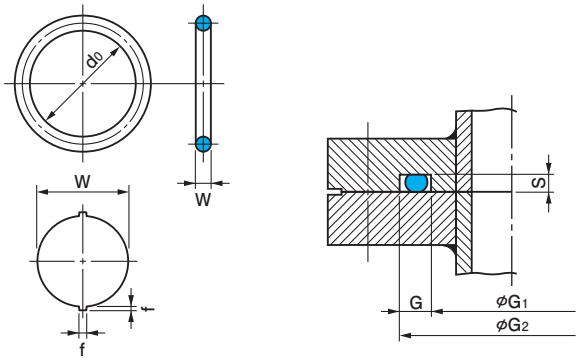

O-Ring Dimensions


(Unit: mm)

NOK part number			JIS dimension identification code		O-ring dimensions					Flange groove dimensions (based on JIS standards)				
Type Dimension code	Material code NBR-70-1 Class 1A A305	Material code FKM-70 Class 4D F201	Take the material code to the left ← and substitute it for the "□"	(Reference) Old JIS nominal number	Thickness W	Inside diameter d0	Tolerance of inside diameter 'd0' A305 (NBR-70-1)	Tolerance of inside diameter 'd0' F201 (FKM-70)	Composite burr dimension f	Dimension G1	Tolerance of G1	Dimension G2	G +0.1 0	S −0 −0.2
CO 00300		U3	OR□V15-N	V 15		14.5	±0.20	±0.24		15		25		
CO 00301		G0	OR□V24-N	V 24		23.5	±0.24	±0.28		24		34		
CO 00302		G0	OR□V34-N	V 34		33.5	±0.33	±0.39		34		44		
CO 00303		G0	OR□V40-N	V 40		39.5	±0.37	±0.44		40		50		
CO 00304		G0	OR□V55-N	V 55		54.5	±0.49	±0.58		55		65		
CO 00305	A	H0	OR□V70-N	V 70	4.0±0.1	69.0	±0.61	±0.73	0.14 or less	70		80	5.0	3.0
CO 00306		G0	OR□V85-N	V 85		84.0	±0.72	±0.86		85	+1.0 0	95		
CO 00307		H0	OR□V100-N	V 100		99.0	±0.83	±0.99		100		110		
CO 00308		U3	OR□V120-N	V 120		119.0	±0.97	±1.16		120		130		
CO 00309		U3	OR□V150-N	V 150		148.5	±1.18	±1.41		150		160		
CO 00310		P0	OR□V175-N	V 175		173.0	±1.36	±1.63		175		185		
CO 00311		U3	OR□V225-N	V 225		222.5	±1.70	±2.04		225		241		
CO 00312		G0	OR□V275-N	V 275		272.0	±2.02	±2.42		275		291		
CO 00313	A	G0	OR□V325-N	V 325	6.0±0.15	321.5	±2.34	±2.80	0.16 or less	325		341	8.0	4.5
CO 00314		G0	OR□V380-N	V 380		376.0	±2.68	±3.21		380		396		
CO 00315		P0	OR□V430-N	V 430		425.5	±2.99	±3.58		430		446		
CO 00316		G0	OR□V480-N	V 480		475.0	±3.30	±3.96		480	+1.5 0	504		
CO 00317		Q0	OR□V530-N*	V 530*		524.5	±3.60	±4.32		530		554		
CO 00318			OR□V585-N*	V 585*		579.0	±3.92	±4.70		585		609		
CO 00319			OR□V640-N*	V 640*		633.5	±4.24	±5.08		640		664		
CO 00320	A		OR□V690-N*	V 690*	10.0±0.3	683.0	±4.54	±5.44	0.18 or less	690		714	12.0	7.0
CO 00321		G0	OR□V740-N*	V 740*		732.5	±4.83	±5.79		740		764		
CO 00322			OR□V790-N*	V 790*		782.0	±5.12	±6.14		790	+2.0 0	814		
CO 00323			OR□V845-N*	V 845*		836.5	±5.44	±6.52		845		869		
CO 00324			OR□V950-N*	V 950*		940.5	±6.06	±7.27		950		974		
CO 00325			OR□V1055-N*	V1055*		1044.0	±6.67	±8.00		1055		1079		

*These code numbers indicate parts equivalent to the JIS B 2401-1 V Series.

Old ARP568 AS568 Series (Static Applications, AN6227 for Dynamic Applications) (O-Ring Hydraulic Applications for Use in Aircraft)

Material (NOK code)	A305	A105	F201

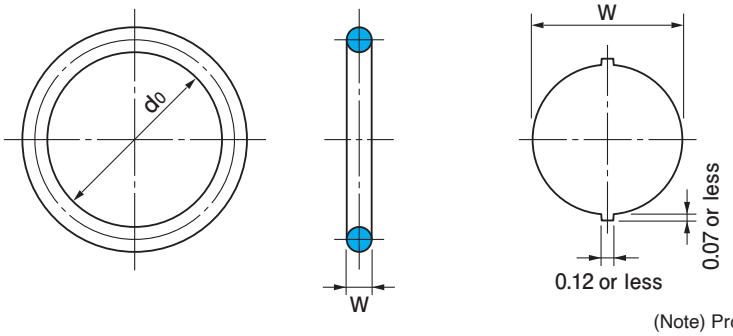

(Note) Produced using the same thickness W, inside diameter d0 tolerance, and residual burr dimensions as the Old JIS W 1516 and 1517.

(Unit: mm)

NOK part number				AS568 (Old ARP568) nominal number	Old AN6227	Old AN6230	O-ring dimensions			
Type Dimension code	Material code				Old JIS W 1516 nominal number	Old JIS W 1517 nominal number	Thickness W	Inside diameter d_0	Tolerance of inside diameter 'd_0'	
	A305	A105	F201						A305 A105	F201
CO 8424	A	B	H0	001			1.02±0.07	0.74	± 0.10	± 0.10
CO 3387			H0	002			1.27±0.07	1.07		
CO 3388			H0	003			1.52±0.07	1.42		
CO 5146			O0	004			1.78±0.07	1.78	± 0.12	± 0.12
CO 3052			N0	005				2.57		
CO 0400			H0	006	1			2.90		
CO 0401			H0	007	2			3.68		
CO 0402			O0	008	3			4.47		
CO 0403			H0	009	4			5.28		
CO 0404			G0	010	5			6.07		
CO 0405			G0	011	6			7.65	± 0.12	
CO 0407			O4	012	7			9.25		
CO 3174			N0	013				10.82		
CO 1119			X0	014				12.42		
CO 1140			G0	015				14.00		± 0.17
CO 3035			O0	016				15.60		
CO 1179			G0	017				17.17		
CO 1203			O0	018				18.77		± 0.22
CO 1225			N0	019				20.35	± 0.15	
CO 1241			N0	020				21.95		
CO 3037			N0	021				23.52		
CO 4368			O0	022				25.12		
CO 3173			G0	023				26.70		± 0.25
CO 1302			G0	024				28.30		
CO 3636			G0	025				29.87		
CO 3093			G0	026				31.47		± 0.27
CO 7771			G0	027				33.05		
CO 3092			G0	028				34.65		± 0.33
CO 6134			H0	029				37.82	± 0.25	
CO 3191			G0	030				41.00		
CO 5191			H0	031				44.17		± 0.38
CO 3235			G0	032				47.35		
CO 5346			H0	033				50.52		± 0.45
CO 1467			G0	034				53.70		
CO 7772			G0	035				56.87		
CO 4714			G0	036				60.05		
CO 8462			G0	037				63.22		
CO 8231			G0	038				66.40		± 0.50
CO 4699			G0	039				69.57	± 0.38	
CO 4457			G0	040				72.75		
CO 7129			G0	041				75.92		± 0.60
CO 4335			G0	042				82.27		
CO 3010			H0	043				88.62		
CO 8205			G0	044				94.97		± 0.68
CO 4251			G0	045				101.32		
CO 4873			G0	046				107.67		± 0.76
CO 4947			N0	047				114.02		

■ When ordering, please make sure to specify the NOK part number.

Ex. 1) If you wish to purchase a part with an inside diameter of 2.9 and thickness of 1.78 made of material A305:
- NOK part number: CO 0400 A
  Type/dimension code ┘ └ Material code

Ex. 2) If you wish to purchase a part with an inside diameter of 2.9 and thickness of 1.78 made of material F201:
- NOK part number: CO 0400 H0
  Type/dimension code ┘ └ Material code


■ Please refer to pages 16 through 17 and page 79 for details on groove shapes.

(Unit: mm)

NOK part number				AS568 (Old ARP568) nominal number	Old AN6227	Old AN6230	O-ring dimensions			
Type Dimension code	Material code				Old JIS W 1516 nominal number	Old JIS W 1517 nominal number	Thickness W	Inside diameter d_0	Tolerance of inside diameter 'd_0'	
	A305	A105	F201						A305 A105	F201
CO 4252	A	B	G0	048			1.78±0.07	120.37	± 0.38	± 0.76
CO 8463			G0	049				126.72	± 0.58	± 0.93
CO 4948			N0	050				133.07		
CO 8485	A	B	G0	102			2.62±0.07	1.24	± 0.12	± 0.12
CO 8464			G0	103				2.06		
CO 8465			G0	104				2.84		
CO 8466			G0	105				3.63		
CO 8467			G0	106				4.42		
CO 6006			G0	107				5.23		
CO 8468			G0	108				6.02		
CO 3084			O0	109				7.59		
CO 0406			R0	110	8			9.19		± 0.17
CO 0408			P0	111	9			10.77		
CO 0409			U3	112	10			12.37		
CO 0410			P2	113	11			13.94		
CO 0411			U3	114	12			15.54		± 0.22
CO 0412			R0	115	13			17.12		
CO 0414			N2	116	14			18.72		
CO 4370			H0	117				20.29		± 0.25
CO 1240			G0	118				21.89		
CO 6065			G0	119				23.46		
CO 3805			N0	120				25.07		
CO 3601			H0	121				26.64		
CO 4128			H0	122				28.24	± 0.15	
CO 3105			G0	123				29.82		± 0.30
CO 3112			G0	124				31.42		
CO 3230			G0	125				32.99		
CO 3449			U3	126				34.59		
CO 1367			G0	127				36.17		
CO 1380			G0	128				37.77		
CO 3851			G0	129				39.34	± 0.25	± 0.38
CO 4408			G0	130				40.94		
CO 6151			G0	131				42.52		
CO 6155			G0	132				44.12		
CO 3152			G0	133				45.69		
CO 1433			G0	134				47.29		± 0.43
CO 8469			G0	135				48.90		
CO 4330			H0	136				50.47		
CO 1461			G0	137				52.07		
CO 3707			G0	138				53.64		
CO 6189			G0	139				55.24		± 0.50
CO 3107			H0	140				56.82		
CO 6202			N0	141				58.42		
CO 6210			G0	142				59.99		
CO 7872			G0	143				61.59		
CO 4253			N0	144				63.17		

Old ARP568 AS568 Series (Static Applications, AN6227 for Dynamic Applications) (O-Ring Hydraulic Applications for Use in Aircraft)

Material (NOK code)	A305	A105	F201

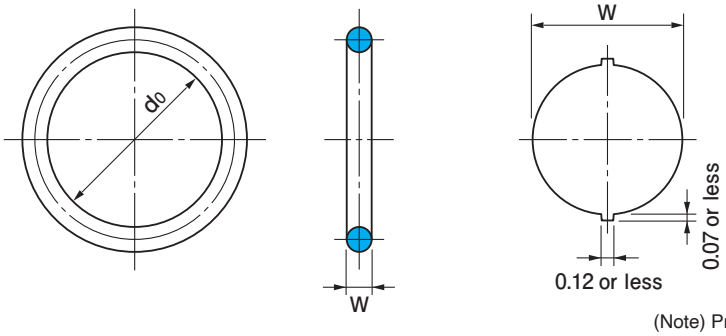

(Note) Produced using the same thickness W, inside diameter d0 tolerance, and residual burr dimensions as the Old JIS W 1516 and 1517.

(Unit: mm)

NOK part number				AS568 (Old ARP568) nominal number	Old AN6227	Old AN6230	O-ring dimensions			
Type Dimension code	Material code				Old JIS W 1516 nominal number	Old JIS W 1517 nominal number	Thickness W	Inside diameter d0	Tolerance of inside diameter 'd0'	
	A305	A105	F201						A305 A105	F201
CO 1518	A	B	G0	145			2.62±0.07	64.77	± 0.25	± 0.50
CO 3148			G0	146				66.34		
CO 3103			G0	147				67.94	± 0.38	± 0.55
CO 4718			G0	148				69.52		
CO 6254			H0	149				71.12		
CO 6261			G0	150				72.69		
CO 6268			G0	151				75.87		± 0.60
CO 6276			G0	152				82.22		
CO 3568			G0	153				88.57		
CO 4837			G0	154				94.92		± 0.71
CO 7031			G0	155				101.27		
CO 1640			G0	156				107.62		± 0.76
CO 5357			G0	157				113.97		
CO 6356			H0	158				120.32		
CO 7811			H0	159				126.67		± 0.88
CO 1720			G0	160				133.02	± 0.58	
CO 4812			H0	161				139.37		
CO 7130			G0	162				145.72		
CO 1808			G0	163				152.07		
CO 1830			G0	164				158.42		± 1.01
CO 5411			G0	165				164.77		
CO 6432			G0	166				171.12		
CO 6437			G0	167				177.47		
CO 6445			G0	168				183.82	± 0.76	± 1.14
CO 8470			G0	169				190.17		
CO 5303			G0	170				196.52		
CO 7775			G0	171				202.87		
CO 5270			G0	172				209.22		± 1.27
CO 7776			G0	173				215.57		
CO 8187			G0	174				221.92		
CO 8534			G0	175				228.27		
DO 1122			G0	176				234.62		± 1.39
DO 1123			G0	177				240.97		
DO 1124			G0	178				247.32		
CO 8471	A	B	G0	201			3.53±0.10	4.34	± 0.12	± 0.12
CO 8472			G0	202				5.94		
CO 4527			X0	203				7.52		
CO 7048			G0	204				9.12		
CO 7049			G0	205				10.69		
CO 8460			G0	206				12.29		± 0.17
CO 7059			H0	207				13.87		
CO 5250			G0	208				15.47		± 0.22
CO 8461			G0	209				17.04		
CO 0413			G0	210	15			18.64	± 0.15	± 0.25
CO 0415			P0	211	16			20.22		
CO 0416			P0	212	17			21.82		
CO 0417			O0	213	18			23.39		

■ When ordering, please make sure to specify the NOK part number.

Ex.1) If you wish to purchase a part with an inside diameter of 69.52 and thickness of 2.62 made of material A305:
- NOK part number: CO 4718 A
  (Type/dimension code: CO 4718; Material code: A)

Ex.2) If you wish to purchase a part with an inside diameter of 69.52 and thickness of 2.62 made of material F201:
- NOK part number: CO 4718 G0
  (Type/dimension code: CO 4718; Material code: G0)


■ Please refer to pages 16 through 17 and page 79 for details on groove shapes.

(Unit: mm)

NOK part number				AS568 (Old ARP568) nominal number	Old AN6227	Old AN6230	O-ring dimensions			
Type Dimension code	Material code				Old JIS W 1516 nominal number	Old JIS W 1517 nominal number	Thickness W	Inside diameter d_0	Tolerance of inside diameter 'd_0'	
	A305	A105	F201						A305 A105	F201
CO 0418	A	B	O3	214	19		3.53±0.10	24.99	± 0.15	± 0.25
CO 0419			P4	215	20			26.57		
CO 0420			R0	216	21			28.17		± 0.30
CO 0421			U3	217	22			29.74		
CO 0422			N0	218	23			31.34		
CO 0423			R0	219	24			32.92		
CO 0424			P0	220	25			34.52		
CO 0425			U3	221	26			36.09		
CO 0426			Q0	222	27			37.69		± 0.38
CO 0350			O0	223		1		40.87	± 0.25	
CO 0351			Q0	224		2		44.04		
CO 0352			O3	225		3		47.22		± 0.45
CO 0353			R0	226		4		50.39		
CO 0354			Q0	227		5		53.57		
CO 0355			U3	228		6		56.74		± 0.50
CO 0356			R0	229		7		59.92		
CO 0357			U3	230		8		63.09		
CO 0358			U3	231		9		66.27		
CO 0359			P0	232		10		69.44	± 0.38	± 0.60
CO 0360			U3	233		11		72.62		
CO 0361			U3	234		12		75.79		
CO 0362			U3	235		13		78.97		
CO 0363			P0	236		14		82.14		
CO 0364			O0	237		15		85.32		± 0.71
CO 0365			Q0	238		16		88.49		
CO 0366			U3	239		17		91.67		
CO 0367			N1	240		18		94.84		
CO 0368			R0	241		19		98.02		
CO 0369			U3	242		20		101.19		± 0.76
CO 0370			U3	243		21		104.37		
CO 0371			U3	244		22		107.54		
CO 0372			U3	245		23		110.72		
CO 0373			U3	246		24		113.89		
CO 0374			U3	247		25		117.07		± 0.88
CO 1672			U3	248		26		120.24		
CO 1680			U3	249		27		123.42		
CO 1691			U3	250		28		126.59		
CO 1705			U3	251		29		129.77	± 0.58	
CO 1717			N0	252		30		132.94		
CO 4047			U3	253		31		136.12		
CO 1744			G0	254		32		139.29		
CO 1762			U3	255		33		142.47		
CO 1774			G0	256		34		145.64		± 1.01
CO 1786			U3	257		35		148.82		
CO 1805			Q0	258		36		151.99		
CO 1829			U3	259		37		158.34		
CO 1856			U3	260		38		164.69		
CO 1880			U3	261		39		171.04		

Old ARP568 AS568 Series (Static Applications, AN6227 for Dynamic Applications) (O-Ring Hydraulic Applications for Use in Aircraft)

Material (NOK code)	A305	A105	F201

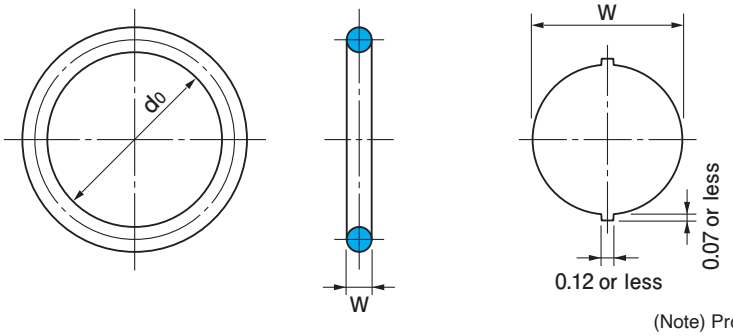

(Note) Produced using the same thickness W, inside diameter d0 tolerance, and residual burr dimensions as the Old JIS W 1516 and 1517.

(Unit: mm)

NOK part number				AS568 (Old ARP568) nominal number	Old AN6227	Old AN6230	O-ring dimensions			
Type Dimension code	Material code				Old JIS W 1516 nominal number	Old JIS W 1517 nominal number	Thickness W	Inside diameter d0	Tolerance of inside diameter 'd0'	
	A305	A105	F201						A305 A105	F201
CO 1893	A	B	U3	262		40	3.53±0.10	177.39	± 0.58	± 1.01
CO 1915			U3	263		41		183.74	± 0.76	± 1.14
CO 1931			U3	264		42		190.09		
CO 1946			U3	265		43		196.44		
CO 1959			U3	266		44		202.79		
CO 1979			U3	267		45		209.14		± 1.27
CO 1990			U3	268		46		215.49		
CO 2001			U3	269		47		221.84		
CO 2018			G0	270		48		228.19		
CO 2032			G0	271		49		234.54		± 1.39
CO 2050			G0	272		50		240.89		
CO 2064			G0	273		51		247.24		
CO 3415			G0	274		52		253.59		
CO 5748			N0	275				266.29		± 1.65
CO 5393			G0	276				278.99		
CO 2132			G0	277				291.69		
CO 4602			G0	278				304.39		
CO 2192			G0	279				329.79		
CO 4549			G0	280				355.19		
CO 2277			G0	281				380.59		
CO 4609			G0	282				405.26	± 1.14	± 1.90
CO 6675			H0	283				430.66		± 2.03
CO 5011			G0	284				456.06		± 2.15
CO 8486	A	B	G0	309			5.33±0.12	10.46	± 0.12	± 0.12
CO 8487			G0	310				12.06		
CO 8488			O0	311				13.64		± 0.17
CO 4082			G0	312				15.24		± 0.22
CO 8480			O0	313				16.81		
CO 8481			G0	314				18.42		± 0.25
CO 7777			G0	315				19.99	± 0.15	
CO 8482			G0	316				21.59		
CO 6064			G0	317				23.16		
CO 3025			G0	318				24.76		
CO 8483			G0	319				26.34		
CO 4337			O0	320				27.94		± 0.30
CO 7778			G0	321				29.51		
CO 4081			G0	322				31.12		
CO 8484			G0	323				32.69		
CO 4070			G0	324				34.29		
CO 0427			G0	325	28			37.46	± 0.25	± 0.38
CO 0428			U3	326	29			40.64		
CO 0429			G0	327	30			43.82		
CO 0430			P0	328	31			46.99		
CO 0431			U3	329	32			50.16		± 0.45
CO 0432			N0	330	33			53.34		
CO 0433			U3	331	34			56.52		

■ When ordering, please make sure to specify the NOK part number.

Ex.1) If you wish to purchase a part with an inside diameter of 190.09 and thickness of 3.53 made of material A305:
- NOK part number: CO 1931 A
  Type/dimension code ┘ └ Material code

Ex.2) If you wish to purchase a part with an inside diameter of 190.09 and thickness of 3.53 made of material F201:
- NOK part number: CO 1931 U3
  Type/dimension code ┘ └ Material code


■ Please refer to pages 16 through 17 and page 79 for details on groove shapes.

(Unit: mm)

NOK part number				AS568 (Old ARP568) nominal number	Old AN6227	Old AN6230	O-ring dimensions			
Type Dimension code	Material code				Old JIS W 1516 nominal number	Old JIS W 1517 nominal number	Thickness W	Inside diameter d_0	Tolerance of inside diameter 'd_0'	
	A305	A105	F201						A305 A105	F201
CO 0434	A	B	N0	332	35		5.33±0.12	59.69	± 0.25	± 0.45
CO 0435			U3	333	36			62.86		± 0.50
CO 0436			N0	334	37			66.04		
CO 0437			U3	335	38			69.22	± 0.38	
CO 0438			O2	336	39			72.39		
CO 0439			U3	337	40			75.56		± 0.60
CO 0440			N0	338	41			78.74		
CO 0441			P0	339	42			81.92		
CO 0442			N0	340	43			85.09		
CO 0443			U3	341	44			88.26		
CO 0444			G0	342	45			91.44		± 0.71
CO 0445			O3	343	46			94.62		
CO 0446			U3	344	47			97.79		
CO 0447			U3	345	48			100.96		
CO 0448			P0	346	49			104.14		
CO 0449			U3	347	50			107.32		± 0.76
CO 0450			U3	348	51			110.49		
CO 0451			U3	349	52			113.66		
CO 6340			U3	350				116.84		
CO 7779			G0	351				120.02		
CO 4133			G0	352				123.19		± 0.93
CO 6366			G0	353				126.36		
CO 4205			G0	354				129.54	± 0.58	
CO 5131			H0	355				132.72		
CO 6385			G0	356				135.89		
CO 5317			U3	357				139.07		
CO 7782			G0	358				142.24		
CO 4111			N0	359				145.42		± 1.01
CO 8429			G0	360				148.59		
CO 7783			G0	361				151.77		
CO 7784			G0	362				158.12		
CO 7785			G0	363				164.47		
CO 7786			G0	364				170.82		
CO 7787			G0	365				177.17		
CO 7819			H0	366				183.52	± 0.76	± 1.14
CO 3417			G0	367				189.86		
CO 1945			U3	368				196.22		
CO 7789			G0	369				202.57		
CO 7790			G0	370				208.92		± 1.27
CO 6492			G0	371				215.27		
CO 7791			G0	372				221.62		
CO 7792			G0	373				227.97		
CO 7793			G0	374				234.32		± 1.39
CO 8801			G0	375				240.67		
CO 8803			G0	376				247.02		
CO 7794			G0	377				253.37		
CO 4905			N0	378				266.07		± 1.52
CO 7795			G0	379				278.77		

Old ARP568 AS568 Series (Static Applications, AN6227 for Dynamic Applications) (O-Ring Hydraulic Applications for Use in Aircraft)

Material (NOK code)	A305	A105	F201

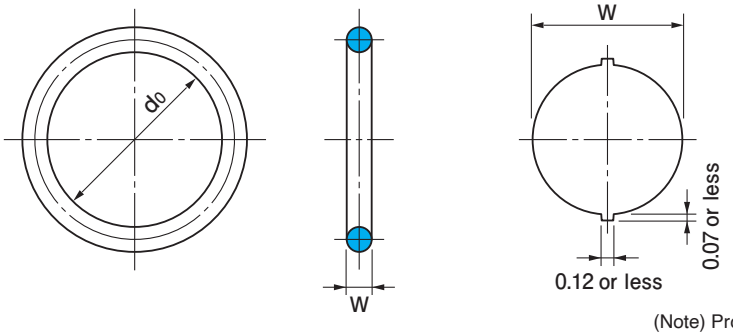

(Note) Produced using the same thickness W, inside diameter d0 tolerance, and residual burr dimensions as the Old JIS W 1516 and 1517.

(Unit: mm)

NOK part number				AS568 (Old ARP568) nominal number	Old AN6227	Old AN6230	O-ring dimensions			
Type Dimension code	Material code				Old JIS W 1516 nominal number	Old JIS W 1517 nominal number	Thickness W	Inside diameter d0	Tolerance of inside diameter 'd0'	
	A305	A105	F201						A305 A105	F201
CO 8851	A	B	G0	380			5.33±0.12	291.47	± 0.76	± 1.65
CO 4906			N0	381				304.17		
CO 7797			G0	382				329.57		
CO 7798			G0	383				354.97		± 1.77
CO 6643			G0	384				380.37		
CO 7799			G0	385				405.26		± 1.90
CO 8802			G0	386				430.66	± 1.14	± 2.03
CO 7826			H0	387				456.06		± 2.15
CO 7800			G0	388				481.46		± 2.28
CO 0487	A	B	G0	425	88		6.98±0.15	113.66	± 0.38	± 0.83
CO 0452			P0	426	53			116.84		
CO 0453			G0	427	54			120.02		
CO 0454			G0	428	55			123.19		
CO 0455			G0	429	56			126.36		± 0.93
CO 0456			U3	430	57			129.54	± 0.58	
CO 0457			G0	431	58			132.72		
CO 0458			G0	432	59			135.89		
CO 0459			G0	433	60			139.06		
CO 0460			G0	434	61			142.24		
CO 0461			G0	435	62			145.42		
CO 0462			G0	436	63			148.59		
CO 0463			U3	437	64			151.76		
CO 0464			G0	438	65			158.12		± 1.01
CO 0465			G0	439	66			164.46		
CO 0466			G0	440	67			170.82		
CO 0467			H0	441	68			177.16		
CO 0468			G0	442	69			183.52		± 1.14
CO 0469			G0	443	70			189.86		
CO 0470			G0	444	71			196.22		
CO 0471			G0	445	72			202.56		
CO 0472			G0	446	73			215.26		± 1.39
CO 0473			U3	447	74			227.96		
CO 0474			G0	448	75			240.66		
CO 0475			G0	449	76			253.36		
CO 0476			G0	450	77			266.06	± 0.76	± 1.52
CO 0477			U3	451	78			278.76		
CO 0478			G0	452	79			291.46		
CO 0479			G0	453	80			304.16		
CO 0480			G0	454	81			316.86		
CO 0481			U3	455	82			329.56		± 1.77
CO 0482			U3	456	83			342.26		
CO 0483			P0	457	84			354.96		
CO 0484			G0	458	85			367.66		
CO 0485			G0	459	86			380.36		
CO 0486			G0	460	87			393.06		
CO 4397			G0	461				405.26	± 1.14	± 1.90
CO 7806			G0	462				417.96		

■ When ordering, please make sure to specify the NOK part number.

Ex.1) If you wish to purchase a part with an inside diameter of 380.37 and thickness of 5.33 made of material A305:
- NOK part number: CO 6643 A
  Type/dimension code ┘ └ Material code

Ex.2) If you wish to purchase a part with an inside diameter of 380.37 and thickness of 5.33 made of material F201:
- NOK part number: CO 6643 G0
  Type/dimension code ┘ └ Material code

■ Please refer to pages 16 through 17 and page 79 for details on groove shapes.


(Unit: mm)

NOK part number				AS568 (Old ARP568) nominal number	Old AN6227	Old AN6230	O-ring dimensions			
Type Dimension code	Material code				Old JIS W 1516 nominal number	Old JIS W 1517 nominal number	Thickness W	Inside diameter d_0	Tolerance of inside diameter 'd_0'	
	A305	A105	F201						A305 A105	F201
CO 7807	A	B	G0	463			6.98±0.15	430.66	± 1.14	± 2.03
CO 2401			G0	464				443.36		± 2.15
CO 7808			G0	465				456.06		
CO 5107			G0	466				468.76		
CO 4270			G0	467				481.46		± 2.28
CO 8810			G0	468				494.16		
CO 5480	A	B	N0	901			1.42±0.07	4.70	± 0.12	± 0.15
CO 3091			O0	902			1.63±0.07	6.07		± 0.17
CO 7600			G0	903				7.64		
CO 3597			N0	904			1.83±0.07	8.92		
CO 1087			G0	905				10.52		
CO 3604			P0	906			1.98±0.07	11.89		
CO 8804			G0	907			2.08±0.07	13.46		
CO 1165			T0	908			2.21±0.07	16.36		± 0.22
CO 8805			G0	909			2.46±0.07	17.93		
CO 1206			O0	910				19.18		
CO 8234			G0	911			2.95±0.10	21.92		
CO 1253			G0	912				23.47	± 0.15	± 0.25
CO 8806			G0	913				25.04		
CO 2998			G0	914				26.59		
CO 1315			H0	916				29.74		
CO 8807			G0	918				34.42		± 0.30
CO 3640			G0	920			3.00±0.10	37.46	± 0.25	± 0.35
CO 3706			G0	924				43.69		
CO 8808			G0	928				53.09		± 0.45
CO 8809			G0	932				59.36		


Old JASO F 404 Thickness ø1.9 Series (Static/Dynamic Applications)

Material	JASO	Class 1A	Class 2	Class 3	Class 4C	Class 4D	Class 4E	Class 5	H*
	NOK code	A305	A122	R189	S503	F201	T767	E116	G607


Only the appearance grade differs with the current standards.

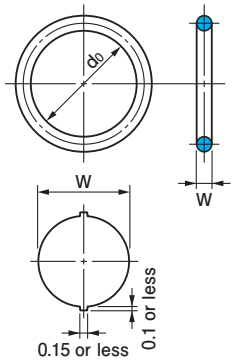

O-Ring Dimensions

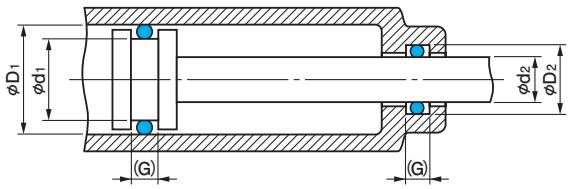

Dynamic Applications

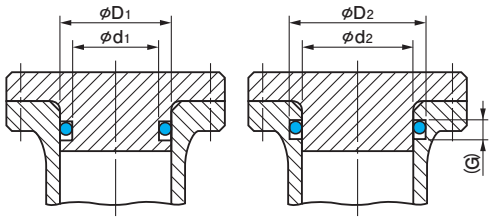


(Extrusion clearance: Refer to Fig.1-3 on page 15.)


For Cylindrical Surface Static Applications


NOK part number									NOK nominal number	O-ring dimensions				
Type Dimension code	Material code									Thickness W	Inside diameter d0	Tolerance of inside diameter 'd0'		
	Class 1A A305	Class 2 A122	Class 3 R189	Class 4C S503	Class 4D F201	Class 4E T767	Class 5 E116	H* G607				A305 (Class 1A) A122 (Class 2) R189 (Class 3)	S503 (Class 4C) T767 (Class 4E) E116 (Class 5)	F201 (Class 4D) G607 (H*)
CO 0000					S9	P2	S1	W0	1003		2.8			
CO 0001					R4	G4	H1	W0	1004		3.8			
CO 0002					S8	Z3	H1	X2	1005		4.8			
CO 0003					T9	H4	Z1	W0	1006		5.8			
CO 0004					T8	H4	O2	Q1	1007		6.8			
CO 0005					U5	T3	R2	V1	1008		7.8			
CO 0006					Q5	R3	U1	G0	1009		8.8			
CO 0007					U9	S4	O1	Y0	1010		9.8			
CO 0600	A	C	K	L	X0	G2	W0	R0	1011		11.0	±0.12	±0.36	±0.24
CO 0601					S0	G3	Z2	S1	1012		12.3			
CO 0602					T0	G3	Y0	Z0	1013		13.0			
CO 0604					P5	V1	H1	R0	1014		13.8			
CO 0605					N4	H3	R1	Q0	1015		14.8			
CO 0606					Q7	X2	N1	X0	1016		15.8			
CO 0607					O3	Q1	Y0	U0	1017	1.9±0.07	16.8			
CO 0609					N3	G3	Q1	R1	1018		17.8			
CO 0610					N0	W1	V0	G0	1019		18.8			
CO 0612					O3	H2	R1	V1	1020		19.8			
CO 0613					N4	G2	T0	G0	1021		21.0			
CO 0614					G0	H1	V0	R0	1022		22.1			
CO 0616					N0	G2	Y0	T0	1023		23.3			
CO 0618	A	C	K	L	U3	V0	S0	P0	1025		24.7	±0.15	±0.45	±0.30
CO 0620					N0	G1	W0	Y0	1026		26.2			
CO 0622					S0	X0	T0	G0	1028		27.7			
CO 0624					N0	U0	S0	O0	1030		29.7			
CO 0626					H0	S0	P0	Q0	1031		31.2			
CO 0628					O0	Z0	V0	W0	1033		33.2			
CO 0630					H0	T0	Q0	R0	1035		35.2			

*Material H is the NOK material code used for H-NBR (hydrogenated nitrile rubber).



For external pressure





For internal pressure

(Note) Chamfering is indicated in accordance with NOK recommended values.

Groove Shapes For Flat Face Static Applications

■ When ordering, please make sure to specify the NOK part number.

Ex.1) If you wish to purchase a part with an inside diameter of 17.8 and thickness of 1.9 made of material Class 1A:
- NOK part number: CO 0609 A
  Type/dimension code — Material code

Ex.2) If you wish to purchase a part with an inside diameter of 17.8 and thickness of 1.9 made of material Class 4D:
- NOK part number: CO 0609 N3
  Type/dimension code — Material code

*Please note that these parts differ with JIS standard parts in terms of appearance specifications.

*JASO standards do not contain specifications on dimension (G). Please use dimension G in place of dimension (G).


(Unit: mm)

Groove dimensions										
d_2 d_3	d_1	Tolerances for d_1, d_2, and d_3	D_1	D_2	D_3	Tolerances for D_1, D_2, and D_3	Dimension G	Dimension H	Dimension R	Max. center misalignment (TIR) of D_1 and d_1 or D_2 and d_2 for dynamic or cylindrical surface static applications
							$G^{+0.25}_{0}$	H±0.05	Max. value	
3	3.1	0 −0.05	6	5.9	6.3	+0.05 0	2.5	1.4	0.4	0.05
4	4.1		7	6.9	7.3					
5	5.1		8	7.9	8.3					
6	6.1		9	8.9	9.3					
7	7.1		10	9.9	10.3					
8	8.1		11	10.9	11.3					
9	9.1		12	11.9	12.3					
10	10.1		13	12.9	13.3					
11.2	11.3	0 −0.06	14.2	14.1	14.4	+0.06 0				
12.5	12.6		15.5	15.4	15.7					
13.2	13.3		16.2	16.1	16.4					
14	14.1		17	16.9	17.2					
15	15.1		18	17.9	18.2					
16	16.1		19	18.9	19.2					
17	17.1		20	19.9	20.2					
18	18.1		21	20.9	21.2					
19	19.1		22	21.9	22.2					
20	20.1		23	22.9	23.2					
21.2	21.3		24.2	24.1	24.4					
22.4	22.5	0 −0.08	25.4	25.3	25.5	+0.08 0				
23.6	23.7		26.6	26.5	26.7					
25	25.1		28	27.9	28.1					
26.5	26.6		29.5	29.4	29.6					
28	28.1		31	30.9	31.1					
30	30.1		33	32.9	33.1					
31.5	31.6		34.5	34.4	34.6					
33.5	33.6		36.5	36.4	36.6					
35.5	35.6		38.5	38.4	38.6					


Old JASO F 404 Thickness ø2.4 Series (Static/Dynamic Applications)

Material	JASO	Class 1A	Class 2	Class 3	Class 4C	Class 4D	Class 4E	Class 5	H*
	NOK code	A305	A122	R189	S503	F201	T767	E116	G607


Only the appearance grade differs with the current standards.

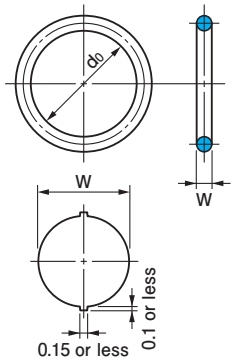

O-Ring Dimensions

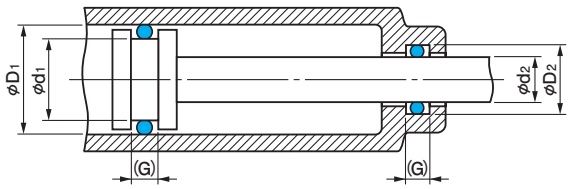

Dynamic Applications

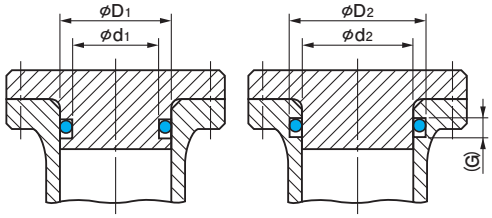


(Extrusion clearance: Refer to Fig.1-3 on page 15.)


For Cylindrical Surface Static Applications


NOK part number									NOK nominal number	O-ring dimensions				
Type Dimension code	Material code									Thickness W	Inside diameter d0	Tolerance of inside diameter 'd0'		
	Class 1A A305	Class 2 A122	Class 3 R189	Class 4C S503	Class 4D F201	Class 4E T767	Class 5 E116	H* G607				A305 (Class 1A) A122 (Class 2) R189 (Class 3)	S503 (Class 4C) T767 (Class 4E) E116 (Class 5)	F201 (Class 4D) G607 (H*)
CO 0008	A	C	K	L	X9	G5	Y1	T0	2010	2.4±0.07	9.8	±0.12	±0.36	±0.24
CO 0010					U3	T1	H1	S0	2011		11.0			
CO 0012					Q0	G2	G1	T0	2012		12.3			
CO 0603					H0	T0	P0	Q0	2013		13.0			
CO 0013					X0	G3	G2	Q1	2014		13.8			
CO 0014					U3	G4	Y1	Z0	2015		14.8			
CO 0015					V9	P3	Z1	X0	2016		15.8			
CO 0608					P5	X0	P0	H0	2017		16.8			
CO 0016					T9	R2	G1	X0	2018		17.8			
CO 0611	A	C	K	L	O2	G2	X0	Z0	2019		18.8	±0.15	±0.45	±0.30
CO 0017					R7	T2	Z1	G0	2020		19.8			
CO 0018					S6	G3	Y1	G0	2021		20.8			
CO 0615					H0	Y0	V0	W0	2022		22.1			
CO 0617					P0	P1	U0	H0	2023		23.3			
CO 0619					U3	H1	Z0	G0	2025		24.7			
CO 0621					N3	H2	W0	R0	2026		26.2			
CO 0623					O3	P2	S1	P1	2028		27.7			
CO 0625					U3	Z0	V0	T0	2030		29.7			
CO 0627					H0	H1	X0	Y0	2031		31.2			
CO 0629					O6	Z0	U0	W0	2033		33.2			
CO 0631					N3	Z0	V0	Y1	2035		35.2			
CO 0632					R0	Y0	T0	U0	2037		37.2			
CO 0633					U3	G2	Z0	G1	2040		39.7			
CO 0634	A	C	K	L	Q4	Z0	V0	W0	2042		42.2	±0.25	±0.75	±0.50
CO 0635					O0	Y0	U0	H0	2045		44.7			
CO 0636					P3	Z0	U0	X0	2047		47.2			
CO 0637					G0	X0	T0	U0	2050		49.7			
CO 0638					X0	H1	Z0	H0	2053		52.6			
CO 0640					U0	H1	Y0	G1	2056		55.6			
CO 0642					N1	U0	S0	T0	2060		59.6			
CO 0644					G0	R0	P0	Q0	2063		62.6			
CO 0646					G0	Z0	S0	P0	2067		66.6			
CO 0648	A	C	K	L	P0	V0	U0	S0	2071		70.6	±0.40	±1.20	±0.80

*Material H is the NOK material code used for H-NBR (hydrogenated nitrile rubber).



For external pressure





For internal pressure

(Note) Chamfering is indicated in accordance with NOK recommended values.

Groove Shapes For Flat Face Static Applications

■ When ordering, please make sure to specify the NOK part number.

Ex.1) If you wish to purchase a part with an inside diameter of 39.7 and thickness of 2.4 made of material Class 1A:
- NOK part number: CO 0633 A
  Type/dimension code — Material code

Ex.2) If you wish to purchase a part with an inside diameter of 39.7 and thickness of 2.4 made of material Class 4D:
- NOK part number: CO 0633 U3
  Type/dimension code — Material code

*Please note that these parts differ with JIS standard parts in terms of appearance specifications.

*JASO standards do not contain specifications on dimension (G). Please use dimension G in place of dimension (G).


(Unit: mm)

Groove dimensions										
d_2 d_3	d_1	Tolerances for d_1, d_2, and d_3	D_1	D_2	D_3	Tolerances for D_1, D_2, and D_3	Dimension G	Dimension H	Dimension R	Max. center misalignment (TIR) of D_1 and d_1 or D_2 and d_2 for dynamic or cylindrical surface static applications
							$G^{+0.25}_{0}$	H±0.05	Max. value	
10	10.2	0 −0.06	14	13.8	14.1	+0.06 0	3.2	1.8	0.4	0.05
11.2	11.4		15.2	15	15.3					
12.5	12.7		16.5	16.3	16.6					
13.2	13.4		17.2	17	17.3					
14	14.2		18	17.8	18.1					
15	15.2		19	18.8	19.1					
16	16.2		20	19.8	20.1					
17	17.2		21	20.8	21.1					
18	18.2		22	21.8	22.1					
19	19.2		23	22.8	23.1					
20	20.2		24	23.8	24.1					
21	21.2		25	24.8	25.1					
22.4	22.6	0 −0.08	26.4	26.2	26.4	+0.08 0				
23.6	23.8		27.6	27.4	27.6					
25	25.2		29	28.8	29					
26.5	26.7		30.5	30.3	30.5					
28	28.2		32	31.8	32					
30	30.2		34	33.8	34					
31.5	31.7		35.5	35.3	35.5					
33.5	33.7		37.5	37.3	37.5					
35.5	35.7		39.5	39.3	39.5					
37.5	37.7		41.5	41.3	41.5					
40	40.2		44	43.8	44					
42.5	42.7		46.5	46.3	46.5					
45	45.2		49	48.8	49					
47.5	47.7		51.5	51.3	51.5					
50	50.2		54	53.8	54					
53	53.2	0 −0.10	57	56.8	57	+0.10 0				
56	56.2		60	59.8	60					
60	60.2		64	63.8	64					
63	63.2		67	66.8	67					
67	67.2		71	70.8	71					
71	71.2		75	74.8	75					


Old JASO F 404 Thickness ø3.1 Series (Static/Dynamic Applications)

Material	JASO	Class 1A	Class 2	Class 3	Class 4C	Class 4D	Class 4E	Class 5	H*
	NOK code	A305	A122	R189	S503	F201	T767	E116	G607


Only the appearance grade differs with the current standards.

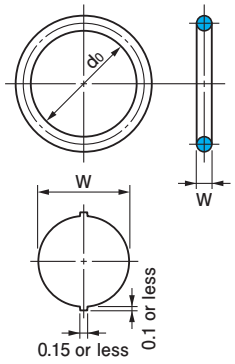

O-Ring Dimensions

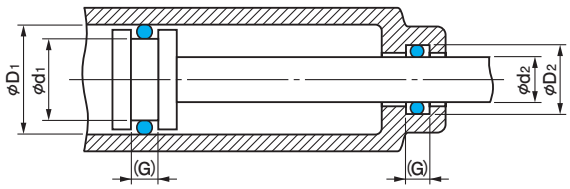

Dynamic Applications

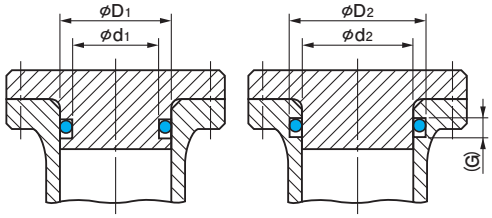


(Extrusion clearance: Refer to Fig.1-3 on page 15.)


For Cylindrical Surface Static Applications


NOK part number									NOK nominal number	O-ring dimensions				
Type Dimension code	Material code									Thickness W	Inside diameter d0	Tolerance of inside diameter 'd0'		
	Class 1A A305	Class 2 A122	Class 3 R189	Class 4C S503	Class 4D F201	Class 4E T767	Class 5 E116	H* G607				A305 (Class 1A) A122 (Class 2) R189 (Class 3)	S503 (Class 4C) T767 (Class 4E) E116 (Class 5)	F201 (Class 4D) G607 (H*)
CO 0200	A	C	K	L	R7	N2	R1	T0	3025 S	3.1±0.10	24.4	±0.15	±0.45	±0.30
CO 0201					U0	X1	S1	G0	3030 S		29.4			
CO 0202					U3	W1	P1	H0	3035 S		34.4			
CO 0203	A	C	K	L	U3	X1	V1	G1	3040 S		39.4	±0.25	±0.75	±0.50
CO 0204					U3	T1	Z0	Y0	3045 S		44.4			
CO 0205					U0	H2	Y1	P1	3050 S		49.4			
CO 0206					R9	U2	X1	W1	3055 S		54.4			
CO 0207					U0	N1	X1	W1	3060 S		59.4			
CO 0208					Q7	G2	Z1	X1	3065 S		64.4			
CO 0209					U3	O2	S1	Z1	3070 S		69.4			
CO 0210	A	C	K	L	U3	Q2	P2	X1	3075 S		74.4	±0.40	±1.20	±0.80
CO 0211					U3	X1	W1	Q1	3080 S		79.4			
CO 0212					Q1	T2	Z1	G1	3085 S		84.4			
CO 0213					U3	S1	G1	H0	3090 S		89.4			
CO 0214					U3	P2	G1	Z0	3095 S		94.4			
CO 0215					U3	G2	S1	Y0	3100 S		99.4			
CO 0216					U3	R1	Q1	G0	3105 S		104.4			
CO 0217					U3	H2	H1	Q1	3110 S		109.4			
CO 0218					U3	Q1	W1	G0	3115 S		114.4			
CO 0219					R0	U1	T1	O1	3120 S		119.4			
CO 0220					U3	Q1	X0	G1	3125 S		124.4			
CO 0221	A	C	K	L	U3	G2	N1	S1	3130 S		129.4	±0.60	±1.80	±1.20
CO 0222					U3	Y1	X1	V1	3135 S		134.4			
CO 0223					X0	S1	X1	H1	3140 S		139.4			
CO 0224					U3	Q1	H1	P1	3145 S		144.4			

*Material H is the NOK material code used for H-NBR (hydrogenated nitrile rubber).



For external pressure





For internal pressure

(Note) Chamfering is indicated in accordance with NOK recommended values.

Groove Shapes For Flat Face Static Applications

■ When ordering, please make sure to specify the NOK part number.

Ex.1) If you wish to purchase a part with an inside diameter of 119.4 and thickness of 3.1 made of material Class 1A:
- NOK part number: CO 0219 A
  Type/dimension code — Material code

Ex.2) If you wish to purchase a part with an inside diameter of 119.4 and thickness of 3.1 made of material Class 4D:
- NOK part number: CO 0219 R0
  Type/dimension code — Material code

*Please note that these parts differ with JIS standard parts in terms of appearance specifications.

*JASO standards do not contain specifications on dimension (G). Please use dimension G in place of dimension (G).


(Unit: mm)

Groove dimensions										
d_2 d_3	d_1	Tolerances for d_1, d_2, and d_3	D_1	D_2	D_3	Tolerances for D_1, D_2, and D_3	Dimension G	Dimension H	Dimension R	Max. center misalignment (TIR) of D_1 and d_1 or D_2 and d_2 for dynamic or cylindrical surface static applications
							$G^{+0.25}_{0}$	H±0.05	Max. value	
25	25.3	0 −0.08	30.3	30.1	30.3	+0.08 0	4.3	2.4	0.5	0.06
30	30.3		35.3	35.1	35.3					
35	35.3		40.3	40.1	40.3					
40	40.3		45.3	45.1	45.3					
45	45.3		50.3	50.1	50.3					
50	50.3	0 −0.10	55.3	55.1	55.3	+0.10 0				
55	55.3		60.3	60.1	60.3					
60	60.3		65.3	65.1	65.3					
65	65.3		70.3	70.1	70.3					
70	70.3		75.3	75.1	75.3					
75	75.3		80.3	80.1	80.3					
80	80.3		85.3	85.1	85.3					
85	85.3		90.3	90.1	90.3					
90	90.3		95.3	95.1	95.3					
95	95.3		100.3	100.1	100.3					
100	100.3		105.3	105.1	105.3					
105	105.3		110.3	110.1	110.3					
110	110.3		115.3	115.1	115.3					
115	115.3		120.3	120.1	120.3					
120	120.3		125.3	125.1	125.3					
125	125.3		130.3	130.1	130.3					
130	130.3		135.3	135.1	135.3					
135	135.3		140.3	140.1	140.3					
140	140.3		145.3	145.1	145.3					
145	145.3		150.3	150.1	150.3					


Old JASO F 404 Thickness ø3.5 Series (Static/Dynamic Applications)

Material	JASO	Class 1A	Class 2	Class 3	Class 4C	Class 4D	Class 4E	Class 5	H*
	NOK code	A305	A122	R189	S503	F201	T767	E116	G607


Only the appearance grade differs with the current standards.

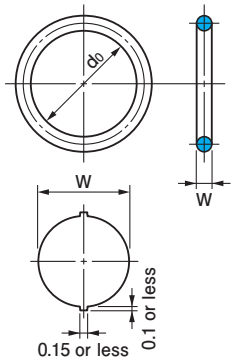

O-Ring Dimensions

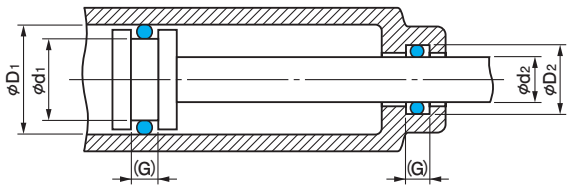

Dynamic Applications

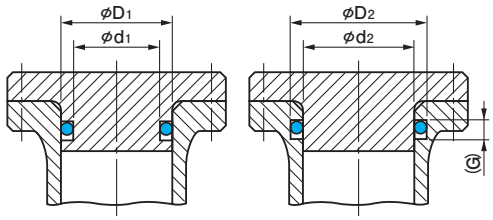


(Extrusion clearance: Refer to Fig.1-3 on page 15.)


For Cylindrical Surface Static Applications


NOK part number									NOK nominal number	O-ring dimensions				
Type Dimension code	Material code									Thickness W	Inside diameter d0	Tolerance of inside diameter 'd0'		
	Class 1A A305	Class 2 A122	Class 3 R189	Class 4C S503	Class 4D F201	Class 4E T767	Class 5 E116	H* G607				A305 (Class 1A) A122 (Class 2) R189 (Class 3)	S503 (Class 4C) T767 (Class 4E) E116 (Class 5)	F201 (Class 4D) G607 (H*)
CO 0021					G0	Y0	R0	S0	3022	3.5±0.10	22.1			
CO 0022					U3	H2	V1	Z0	3024		23.7			
CO 0023					Q0	G2	G1	P1	3025		24.7			
CO 0025					N5	H3	G1	Y0	3026		25.7			
CO 0026					U3	H2	N1	Z0	3028		27.7			
CO 0029	A	C	K	L	S0	G2	G1	G0	3030		29.7	±0.15	±0.45	±0.30
CO 0031					U3	W0	H0	P0	3031		31.2			
CO 0033					R0	G3	N1	W1	3034		33.7			
CO 0035					U3	V0	Q0	R0	3035		35.2			
CO 0037					Q0	H1	U1	V0	3038		37.7			
CO 0038					U3	G2	X0	G0	3039		38.7			
CO 0039					W0	G2	P1	Z0	3040		39.7			
CO 0041					U3	S1	P1	X1	3042		41.7			
CO 0042					U3	G3	G1	G0	3044		43.7			
CO 0043					P4	G2	S1	G1	3045		44.7			
CO 0046					X0	G3	H1	Y1	3048		47.7			
CO 0049					Q6	G2	T1	X1	3050		49.7			
CO 0639	A	C	K	L	H0	R0	P0	Q0	3053		52.6	±0.25	±0.75	±0.50
CO 0641					U3	V0	R0	U0	3056		55.6			
CO 0643					O3	S0	Q0	R0	3060		59.6			
CO 0645					U3	V0	S0	O0	3063		62.6			
CO 0647					G0	U0	R0	S0	3067		66.6			
CO 0649					U3	V0	Q0	R0	3071		70.6			
CO 0650					G0	W0	U0	V0	3075		74.6			
CO 0651					H0	G1	W0	Y0	3080		79.6			
CO 0652					O2	U0	S0	T0	3085		84.6			
CO 0653					U3	W0	U0	V0	3090		89.6			
CO 0654	A	C	K	L	Q0	U0	S0	T0	3095		94.6	±0.40	±1.20	±0.80
CO 0655					G0	T0	R0	S0	3100		99.6			
CO 0656					G0	T0	P0	Q0	3106		105.6			
CO 0657					G0	Q0	N0	P0	3112		111.6			
CO 0658					N0	P0	O0	G0	3118		117.6			
CO 0659					G0	R0	P0	Q0	3125		124.6			
CO 0660	A	C	K	L	H0	S0	P0	Q0	3132		131.6	±0.60	±1.80	±1.20
CO 0661					H0	T0	R0	S0	3140		139.6			
CO 0662					H0	S0	Q0	R0	3150		149.6			

*Material H is the NOK material code used for H-NBR (hydrogenated nitrile rubber).



For external pressure





For internal pressure

(Note) Chamfering is indicated in accordance with NOK recommended values.

Groove Shapes For Flat Face Static Applications

■ When ordering, please make sure to specify the NOK part number.

Ex.1) If you wish to purchase a part with an inside diameter of 41.7 and thickness of 3.5 made of material Class 1A:
- NOK part number: CO 0041 A
  Type/dimension code — Material code

Ex.2) If you wish to purchase a part with an inside diameter of 41.7 and thickness of 3.5 made of material Class 4D:
- NOK part number: CO 0041 U3
  Type/dimension code — Material code

*Please note that these parts differ with JIS standard parts in terms of appearance specifications.

*JASO standards do not contain specifications on dimension (G). Please use dimension G in place of dimension (G).


(Unit: mm)

Groove dimensions										
d_2 d_3	d_1	Tolerances for d_1, d_2, and d_3	D_1	D_2	D_3	Tolerances for D_1, D_2, and D_3	Dimension G	Dimension H	Dimension R	Max. center misalignment (TIR) of D_1 and d_1 or D_2 and d_2 for dynamic or cylindrical surface static applications
							$G^{+0.25}_{0}$	H±0.05	Max. value	
22.4	22.7	0 −0.08	28.4	28.1	28.4	+0.08 0	4.7	2.7	0.7	0.08
24	24.3		30	29.7	30					
25	25.3		31	30.7	31					
26	26.3		32	31.7	32					
28	28.3		34	33.7	34					
30	30.3		36	35.7	36					
31.5	31.8		37.5	37.2	37.5					
34	34.3		40	39.7	40					
35.5	35.8		41.5	41.2	41.5					
38	38.3		44	43.7	44					
39	39.3		45	44.7	45					
40	40.3		46	45.7	46					
42	42.3		48	47.7	48					
44	44.3		50	49.7	50					
45	45.3		51	50.7	51					
48	48.3		54	53.7	54					
50	50.3		56	55.7	56					
53	53.3	0 −0.10	59	58.7	59	+0.10 0				
56	56.3		62	61.7	62					
60	60.3		66	65.7	66					
63	63.3		69	68.7	69					
67	67.3		73	72.7	73					
71	71.3		77	76.7	77					
75	75.3		81	80.7	81					
80	80.3		86	85.7	86					
85	85.3		91	90.7	91					
90	90.3		96	95.7	96					
95	95.3		101	100.7	101					
100	100.3		106	105.7	106					
106	106.3		112	111.7	112					
112	112.3		118	117.7	118					
118	118.3		124	123.7	124					
125	125.3		131	130.7	131					
132	132.3		138	137.7	138					
140	140.3		146	145.7	146					
150	150.3		156	155.7	156					

ISO Equivalent General Industrial Series (Static Applications)

Material	JIS	NBR-70-1
	Old JIS*	Class 1A
	NOK code	A305

*Old JIS: JIS B 2401-2005

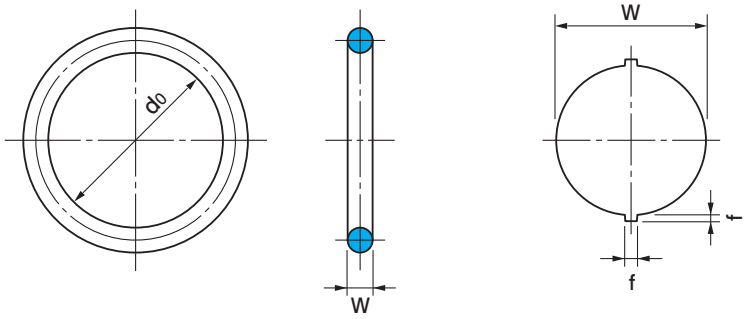

(Unit: mm)

NOK part number	(Old) ISO nominal number	O-ring dimensions				
		Thickness W		Inside diameter d0		Burr dimension f
CO 7200 A	A 0018 G	1.8	±0.08	1.80	±0.13	0.1 or less
CO 7201 A	A 0020 G			2.00		
CO 7202 A	A 0022 G			2.24		
CO 7203 A	A 0025 G			2.50		
CO 7204 A	A 0028 G			2.80	±0.14	
CO 7205 A	A 0031 G			3.15		
CO 7206 A	A 0035 G			3.55		
CO 7207 A	A 0037 G			3.75		
CO 7208 A	A 0040 G			4.00		
CO 1012 A	A 0045 G			4.50		
CO 7209 A	A 0048 G			4.87	±0.15	
CO 7210 A	A 0050 G			5.00		
CO 7211 A	A 0051 G			5.15		
CO 7212 A	A 0053 G			5.30		
CO 6868 A	A 0056 G			5.60		
CO 3026 A	A 0060 G			6.00		
CO 7213 A	A 0063 G			6.30		
CO 7038 A	A 0067 G			6.70	±0.16	
CO 7214 A	A 0069 G			6.90		
CO 7215 A	A 0071 G			7.10		
CO 7216 A	A 0075 G			7.50		
CO 7217 A	A 0080 G			8.00		
CO 7218 A	A 0085 G			8.50		
CO 7219 A	A 0087 G			8.75	±0.17	
CO 1061 A	A 0090 G			9.00		
CO 7221 A	A 0095 G			9.50		
CO 7222 A	A 0100 G			10.0		
CO 7223 A	A 0106 G			10.6	±0.18	
CO 7224 A	A 0112 G			11.2		
CO 1109 A	A 0118 G			11.8	±0.19	
CO 7225 A	A 0125 G			12.5		
CO 7226 A	A 0132 G			13.2		
CO 3441 A	A 0140 G			14.0		
CO 6822 A	A 0150 G			15.0	±0.20	
CO 6861 A	A 0160 G			16.0		
CO 7227 A	A 0170 G			17.0	±0.21	
CO 7228 A	B 0140 G	2.65	±0.09	14.0	±0.19	0.12 or less
CO 7229 A	B 0150 G			15.0	±0.20	
CO 7230 A	B 0160 G			16.0		
CO 7231 A	B 0170 G			17.0	±0.21	
CO 7232 A	B 0180 G			18.0		
CO 7233 A	B 0190 G			19.0	±0.22	
CO 7234 A	B 0200 G			20.0		
CO 7235 A	B 0212 G			21.2	±0.23	
CO 7236 A	B 0224 G			22.4	±0.24	
CO 7237 A	B 0236 G			23.6		
CO 7238 A	B 0250 G			25.0	±0.25	
CO 7239 A	B 0258 G			25.8	±0.26	
CO 7240 A	B 0265 G			26.5		
CO 7241 A	B 0280 G			28.0	±0.28	

NOK part number	(Old) ISO nominal number	O-ring dimensions				
		Thickness W		Inside diameter d0		Burr dimension f
CO 7242 A	B 0300 G	2.65	±0.09	30.0	±0.29	0.12 or less
CO 7243 A	B 0315 G			31.5	±0.31	
CO 7244 A	B 0325 G			32.5	±0.32	
CO 7245 A	B 0335 G			33.5		
CO 7246 A	B 0345 G			34.5	±0.33	
CO 7247 A	B 0355 G			35.5	±0.34	
CO 7248 A	B 0365 G			36.5	±0.35	
CO 7249 A	B 0375 G			37.5	±0.36	
CO 7250 A	B 0387 G			38.7	±0.37	
CO 7251 A	C 0180 G	3.55	±0.10	18.0	±0.21	0.14 or less
CO 7252 A	C 0190 G			19.0	±0.22	
CO 7253 A	C 0200 G			20.0		
CO 7254 A	C 0212 G			21.2	±0.23	
CO 7255 A	C 0224 G			22.4	±0.24	
CO 7256 A	C 0236 G			23.6		
CO 7257 A	C 0250 G			25.0	±0.25	
CO 7258 A	C 0258 G			25.8	±0.26	
CO 7259 A	C 0265 G			26.5		
CO 7260 A	C 0280 G			28.0	±0.28	
CO 7261 A	C 0300 G			30.0	±0.29	
CO 7262 A	C 0315 G			31.5	±0.31	
CO 7263 A	C 0325 G			32.5	±0.32	
CO 7264 A	C 0335 G			33.5		
CO 7265 A	C 0345 G			34.5	±0.33	
CO 7266 A	C 0355 G			35.5	±0.34	
CO 7267 A	C 0365 G			36.5	±0.35	
CO 7268 A	C 0375 G			37.5	±0.36	
CO 7269 A	C 0387 G			38.7	±0.37	
CO 7270 A	C 0400 G			40.0	±0.38	
CO 7271 A	C 0412 G			41.2	±0.39	
CO 7272 A	C 0425 G			42.5	±0.40	
CO 7273 A	C 0437 G			43.7	±0.41	
CO 7274 A	C 0450 G			45.0	±0.42	
CO 7275 A	C 0462 G			46.2	±0.43	
CO 7276 A	C 0475 G			47.5	±0.44	
CO 7277 A	C 0487 G			48.7	±0.45	
CO 7278 A	C 0500 G			50.0	±0.46	
CO 7279 A	C 0515 G			51.5	±0.47	
CO 7280 A	C 0530 G			53.0	±0.48	
CO 7281 A	C 0545 G			54.5	±0.50	
CO 7282 A	C 0560 G			56.0	±0.51	
CO 7283 A	C 0580 G			58.0	±0.52	
CO 7284 A	C 0600 G			60.0	±0.54	
CO 7285 A	C 0615 G			61.5	±0.55	
CO 7286 A	C 0630 G			63.0	±0.56	
CO 7287 A	C 0650 G			65.0	±0.58	
CO 7288 A	C 0670 G			67.0	±0.59	
CO 7289 A	C 0690 G			69.0	±0.61	
CO 7290 A	C 0710 G			71.0	±0.63	
CO 7291 A	C 0730 G			73.0	±0.64	

■ When ordering, please make sure to specify both the ① (Old) ISO nominal number and ② NOK part number.
Ex.) If you wish to purchase a part with an inside diameter of 31.5 and thickness of 2.65 made of material NBR-70-1:
- (Old) ISO nominal number: **B 0315 G**
- NOK part number: **CO 7243 A**

*Although the products meet the specifications of the JIS standard ISO Series, nominal numbers correspond with those for the Old JIS standard (JIS B 2401: 1996) ISO Series.

(Unit: mm)


NOK part number	(Old) ISO nominal number	O-ring dimensions				
		Thickness W		Inside diameter do		Burr dimension f
CO 7292 A	C 0750 G	3.55	±0.10	75.0	±0.66	0.14 or less
CO 7293 A	C 0775 G			77.5	±0.67	
CO 7294 A	C 0800 G			80.0	±0.69	
CO 7295 A	C 0825 G			82.5	±0.71	
CO 7296 A	C 0850 G			85.0	±0.73	
CO 7297 A	C 0875 G			87.5	±0.75	
CO 7298 A	C 0900 G			90.0	±0.77	
CO 7299 A	C 0925 G			92.5	±0.79	
CO 7300 A	C 0950 G			95.0	±0.81	
CO 7301 A	C 0975 G			97.5	±0.83	
CO 7302 A	C 1000 G			100	±0.84	
CO 7303 A	C 1030 G			103	±0.87	
CO 7304 A	C 1060 G			106	±0.89	
CO 7305 A	C 1090 G			109	±0.91	
CO 7306 A	C 1120 G			112	±0.93	
CO 7307 A	C 1150 G			115	±0.95	
CO 7308 A	C 1180 G			118	±0.97	
CO 7309 A	C 1220 G			122	±1.00	
CO 7310 A	C 1250 G			125	±1.03	
CO 7311 A	C 1280 G			128	±1.05	
CO 7312 A	C 1320 G			132	±1.08	
CO 7313 A	C 1360 G			136	±1.10	
CO 7314 A	C 1400 G			140	±1.13	
CO 7315 A	C 1450 G			145	±1.17	
CO 7316 A	C 1500 G			150	±1.20	
CO 7317 A	C 1550 G			155	±1.24	
CO 7318 A	C 1600 G			160	±1.27	
CO 7319 A	C 1650 G			165	±1.31	
CO 7320 A	C 1700 G			170	±1.34	
CO 7321 A	C 1750 G			175	±1.38	
CO 7322 A	C 1800 G			180	±1.41	
CO 7323 A	C 1850 G			185	±1.44	
CO 7324 A	C 1900 G			190	±1.48	
CO 7325 A	C 1950 G			195	±1.51	
CO 7326 A	C 2000 G			200	±1.55	
CO 7327 A	D 0400 G	5.30	±0.13	40.0	±0.38	0.16 or less
CO 7328 A	D 0412 G			41.2	±0.39	
CO 7329 A	D 0425 G			42.5	±0.40	
CO 7330 A	D 0437 G			43.7	±0.41	
CO 4643 A	D 0450 G			45.0	±0.42	
CO 7331 A	D 0462 G			46.2	±0.43	
CO 7332 A	D 0475 G			47.5	±0.44	
CO 7333 A	D 0487 G			48.7	±0.45	
CO 7334 A	D 0500 G			50.0	±0.46	
CO 7335 A	D 0515 G			51.5	±0.47	
CO 7336 A	D 0530 G			53.0	±0.48	
CO 7337 A	D 0545 G			54.5	±0.50	
CO 7338 A	D 0560 G			56.0	±0.51	
CO 7339 A	D 0580 G			58.0	±0.52	
CO 7340 A	D 0600 G			60.0	±0.54	

NOK part number	(Old) ISO nominal number	O-ring dimensions				
		Thickness W		Inside diameter do		Burr dimension f
CO 7341 A	D 0615 G	5.30	±0.13	61.5	±0.55	0.16 or less
CO 7342 A	D 0630 G			63.0	±0.56	
CO 7343 A	D 0650 G			65.0	±0.58	
CO 7344 A	D 0670 G			67.0	±0.59	
CO 7345 A	D 0690 G			69.0	±0.61	
CO 7346 A	D 0710 G			71.0	±0.63	
CO 7347 A	D 0730 G			73.0	±0.64	
CO 7348 A	D 0750 G			75.0	±0.66	
CO 7349 A	D 0775 G			77.5	±0.67	
CO 7350 A	D 0800 G			80.0	±0.69	
CO 7351 A	D 0825 G			82.5	±0.71	
CO 7352 A	D 0850 G			85.0	±0.73	
CO 7353 A	D 0875 G			87.5	±0.75	
CO 7354 A	D 0900 G			90.0	±0.77	
CO 7355 A	D 0925 G			92.5	±0.79	
CO 7356 A	D 0950 G			95.0	±0.81	
CO 7357 A	D 0975 G			97.5	±0.83	
CO 7358 A	D 1000 G			100	±0.84	
CO 7359 A	D 1030 G			103	±0.87	
CO 7360 A	D 1060 G			106	±0.89	
CO 7361 A	D 1090 G			109	±0.91	
CO 7362 A	D 1120 G			112	±0.93	
CO 7363 A	D 1150 G			115	±0.95	
CO 7364 A	D 1180 G			118	±0.97	
CO 7365 A	D 1220 G			122	±1.00	
CO 7366 A	D 1250 G			125	±1.03	
CO 7367 A	D 1280 G			128	±1.05	
CO 7368 A	D 1320 G			132	±1.08	
CO 7369 A	D 1360 G			136	±1.10	
CO 7370 A	D 1400 G			140	±1.13	
CO 7371 A	D 1450 G			145	±1.17	
CO 7372 A	D 1500 G			150	±1.20	
CO 7373 A	D 1550 G			155	±1.24	
CO 7374 A	D 1600 G			160	±1.27	
CO 7375 A	D 1650 G			165	±1.31	
CO 7376 A	D 1700 G			170	±1.34	
CO 7377 A	D 1750 G			175	±1.38	
CO 7378 A	D 1800 G			180	±1.41	
CO 7379 A	D 1850 G			185	±1.44	
CO 7380 A	D 1900 G			190	±1.48	
CO 7381 A	D 1950 G			195	±1.51	
CO 7382 A	D 2000 G			200	±1.55	
CO 7383 A	D 2060 G			206	±1.59	
CO 7384 A	D 2120 G			212	±1.63	
CO 7385 A	D 2180 G			218	±1.67	
CO 7386 A	D 2240 G			224	±1.71	
CO 7387 A	D 2300 G			230	±1.75	
CO 7388 A	D 2360 G			236	±1.79	
CO 7389 A	D 2430 G			243	±1.83	
CO 7390 A	D 2500 G			250	±1.88	

ISO Equivalent General Industrial Series (Static Applications)

Material	JIS	NBR-70-1
	Old JIS*	Class 1A
	NOK code	A305

*Old JIS: JIS B 2401-2005

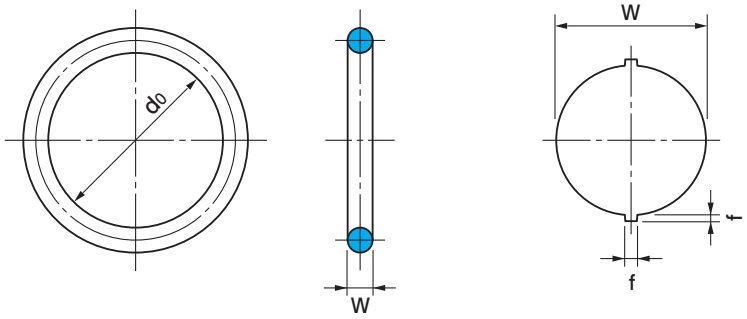

(Unit: mm)

NOK part number	(Old) ISO nominal number	O-ring dimensions				
		Thickness W		Inside diameter do		Burr dimension f
CO 7391 A	D 2580 G	5.30	±0.13	258	±1.93	0.16 or less
CO 7392 A	D 2650 G			265	±1.98	
CO 7393 A	D 2720 G			272	±2.02	
CO 7394 A	D 2800 G			280	±2.08	
CO 7395 A	D 2900 G			290	±2.14	
CO 7396 A	D 3000 G			300	±2.21	
CO 7397 A	D 3070 G			307	±2.25	
CO 7398 A	D 3150 G			315	±2.30	
CO 7399 A	D 3250 G			325	±2.37	
CO 7400 A	D 3350 G			335	±2.43	
CO 7401 A	D 3450 G			345	±2.49	
CO 7402 A	D 3550 G			355	±2.56	
CO 7403 A	D 3650 G			365	±2.62	
CO 7404 A	D 3750 G			375	±2.68	
CO 7405 A	D 3870 G			387	±2.76	
CO 7406 A	D 4000 G			400	±2.84	
CO 7407 A	E 1090 G	7.00	±0.15	109	±0.91	0.18 or less
CO 7408 A	E 1120 G			112	±0.93	
CO 7409 A	E 1150 G			115	±0.95	
CO 7410 A	E 1180 G			118	±0.97	
CO 7411 A	E 1220 G			122	±1.00	
CO 7412 A	E 1250 G			125	±1.03	
CO 7413 A	E 1280 G			128	±1.05	
CO 7414 A	E 1320 G			132	±1.08	
CO 7415 A	E 1360 G			136	±1.10	
CO 7416 A	E 1400 G			140	±1.13	
CO 7417 A	E 1450 G			145	±1.17	
CO 7418 A	E 1500 G			150	±1.20	
CO 7419 A	E 1550 G			155	±1.24	
CO 7420 A	E 1600 G			160	±1.27	
CO 7421 A	E 1650 G			165	±1.31	
CO 7422 A	E 1700 G			170	±1.34	
CO 7423 A	E 1750 G			175	±1.38	
CO 7424 A	E 1800 G			180	±1.41	
CO 7425 A	E 1850 G			185	±1.44	
CO 7426 A	E 1900 G			190	±1.48	
CO 7427 A	E 1950 G			195	±1.51	
CO 7428 A	E 2000 G			200	±1.55	
CO 7429 A	E 2060 G			206	±1.59	
CO 7430 A	E 2120 G			212	±1.63	
CO 7431 A	E 2180 G			218	±1.67	
CO 7432 A	E 2240 G			224	±1.71	
CO 7433 A	E 2300 G			230	±1.75	
CO 7434 A	E 2360 G			236	±1.79	
CO 7435 A	E 2430 G			243	±1.83	
CO 7436 A	E 2500 G			250	±1.88	
CO 7437 A	E 2580 G			258	±1.93	
CO 7438 A	E 2650 G			265	±1.98	
CO 7439 A	E 2720 G			272	±2.02	
CO 7440 A	E 2800 G			280	±2.08	

NOK part number	(Old) ISO nominal number	O-ring dimensions				
		Thickness W		Inside diameter do		Burr dimension f
CO 7441 A	E 2900 G	7.00	±0.15	290	±2.14	0.18 or less
CO 7442 A	E 3000 G			300	±2.21	
CO 7443 A	E 3070 G			307	±2.25	
CO 7444 A	E 3150 G			315	±2.30	
CO 7445 A	E 3250 G			325	±2.37	
CO 7446 A	E 3350 G			335	±2.43	
CO 7447 A	E 3450 G			345	±2.49	
CO 7448 A	E 3550 G			355	±2.56	
CO 7449 A	E 3650 G			365	±2.63	
CO 7450 A	E 3750 G			375	±2.68	
CO 7451 A	E 3870 G			387	±2.76	
CO 7452 A	E 4000 G			400	±2.84	
CO 7453 A	E 4120 G			412	±2.91	
CO 7454 A	E 4250 G			425	±2.99	
CO 7455 A	E 4370 G			437	±3.07	
CO 7456 A	E 4500 G			450	±3.15	
CO 6711 A	E 4620 G			462	±3.22	
CO 7457 A	E 4750 G			475	±3.30	
CO 7458 A	E 4870 G			487	±3.37	
CO 7459 A	E 5000 G			500	±3.45	
CO 7460 A	E 5150 G			515	±3.54	
CO 7461 A	E 5300 G			530	±3.63	
CO 7462 A	E 5450 G			545	±3.72	
CO 7463 A	E 5600 G			560	±3.81	
CO 7464 A	E 5800 G			580	±3.93	
CO 7465 A	E 6000 G			600	±4.05	
CO 7466 A	E 6150 G			615	±4.13	
CO 7467 A	E 6300 G			630	±4.22	
CO 7468 A	E 6500 G			650	±4.34	
CO 7469 A	E 6700 G			670	±4.46	


■ When ordering, please make sure to specify both the ① (Old) ISO nominal number and ② NOK part number.

Ex.) If you wish to purchase a part with an inside diameter of 31.5 and thickness of 2.65 made of material NBR-70-1:
- (Old) ISO nominal number: B 0315 G
- NOK part number: CO 7243 A

*Although the products meet the specifications of the JIS standard ISO Series, nominal numbers correspond with those for the Old JIS standard (JIS B 2401: 1996) ISO Series.

NOK WEX Series (O-Ring series for water applications: Static/Dynamic Applications)

Material	Material code	7W	5W	FW	FBW
	NOK code	E700	E575	FP29	FP739
	Hue	Black	Violet	Black	Brown

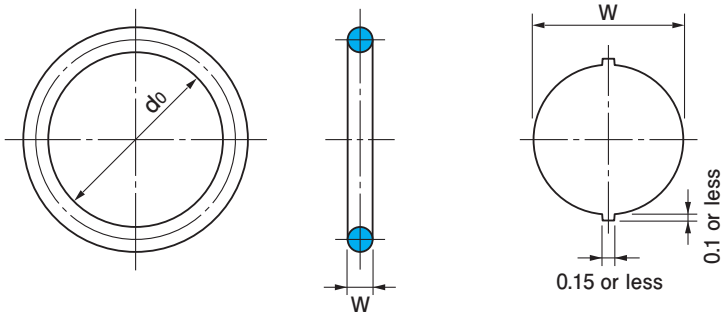


(Unit: mm)

NOK part number					NOK nominal number	O-ring dimensions			
Type Dimension code	7W E700	5W E575	FW FP29	FBW FP739	← Take the material code to the left and substitute it for the "□"	Thickness W	Inside diameter d0	Tolerance of inside diameter 'd0' E700 E575	Tolerance of inside diameter 'd0' FP29 FP739
CO 0000	Z1	O2	P3	CO 60000 H0	□ P 3	1.9±0.07	2.8	±0.36	±0.24
CO 0001	N1	N2	X2	CO 60001 F0	□ P 4		3.8		
CO 0002	G1	U2	G5	CO 60002 E0	□ P 5		4.8		
CO 0003	R3	H3	S3	CO 60003 G0	□ P 6		5.8		
CO 0004	Y3	G5	N4	CO 60004 F0	□ P 7		6.8		
CO 0005	Z4	Z2	G7	CO 60005 H0	□ P 8		7.8		
CO 0006	V2	H3	N3	CO 60006 E0	□ P 9		8.8		
CO 0007	O4	G5	R3	CO 60007 J0	□ P10		9.8		
CO 0008	H4	Z5	H6	CO 60008 F0	□ P10A	2.4±0.07	9.8		
CO 0009	Y1	H3	V2	CO 60009 D0	□ P11		10.8		
CO 0011	Y1	Z4	V2	CO 60011 E0	□ P12		11.8		
CO 0012	G3	H2	H4	CO 60012 G0	□ P12.5		12.3		
CO 0013	Z3	S2	N3	CO 60013 G0	□ P14		13.8		
CO 0014	H4	H3	Z4	CO 60014 F0	□ P15		14.8		
CO 0015	T2	G3	V1	CO 60015 I0	□ P16		15.8		
CO 0016	N2	P3	Z3	CO 60016 M0	□ P18		17.8		
CO 0017	X2	G4	O2	CO 60017 I0	□ P20		19.8	±0.45	±0.30

■Note:

1. The WEX Series is a series that has been designed for applications that use water, such as cogeneration systems, and they are made in compliance with the JIS B 2401-1 P Series using NOK's 4 recommended materials.
2. The materials and their characteristics are shown below.

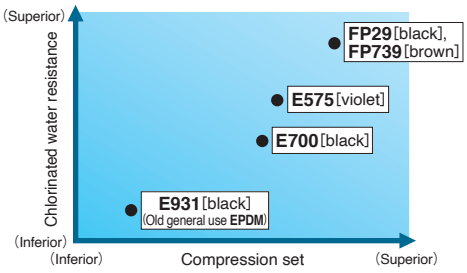


3. Although they are designed with dimensions that conform with the JIS B 2401-1 P Series, since they are special rubber materials, the tolerances are set to NOK's standard tolerances.
4. Please refer to page 23 for details on groove dimensions.
5. This series is produced using processes that aim to meet the requirements of the Food Sanitation Act.
6. Except for in special cases, NOK recommends FP29 for high-temperature, long-term usage.

■When ordering, please make sure to specify both the ① NOK nominal number and ② NOK part number.

Ex.1) If you wish to purchase a part with an inside diameter of 7.8 and thickness of 1.9 made of NOK code FP29:
- NOK nominal number: **FW P8**
- NOK part number: **CO 0005 G7**


Ex.2) If you wish to purchase a part with an inside diameter of 7.8 and thickness of 1.9 made of NOK code E700:
- NOK nominal number: **7W P8**
- NOK part number: **CO 0005 Z4**


■ Estimated time to reach 80% compression set

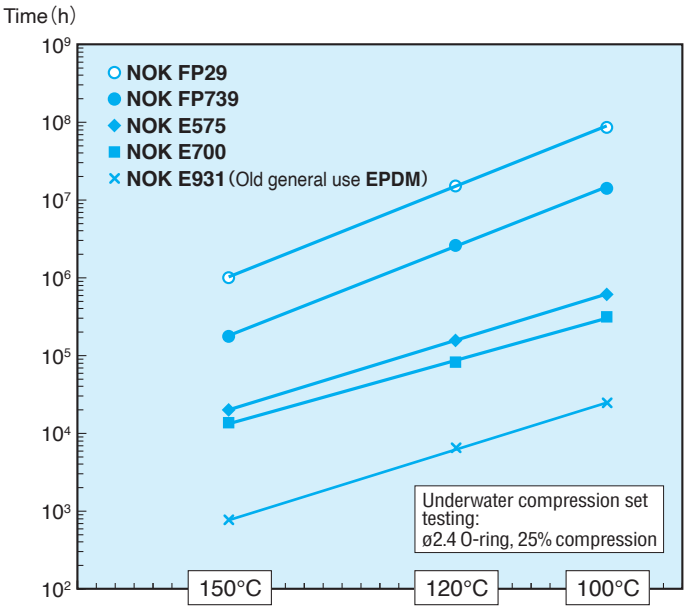

NOK BE Series (O-Ring series Biomass: Static/Dynamic Applications)

Material	Material code	BE
	NOK code	E3040
	Hue	Black





バイオマス
No.240090

Rubber material E 3040 is a Biomass Mark certified product*1

(Unit: mm)

NOK part number		NOK nominal number	O-ring dimensions		
Type Dimension code	BE E3040		Thickness W	Inside diameter d_0	Tolerance of inside diameter 'd_0'
CO 60000	L0	BEP 3	1.9±0.07	2.8	±0.36
CO 60001	O0	BEP 4		3.8	
CO 60002	K0	BEP 5		4.8	
CO 60003	O0	BEP 6		5.8	
CO 60004	Q0	BEP 7		6.8	
CO 60005	W0	BEP 8		7.8	
CO 60006	P0	BEP 9		8.8	
CO 60007	X0	BEP 10		9.8	
CO 60008	P0	BEP 10A	2.4±0.07	9.8	
CO 60009	K0	BEP 11		10.8	
CO 60011	N0	BEP 12		11.8	
CO 60012	O0	BEP 12.5		12.3	
CO 60013	V0	BEP 14		13.8	
CO 60014	Q0	BEP 15		14.8	
CO 60015	T0	BEP 16		15.8	
CO 60016	X0	BEP 18		17.8	
CO 60017	X0	BEP 20		19.8	±0.45

■Note:

1. The BE Series is a series of EPDM O rings made from biomass-derived raw materials in accordance with JIS B 2401 -1 P Series.
   It reduces greenhouse gas emissions and contributes to achieving carbon neutrality.
2. Materials that use 30% biomass-derived raw materials (biomass level).*1

   Environmental indicators(biomass level).

$$\text{Biomass level: } \frac{\text{Weight of biomass used in the priduct}}{\text{Product weight}} \times 100(\%)$$


3. The dimensions are set according to JIS B 2401 -1 P series, but because it is a special rubber material, the tolerances are set to our company standard tolerances.
4. See page 23 for the groove dimensions.
5. The material properties are equivalent to those of E 116 and E 700. See page 13 for details.

■When ordering, please make sure to specify both the ① NOK nominal number and ② NOK part number.

Ex.) If you wish to purchase a part with an inside diameter of 7.8 and thickness of 1.9:
- NOK nominal number: **BEP8**
- NOK part number: **CO 60005 W0**

*1: Conform to the Biomass Mark certification standards issued by the Japan Organic Recycling Association


■ Estimation of CO_2 emissions*2

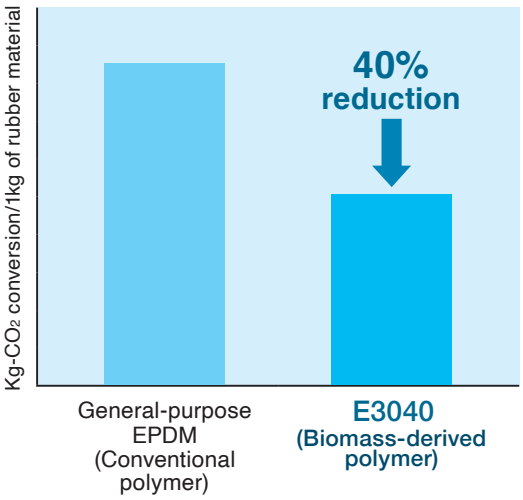


*2: CO_2 emissions from manufacturing raw materials (polymers)

NOK Iron Rubber P, G Series (Static/Dynamic Applications)


Material (NOK code)	U801

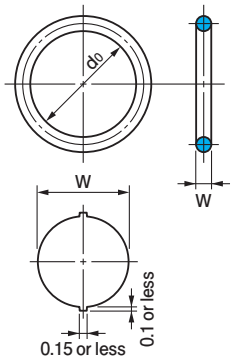

O-Ring Dimensions

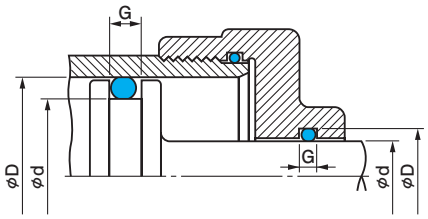

For Dynamic Applications

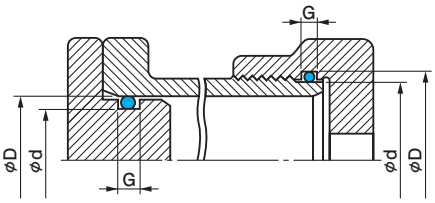


For Cylindrical Surface Static Applications

P Series

(Unit: mm)

NOK part number		NOK nominal number	O-ring dimensions			Groove dimensions								
Type Dimension code	Material code		Thickness W	Tolerance of inside diameter 'd0'		Dimension d		Dimension D		Dimension G (tolerance $^{+0.25}_{0}$)			Dimension H	Dimension R
	U801			d0	Tolerance	d	Tolerance	D	Tolerance	No backup rings	Backup ring on one side	Backup rings on both sides	H±0.05	Max. value
FR 0318	W	P 3	1.9±0.08	2.8	±0.16	3	$^{0}_{-0.05}$	6	$^{+0.05}_{0}$	2.5	3.9	5.4	1.4	0.4
FR 0383		P 4		3.8		4		7						
FR 0457		P 5		4.8	±0.18	5		8						
FR 0458		P 6		5.8		6		9						
FR 0278		P 7		6.8	±0.19	7		10						
FR 0350		P 8		7.8		8		11						
FR 0489		P 9		8.8	±0.20	9		12						
FR 0329		P 10		9.8		10		13						
FR 0246	W	P 10A	2.4±0.09	9.8	±0.20	10	$^{0}_{-0.06}$	14	$^{+0.06}_{0}$	3.2	4.4	6.0	1.8	0.4
FR 0460		P 11		10.8	±0.21	11		15						
FR 0337		P 11.2		11.0		11.2		15.2						
FR 0461		P 12		11.8	±0.22	12		16						
FR 0462		P 12.5		12.3		12.5		16.5						
FR 0307		P 14		13.8		14		18						
FR 0463		P 15		14.8	±0.24	15		19						
FR 0281		P 16		15.8		16		20						
FR 0282		P 18		17.8	±0.25	18		22						
FR 0283		P 20		19.8	±0.26	20		24						
FR 0464		P 21		20.8	±0.27	21		25						
FR 0386		P 22		21.8	±0.28	22		26						
FR 0384	W	P 22A	3.5±0.1	21.7		22	$^{0}_{-0.08}$	28	$^{+0.08}_{0}$	4.7	6.0	7.8	2.7	0.7
FR 0310		P 22.4		22.1	±0.28	22.4		28.4						
FR 0092		P 24		23.7		24		30						
FR 0250		P 25		24.7	±0.30	25		31						
FR 0465		P 25.5		25.2		25.5		31.5						
FR 0364		P 26		25.7	±0.31	26		32						
FR 0380		P 28		27.7	±0.33	28		34						
FR 0375		P 29		28.7		29		35						
FR 0466		P 29.5		29.2	±0.34	29.5		35.5						
FR 0113		P 30		29.7		30		36						
FR 0467		P 31		30.7	±0.36	31		37						
FR 0468		P 31.5		31.2	±0.37	31.5		37.5						
FR 0311		P 32		31.7		32		38						
FR 0361		P 34		33.7	±0.39	34		40						
FR 0133		P 35		34.7	±0.40	35		41						
FR 0469		P 35.5		35.2		35.5		41.5						
FR 0138		P 36		35.7		36		42						
FR 0378		P 38		37.7		38		44						
FR 0470		P 39		38.7	±0.44	39		45						
FR 0363		P 40		39.7		40		46						
FR 0471		P 41		40.7	±0.45	41		47						
FR 0158		P 42		41.7	±0.46	42		48						
FR 0385		P 44		43.7		44		50						
FR 0377		P 45		44.7	±0.49	45		51						
FR 0472		P 46		45.7	±0.50	46		52						
FR 0379		P 48		47.7	±0.52	48		54						
FR 0473		P 49		48.7	±0.54	49		55						
FR 0474		P 50		49.7		50		56						

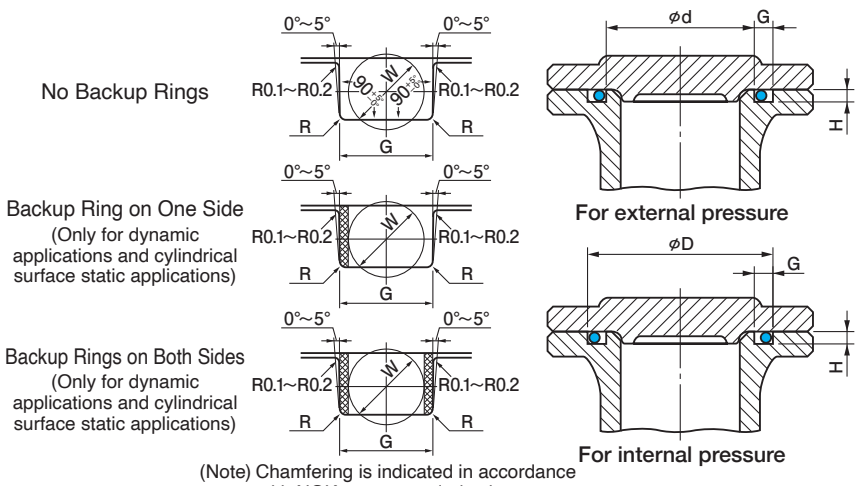

(Note) Chamfering is indicated in accordance with NOK recommended values.

Groove Shapes For Flat Face Static Applications

■When ordering, please make sure to specify the NOK part number.

Ex.) If you wish to purchase a part with an inside diameter of 25.7 and thickness of 3.5 made of material U801:

・NOK part number: FR 0364 W

Type/dimension code — Material code

G Series

(Unit: mm)

NOK part number		NOK nominal number	O-ring dimensions			Groove dimensions								
Type Dimension code	Material code U801		Thickness W	Tolerance of inside diameter 'd0'		Dimension d		Dimension D		Dimension G (tolerance $^{+0.25}_{0}$)			Dimension H	Dimension R
				d0	Tolerance	d	Tolerance	D	Tolerance	No backup rings	Backup ring on one side	Backup rings on both sides	H±0.05	Max. value
FR 0285	W	G 25	3.1±0.1	24.4	±0.30	25	$^{0}_{-0.1}$	30	$^{+0.1}_{0}$	4.1	5.6	7.3	2.4	0.7
FR 0286		G 30		29.4	±0.34	30		35						
FR 0475		G 35		34.4	±0.39	35		40						
FR 0149		G 40		39.4	±0.44	40		45						
FR 0476		G 45		44.4	±0.49	45		50						
FR 0477		G 50		49.4	±0.54	50		55						

Iron Rubber O-rings are products designed to be compatible with JIS B 2401-1 (P, G series).

● Iron Rubber characteristics

1. High tensile strength
2. High tearing strength
3. High elasticity
4. Load bearing performance
5. Wear resistance

These 5 characteristics represent the most exceptional qualities among the numerous superior properties of this material. This pioneering material can be applied in fields where conventional rubber, plastic, metal, and other industrial materials could not be used, thereby opening up possibilities for new applications.


● Other characteristics

Oil, chemical, and water resistance:
Having superior oil resistance equivalent to that of nitrile rubber.
Also appropriate for use with other substances, such as fuels, ethers, edible oils, and salts. Vastly superior in terms of water resistance when compared to general polyurethane.

● Ozone resistance


Highly superior resistance that is equivalent to fluororubber and silicone rubber.

● Tensile strength - Young's modulus/hardness

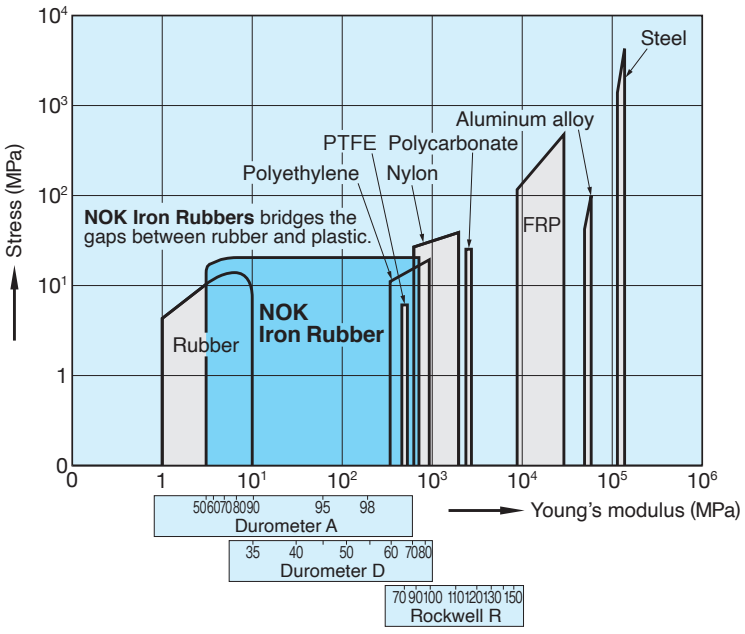


*"Iron Rubber" is a registered trademark of NOK (Trademark Registration No.: 2609032).


JIS B 2401-4 Equivalent Backup Rings

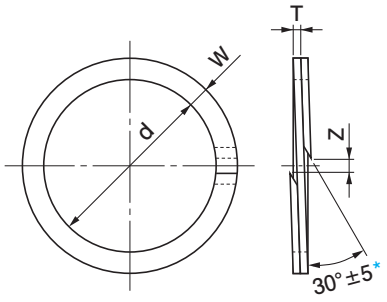

Spiral (T1)

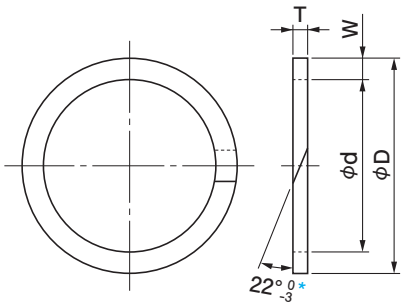

Bias-cut (T2)

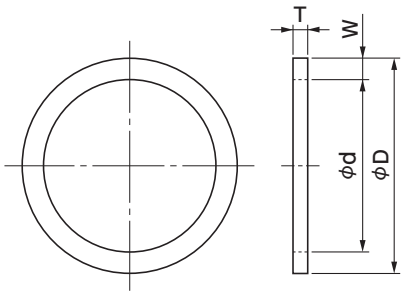

Endless (T3)

*The cutting angle for the nominal numbers on pages 3 through 10 is $40°^{0}_{-5}$

For P Series Use

(Unit: mm)

NOK part number			Backup ring nominal number	Spiral				Bias-cut and endless					Applicable O-ring JIS B 2401-1 dimension number
T1 (spiral)	T2 (bias-cut)	T3 (endless)		Inside diameter d	Width W	Thickness T	Clearance Z	Inside diameter d		Outside diameter D		Thickness T	
GN 0090 A1	GN 0367 A3	GN 0711 A0	P 3	3				3		6			P 3
GN 0093 A1	GN 0370 A2	GN 0714 A0	P 4	4				4		7			P 4
GN 0095 A1	GN 0372 A3	GN 0716 A0	P 5	5				5		8			P 5
GN 0097 A1	GN 0375 A2	GN 0719 A0	P 6	6				6		9			P 6
GN 0099 A1	GN 0378 A2	GN 0722 A0	P 7	7	$1.5^{+0.03}_{-0.05}$	0.7 ± 0.05	1.2 ± 0.4	7	$+0.15\ 0$	10	$0\ -0.15$	1.25 ± 0.1	P 7
GN 0101 A1	GN 0380 A5	GN 0724 A0	P 8	8				8		11			P 8
GN 0102 A1	GN 0382 A4	GN 0727 A0	P 9	9				9		12			P 9
GN 0105 A1	GN 0386 A2	GN 0731 A0	P 10	10				10		13			P 10
GN 0106 A0	GN 0387 A0	GN 0732 A0	P 10A	10				10		14			P 10A
GN 0107 A0	GN 0389 A0	GN 0734 A0	P 11	11				11		15			P 11
GN 0109 A0	GN 0390 A0	GN 0735 A0	P 11.2	11.2				11.2		15.2			P 11.2
GN 0110 A0	GN 0393 A0	GN 0739 A0	P 12	12				12		16			P 12
GN 0111 A0	GN 0395 A0	GN 0740 A0	P 12.5	12.5				12.5		16.5			P 12.5
GN 0113 A0	GN 0398 A0	GN 0744 A0	P 14	14	$2.0^{+0.03}_{-0.05}$	0.7 ± 0.05	1.4 ± 0.8	14	$+0.15\ 0$	18	$0\ -0.15$	1.25 ± 0.1	P 14
GN 0115 A0	GN 0401 A0	GN 0748 A0	P 15	15				15		19			P 15
GN 0117 A0	GN 0402 A0	GN 0750 A0	P 16	16				16		20			P 16
GN 0119 A0	GN 0408 A0	GN 0756 A0	P 18	18				18		22			P 18
GN 0122 A0	GN 0413 A0	GN 0761 A0	P 20	20				20		24			P 20
GN 0124 A0	GN 0414 A0	GN 0763 A0	P 21	21				21		25			P 21
GN 0125 A0	GN 0418 A0	GN 0768 A0	P 22	22				22		26			P 22
GN 0126 A0	GN 0419 A0	GN 0769 A0	P 22A	22				22		28			P 22A
GN 0128 A0	GN 0420 A0	GN 0770 A0	P 22.4	22.4				22.4		28.4			P 22.4
GN 0130 A0	GN 0425 A0	GN 0775 A0	P 24	24				24		30			P 24
GN 0132 A0	GN 0430 A0	GN 0780 A0	P 25	25				25		31			P 25
GN 0134 A0	GN 0431 A0	GN 0782 A0	P 25.5	25.5				25.5		31.5			P 25.5
GN 0135 A0	GN 0435 A0	GN 0786 A0	P 26	26				26		32			P 26
GN 0137 A0	GN 0439 A0	GN 0790 A0	P 28	28				28		34			P 28
GN 0139 A0	GN 0441 A0	GN 0793 A0	P 29	29				29		35			P 29
GN 0140 A0	GN 0444 A0	GN 0796 A0	P 29.5	29.5				29.5		35.5			P 29.5
GN 0142 A0	GN 0446 A0	GN 0798 A0	P 30	30				30		36			P 30
GN 0144 A0	GN 0451 A0	GN 0803 A0	P 31	31				31		37			P 31
GN 0145 A0	GN 0452 A0	GN 0804 A0	P 31.5	31.5				31.5		37.5			P 31.5
GN 0147 A0	GN 0453 A0	GN 0806 A0	P 32	32				32		38			P 32
GN 0149 A0	GN 0460 A0	GN 0813 A0	P 34	34				34		40			P 34
GN 0152 A0	GN 0462 A0	GN 0815 A0	P 35	35	$3.0^{+0.03}_{-0.05}$	0.7 ± 0.05	2.5 ± 1.5	35	$+0.20\ 0$	41	$0\ -0.20$	1.25 ± 0.1	P 35
GN 0153 A0	GN 0465 A0	GN 0819 A0	P 35.5	35.5				35.5		41.5			P 35.5
GN 0154 A0	GN 0467 A0	GN 0822 A0	P 36	36				36		42			P 36
GN 0156 A0	GN 0470 A0	GN 0825 A0	P 38	38				38		44			P 38
GN 0159 A0	GN 0475 A0	GN 0829 A0	P 39	39				39		45			P 39
GN 0160 A0	GN 0477 A0	GN 0831 A0	P 40	40				40		46			P 40
GN 0161 A0	GN 0479 A0	GN 0834 A0	P 41	41				41		47			P 41
GN 0164 A0	GN 0483 A0	GN 0839 A0	P 42	42				42		48			P 42
GN 0165 A0	GN 0485 A0	GN 0841 A0	P 44	44				44		50			P 44
GN 0169 A0	GN 0489 A0	GN 0844 A0	P 45	45				45		51			P 45
GN 0170 A0	GN 0492 A0	GN 0848 A0	P 46	46				46		52			P 46
GN 0173 A0	GN 0495 A0	GN 0851 A0	P 48	48				48		54			P 48
GN 0175 A0	GN 0499 A0	GN 0856 A0	P 49	49				49		55			P 49
GN 0177 A0	GN 0502 A0	GN 0859 A0	P 50	50				50		56			P 50

Note: Since there are cases where usage may not be appropriate depending on the usage conditions (for extremely high pressure or dynamic applications), please make sure to consult with NOK.

■When ordering, please make sure to specify the NOK part number.

Ex.1) If you wish to purchase a bias-cut backup ring to use with O-ring P85:
- NOK part number: GN 0563 A0

Ex.2) If you wish to purchase an endless backup ring to use with O-ring P85:
- NOK part number: GN 0931 A0

*1: For bias-cut and endless backup rings, the difference between the max. value and min. value for W for the same backup ring shall be 0.05 mm or less.
*2: Dimension Z indicates clearance when the backup ring is installed to a shaft for the O-ring nominal inside diameter.
*3: Bias-cut backup rings are made by adding a cut to a portion of an endless backup ring.
*4: "Rareflon" is a registered trademark of NOK for PTFE (Registered Trademark No.: 0792983).
*5: For details on the properties of Rareflon (10FF), please refer to Chapter C in the Standard Products Technical Notes (Cat. No.003).

Types of Backup Rings


Type	Material	Shape
T1	Rareflon (10FF)	Spiral
T2	Rareflon (10FF)	Bias-cut
T3	Rareflon (10FF)	Endless

For P Series Use


(Unit: mm)

NOK part number			Backup ring nominal number	Spiral				Bias-cut and endless					Applicable O-ring JIS B 2401-1 dimension number
T1 (spiral)	T2 (bias-cut)	T3 (endless)		Inside diameter d	Width W	Thickness T	Clearance Z	Inside diameter d		Outside diameter D		Thickness T	
GN 0174 A0	GN 0496 A0	GN 0852 A0	P 48A	48				48		58			P 48A
GN 0178 A0	GN 0503 A0	GN 0860 A0	P 50A	50				50		60			P 50A
GN 0180 A0	GN 0507 A0	GN 0866 A0	P 52	52				52		62			P 52
GN 0181 A0	GN 0509 A0	GN 0868 A0	P 53	53				53		63			P 53
GN 0185 A0	GN 0515 A0	GN 0874 A0	P 55	55				55		65			P 55
GN 0186 A0	GN 0516 A0	GN 0876 A0	P 56	56				56		66			P 56
GN 0189 A0	GN 0521 A0	GN 0882 A0	P 58	58				58		68			P 58
GN 0191 A0	GN 0524 A0	GN 0885 A0	P 60	60				60		70			P 60
GN 0194 A0	GN 0529 A0	GN 0890 A0	P 62	62				62		72			P 62
GN 0195 A0	GN 0531 A0	GN 0892 A0	P 63	63				63		73			P 63
GN 0199 A0	GN 0536 A0	GN 0898 A0	P 65	65				65		75			P 65
GN 0202 A0	GN 0540 A0	GN 0903 A0	P 67	67				67		77			P 67
GN 0206 A0	GN 0545 A0	GN 0909 A0	P 70	70				70		80			P 70
GN 0207 A0	GN 0548 A0	GN 0913 A0	P 71	71				71		81			P 71
GN 0211 A0	GN 0553 A0	GN 0919 A0	P 75	75				75		85			P 75
GN 0216 A0	GN 0559 A0	GN 0926 A0	P 80	80				80		90			P 80
GN 0220 A0	GN 0563 A0	GN 0931 A0	P 85	85	$5.0^{+0.03}_{-0.05}$	$0.9^{\pm0.06}$	$4.5^{\pm1.5}$	85	$^{+0.25}_{0}$	95	$^{0}_{-0.25}$	$1.9^{\pm0.13}$	P 85
GN 0226 A0	GN 0569 A0	GN 0938 A0	P 90	90				90		100			P 90
GN 0230 A0	GN 0573 A0	GN 0944 A0	P 95	95				95		105			P 95
GN 0236 A0	GN 0579 A0	GN 0951 A0	P 100	100				100		110			P 100
GN 0239 A0	GN 0581 A0	GN 0954 A0	P 102	102				102		112			P 102
GN 0243 A0	GN 0585 A0	GN 0958 A0	P 105	105				105		115			P 105
GN 0246 A0	GN 0590 A0	GN 0965 A0	P 110	110				110		120			P 110
GN 0249 A0	GN 0593 A0	GN 0969 A0	P 112	112				112		122			P 112
GN 0254 A0	GN 0596 A0	GN 0973 A0	P 115	115				115		125			P 115
GN 0258 A0	GN 0602 A0	GN 0981 A0	P 120	120				120		130			P 120
GN 0262 A0	GN 0605 A0	GN 0985 A0	P 125	125				125		135			P 125
GN 0265 A0	GN 0609 A0	GN 0990 A0	P 130	130				130		140			P 130
GN 0267 A0	GN 0611 A0	GN 0993 A0	P 132	132				132		142			P 132
GN 0270 A0	GN 0614 A0	GN 0997 A0	P 135	135				135		145			P 135
GN 0274 A0	GN 0617 A0	GN 1001 A0	P 140	140				140		150			P 140
GN 0277 A0	GN 0621 A0	GN 1006 A0	P 145	145				145		155			P 145
GN 0280 A0	GN 0623 A0	GN 1009 A2	P 150	150				150		160			P 150
GN 0281 A0	GN 0624 A0	GN 1010 A0	P 150A	150				150		165			P 150A
GN 0284 A0	GN 0628 A0	GN 1015 A0	P 155	155				155		170			P 155
GN 0287 A0	GN 0631 A0	GN 1019 A0	P 160	160				160		175			P 160
GN 0289 A0	GN 0633 A0	GN 1022 A0	P 165	165				165		180			P 165
GN 0292 A0	GN 0636 A0	GN 1026 A0	P 170	170				170		185			P 170
GN 0295 A0	GN 0639 A0	GN 1030 A0	P 175	175				175		190			P 175
GN 0298 A0	GN 0642 A0	GN 1034 A0	P 180	180				180		195			P 180
GN 0301 A0	GN 0645 A0	GN 1038 A0	P 185	185	$7.5^{+0.03}_{-0.05}$	$1.4^{\pm0.08}$	$6.0^{\pm2.0}$	185	$^{+0.30}_{0}$	200	$^{0}_{-0.30}$	$2.75^{\pm0.15}$	P 185
GN 0303 A0	GN 0647 A0	GN 1041 A0	P 190	190				190		205			P 190
GN 0306 A0	GN 0650 A0	GN 1045 A0	P 195	195				195		210			P 195
GN 0309 A0	GN 0653 A0	GN 1049 A0	P 200	200				200		215			P 200
GN 0311 A0	GN 0655 A0	GN 1052 A0	P 205	205				205		220			P 205
GN 0312 A0	GN 0656 A0	GN 1054 A0	P 209	209				209		224			P 209
GN 0314 A0	GN 0658 A0	GN 1056 A0	P 210	210				210		225			P 210
GN 0315 A0	GN 0659 A0	GN 1059 A0	P 215	215				215		230			P 215


JIS B 2401-4 Equivalent Backup Rings

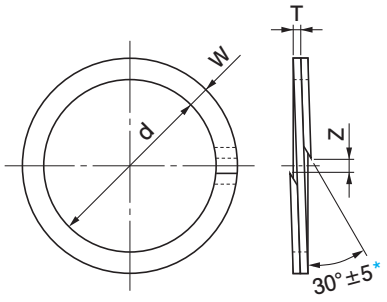

Spiral (T1)

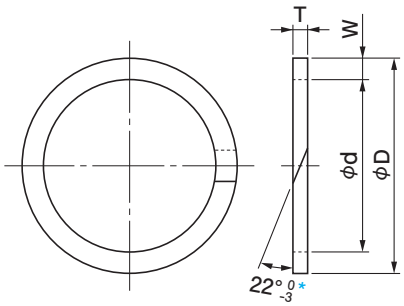

Bias-cut (T2)

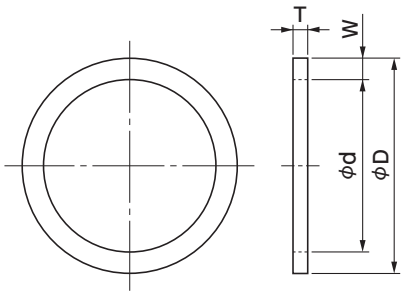

Endless (T3)

*The cutting angle for the nominal numbers on pages 3 through 10 is $40°^{0}_{-5}$

For P Series Use

(Unit: mm)

NOK part number			Backup ring nominal number	Spiral				Bias-cut and endless					Applicable O-ring JIS B 2401-1 dimension number
T1 (spiral)	T2 (bias-cut)	T3 (endless)		Inside diameter d	Width W	Thickness T	Clearance Z	Inside diameter d		Outside diameter D		Thickness T	
GN 0318 A0	GN 0662 A0	GN 1062 A0	P 220	220				220		235			P 220
GN 0319 A0	GN 0663 A0	GN 1064 A0	P 225	225				225		240			P 225
GN 0322 A0	GN 0666 A0	GN 1068 A0	P 230	230				230		245			P 230
GN 0323 A0	GN 0667 A0	GN 1070 A0	P 235	235				235		250			P 235
GN 0325 A0	GN 0669 A0	GN 1072 A0	P 240	240				240		255			P 240
GN 0327 A0	GN 0671 A0	GN 1075 A0	P 245	245				245		260			P 245
GN 0329 A0	GN 0673 A0	GN 1077 A0	P 250	250				250		265			P 250
GN 0331 A0	GN 0675 A0	GN 1080 A0	P 255	255				255		270			P 255
GN 0333 A0	GN 0677 A0	GN 1082 A0	P 260	260				260		275			P 260
GN 0334 A0	GN 0678 A0	GN 1084 A0	P 265	265				265		280			P 265
GN 0337 A0	GN 0681 A0	GN 1088 A0	P 270	270				270		285			P 270
GN 0338 A0	GN 0682 A0	GN 1090 A0	P 275	275				275		290			P 275
GN 0341 A0	GN 0684 A0	GN 1092 A0	P 280	280				280		295			P 280
GN 0342 A0	GN 0686 A0	GN 1095 A0	P 285	285	$7.5^{+0.03}_{-0.05}$	$1.4^{\pm 0.08}$	$6.0^{\pm 2.0}$	285	$^{+0.30}_{0}$	300	$^{0}_{-0.30}$	$2.75^{\pm 0.15}$	P 285
GN 0344 A0	GN 0688 A0	GN 1097 A0	P 290	290				290		305			P 290
GN 0346 A0	GN 0690 A0	GN 1100 A0	P 295	295				295		310			P 295
GN 0348 A0	GN 0692 A0	GN 1102 A0	P 300	300				300		315			P 300
GN 0350 A0	GN 0694 A0	GN 1106 A0	P 315	315				315		330			P 315
GN 0352 A0	GN 0696 A0	GN 1108 A0	P 320	320				320		335			P 320
GN 0354 A0	GN 0698 A0	GN 1112 A0	P 335	335				335		350			P 335
GN 0355 A0	GN 0699 A0	GN 1113 A0	P 340	340				340		355			P 340
GN 0357 A0	GN 0701 A0	GN 1117 A0	P 355	355				355		370			P 355
GN 0359 A0	GN 0703 A0	GN 1119 A0	P 360	360				360		375			P 360
GN 0361 A0	GN 0705 A0	GN 1123 A0	P 375	375				375		390			P 375
GN 0363 A0	GN 0707 A0	GN 1126 A0	P 385	385				385		400			P 385
GN 0365 A0	GN 0709 A0	GN 1129 A0	P 400	400				400		415			P 400

Note: Since there are cases where usage may not be appropriate depending on the usage conditions (for extremely high pressure or dynamic applications), please make sure to consult with NOK.

■When ordering, please make sure to specify the NOK part number.

Ex.1) If you wish to purchase a bias-cut backup ring to use with O-ring P240:
- NOK part number: GN 0669 A0

Ex.2) If you wish to purchase an endless backup ring to use with O-ring P240:
- NOK part number: GN 1072 A0

*1: For bias-cut and endless backup rings, the difference between the max. value and min. value for W for the same backup ring shall be 0.05 mm or less.
*2: Dimension Z indicates clearance when the backup ring is installed to a shaft for the O-ring nominal inside diameter.
*3: Bias-cut backup rings are made by adding a cut to a portion of an endless backup ring.
*4: "Rareflon" is a registered trademark of NOK for PTFE (Registered Trademark No.: 0792983).
*5: For details on the properties of Rareflon (10FF), please refer to Chapter C in the Standard Products Technical Notes (Cat. No.003).

Types of Backup Rings

Type	Material	Shape
T1	Rareflon (10FF)	Spiral
T2	Rareflon (10FF)	Bias-cut
T3	Rareflon (10FF)	Endless


For G Series Use

(Unit: mm)

NOK part number			Backup ring nominal number	Spiral				Bias-cut and endless					Applicable O-ring JIS B 2401-1 dimension number
T1 (spiral)	T2 (bias-cut)	T3 (endless)		Inside diameter d	Width W	Thickness T	Clearance Z	Inside diameter d		Outside diameter D		Thickness T	
GN 0131 A0	GN 0429 A0	GN 0779 A0	G 25	25				25		30			G 25
GN 0141 A0	GN 0445 A0	GN 0797 A0	G 30	30				30		35			G 30
GN 0151 A0	GN 0461 A0	GN 0814 A0	G 35	35				35		40			G 35
GN 1131 A0	GN 0476 A0	GN 0830 A0	G 40	40				40	+0.20 0	45	0 −0.20		G 40
GN 0168 A0	GN 0488 A0	GN 0843 A0	G 45	45				45		50			G 45
GN 0176 A0	GN 0501 A0	GN 0858 A0	G 50	50				50		55			G 50
GN 0184 A0	GN 0514 A0	GN 0873 A0	G 55	55				55		60			G 55
GN 0190 A0	GN 0523 A0	GN 0884 A0	G 60	60				60		65			G 60
GN 0198 A0	GN 0535 A0	GN 0897 A0	G 65	65				65		70			G 65
GN 0205 A0	GN 0543 A0	GN 0907 A0	G 70	70				70		75			G 70
GN 0210 A0	GN 0552 A0	GN 0918 A0	G 75	75				75		80			G 75
GN 0215 A0	GN 0558 A0	GN 0925 A0	G 80	80				80		85			G 80
GN 0219 A0	GN 0562 A0	GN 0930 A0	G 85	85	$2.5^{+0.03}_{-0.05}$	0.7 ± 0.05	4.5 ± 1.5	85		90		1.25 ± 0.10	G 85
GN 0225 A0	GN 0568 A0	GN 0937 A0	G 90	90				90		95			G 90
GN 0229 A0	GN 0572 A0	GN 0943 A0	G 95	95				95		100			G 95
GN 0235 A0	GN 0578 A0	GN 0950 A0	G 100	100				100	+0.25 0	105	0 −0.25		G 100
GN 0242 A0	GN 0584 A0	GN 0957 A0	G 105	105				105		110			G 105
GN 0245 A0	GN 0589 A0	GN 0964 A0	G 110	110				110		115			G 110
GN 0253 A0	GN 0595 A0	GN 0972 A0	G 115	115				115		120			G 115
GN 0257 A0	GN 0601 A0	GN 0980 A0	G 120	120				120		125			G 120
GN 0261 A0	GN 0604 A0	GN 0984 A0	G 125	125				125		130			G 125
GN 0264 A0	GN 0608 A0	GN 0989 A0	G 130	130				130		135			G 130
GN 0269 A0	GN 0613 A0	GN 0996 A0	G 135	135				135		140			G 135
GN 0273 A0	GN 0616 A0	GN 1000 A0	G 140	140				140		145			G 140
GN 0276 A0	GN 0620 A0	GN 1005 A0	G 145	145				145		150			G 145
GN 0280 A2	GN 0623 A2	GN 1009 A3	G 150	150				150		160			G 150
GN 0283 A0	GN 0627 A0	GN 1014 A0	G 155	155				155		165			G 155
GN 0286 A0	GN 0630 A0	GN 1018 A0	G 160	160				160		170			G 160
GN 0288 A0	GN 0632 A0	GN 1021 A0	G 165	165				165		175			G 165
GN 0291 A0	GN 0635 A0	GN 1025 A0	G 170	170				170		180			G 170
GN 0294 A0	GN 0638 A0	GN 1029 A0	G 175	175				175		185			G 175
GN 0297 A0	GN 0641 A0	GN 1033 A0	G 180	180				180		190			G 180
GN 0300 A0	GN 0644 A0	GN 1037 A0	G 185	185				185		195			G 185
GN 0302 A0	GN 0646 A0	GN 1040 A0	G 190	190				190		200			G 190
GN 0305 A0	GN 0649 A0	GN 1044 A0	G 195	195				195		205			G 195
GN 0308 A0	GN 0652 A0	GN 1048 A0	G 200	200	$5.0^{+0.03}_{-0.05}$	0.9 ± 0.06	6.0 ± 2.0	200	+0.30 0	210	0 −0.30	1.9 ± 0.13	G 200
GN 0313 A0	GN 0657 A0	GN 1055 A0	G 210	210				210		220			G 210
GN 0317 A0	GN 0661 A0	GN 1061 A0	G 220	220				220		230			G 220
GN 0321 A0	GN 0665 A0	GN 1067 A0	G 230	230				230		240			G 230
GN 0324 A0	GN 0668 A0	GN 1071 A0	G 240	240				240		250			G 240
GN 0328 A0	GN 0672 A0	GN 1076 A0	G 250	250				250		260			G 250
GN 0332 A0	GN 0676 A0	GN 1081 A0	G 260	260				260		270			G 260
GN 0336 A0	GN 0680 A0	GN 1087 A0	G 270	270				270		280			G 270
GN 0340 A0	GN 0683 A0	GN 1091 A0	G 280	280				280		290			G 280
GN 0343 A0	GN 0687 A0	GN 1096 A0	G 290	290				290		300			G 290
GN 0347 A0	GN 0691 A0	GN 1101 A0	G 300	300				300		310			G 300

NOK SP Coating O-Ring Series (Static Applications)

Material (NOK code)	A305+SP	F201+SP

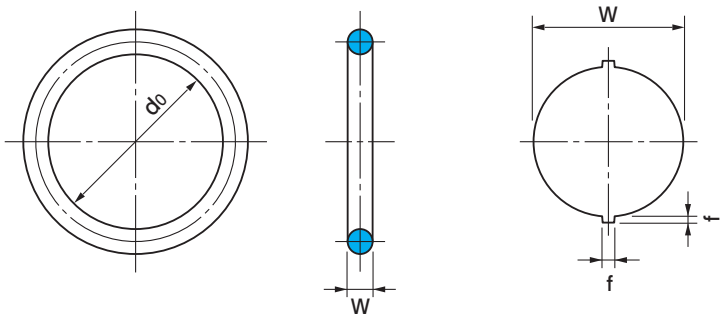

(Unit: mm)

NOK part number			NOK nominal number		O-ring dimensions				
Type Dimension code	Material code		ASP (A305+SP)	FSP (F201+SP)	Thickness W	Inside diameter d0	Tolerance of inside diameter 'd0'		Composite burr dimension f
	A305 +SP	F201 +SP					A305 +SP	F201 +SP	
CO 60000	A	I0	ASP 3	FSP 3	1.9±0.08	2.8	± 0.14	± 0.16	0.10 or less
CO 60001		G0	ASP 4	FSP 4		3.8			
CO 60002		F0	ASP 5	FSP 5		4.8	± 0.15	± 0.18	
CO 60003		H0	ASP 6	FSP 6		5.8			
CO 60004		G0	ASP 7	FSP 7		6.8	± 0.16	± 0.19	
CO 60005		I0	ASP 8	FSP 8		7.8			
CO 60006		F0	ASP 9	FSP 9		8.8	± 0.17	± 0.20	
CO 60007		K0	ASP 10	FSP 10		9.8			
CO 60008	A	G0	ASP 10A	FSP 10A	2.4±0.09	9.8			0.12 or less
CO 60009		E0	ASP 11	FSP 11		10.8	± 0.18	± 0.21	
CO 60011		F0	ASP 12	FSP 12		11.8	± 0.19	± 0.22	
CO 60012		H0	ASP 12.5	FSP 12.5		12.3			
CO 60013		J0	ASP 14	FSP 14		13.8			
CO 60014		G0	ASP 15	FSP 15		14.8	± 0.20	± 0.24	
CO 60015		H0	ASP 16	FSP 16		15.8			
CO 60016		N0	ASP 18	FSP 18		17.8	± 0.21	± 0.25	
CO 60017		J0	ASP 20	FSP 20		19.8	± 0.22	± 0.26	

■Note:

1. The SP Coating O-Ring Series is a series that has been designed in compliance with the JIS B 2401-1 P Series and to which a silicone film coating (SP coating) has been added to the O-ring surface.
2. The characteristics of the SP coating are given below.

Characteristics

- The reactive functional groups of the surface coating agent react with the rubber surface molecules to form an ultra-thin, non-adhesive layer and low-friction surface.
- This colorless, transparent coating is ultra-thin, with a thickness that measures a few microns.
- The SP coating does not affect the physical properties of the rubber material.
- The SP coating will continue to maintain its low-friction properties even after heat aging and fluid immersion testing.

*Satin finish treatment is applied for this series.

3. They are designed with dimensions that conform with the JIS B 2401-1 P Series.
4. Please refer to page 23 for details on groove dimensions.
5. This series is not recommended for use in dynamic applications.

■When ordering, please make sure to specify both the ① NOK nominal number and ② NOK part number.

Ex.1) If you wish to purchase a part with an inside diameter of 7.8 and thickness of 1.9 made of material A305+SP:
・NOK part number: CO 60005 A
Type/dimension code — Material code

Ex.2) If you wish to purchase a part with an inside diameter of 7.8 and thickness of 1.9 made of material F201+SP:
・NOK part number: CO 60005 I0
Type/dimension code — Material code

4 Features of SP Coating O-Rings



Non-adhesive | Low-friction | No lubricant required | Anti-static

The 4 features of SP Coating O-Rings provide the following 4 benefits:

Improved workability | Improved productivity | Reliable quality | Improved on-site cleanliness

DESIGN TECHNOLOGY | MATERIAL TECHNOLOGY | SURFACE TECHNOLOGY | GREASE TECHNOLOGY


Le-μ's Low emission μ seal

High-performance seal brand

which contributes to the sustainable society by low friction technology.

NOK RX Series (O-Ring series for refrigerant: Static/Dynamic Applications)

Material	Material code	RX
	NOK code	G2280
	Hue	Black

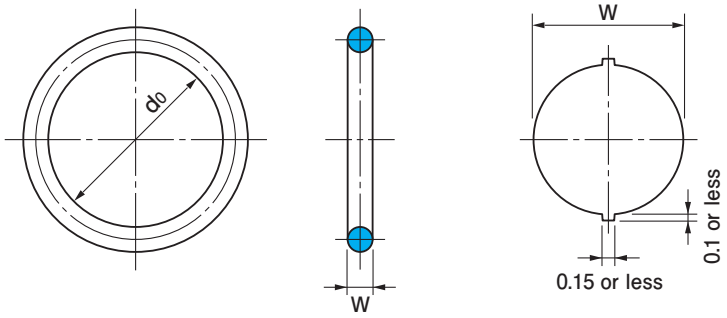


(Unit: mm)

NOK part number		NOK nominal number	O-ring dimensions		
Type Dimension code	RX G2280		Thickness W	Inside diameter d0	Tolerance of inside diameter 'd0'
CO 60000	M0	RXP 3	1.9±0.07	2.8	±0.24
CO 60001	P0	RXP 4		3.8	
CO 60002	L0	RXP 5		4.8	
CO 60003	P0	RXP 6		5.8	
CO 60004	R0	RXP 7		6.8	
CO 60005	X0	RXP 8		7.8	
CO 60006	Q0	RXP 9		8.8	
CO 60007	Y0	RXP10		9.8	
CO 60008	Q0	RXP10A	2.4±0.07	9.8	
CO 60009	L0	RXP11		10.8	
CO 60011	O0	RXP12		11.8	
CO 60012	P0	RXP12.5		12.3	
CO 60013	W0	RXP14		13.8	
CO 60014	R0	RXP15		14.8	
CO 60015	U0	RXP16		15.8	
CO 60016	Y0	RXP18		17.8	
CO 60017	Y0	RXP20		19.8	±0.30

■Note:

1. The RX series is suitable for refrigerant applications such as air conditioning, refrigeration and refrigeration equipment, such as cogeneration systems, and they are made in compliance with the JIS B 2401-1 P Series using NOK's 4 recommended materials.
2. The characteristics of the RX series are given below.

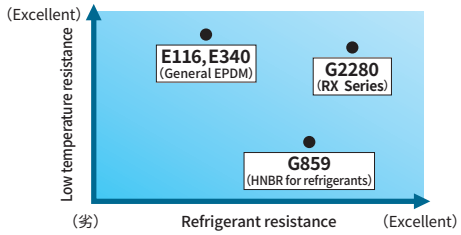

3. Although they are designed with dimensions that conform with the JIS B 2401-1 P Series, since they are special rubber materials, the tolerances are set to NOK's standard tolerances.
4. Please refer to page 23 for details on groove dimensions.

■When ordering, please make sure to specify both the ① NOK nominal number and ② NOK part number.
Ex.) If you wish to purchase a part with an inside diameter of 7.8 and thickness of 1.9:
- NOK nominal number: **RXP8**
- NOK part number: **CO 60005 X0**

Required characteristics			General EPDM		HNBR for refrigerants	Low-temperature HNBR
			E116	E340	G859	G2280
Hardness (durometer A)			70	80	80	80
Refrigerant resistance	Fluorocarbon refrigerant	R-1234yf	○	○	◎	◎
		R-32	△	△	△	◎
	Natural refrigerant	R-290	×	×	◎	◎
		R-744	×	○	◎	◎
Freezer oil resistant	PAG		◎	◎	◎	◎
	POE		△	△	◎	○
Heat resistance			◎	◎	○	○
Low temperature resistance (TR_{10} value)			◎ (−49°C)	◎ (−48°C)	△ (−22°C)	○ (−40°C)

Notes 1. PAG: Polyalkylene glycol, POE: Polyol ester
Notes 2. For other refrigerant resistance and refrigerator oil resistance, contact NOK.

Refrigerant-resistant O-rings G2280 is a rubber material with a good balance of refrigerant resistance, refrigeration oil resistance, heat resistance, and low temperature resistance.

16. Chemical/Solvent Resistance Material “FP64”

NOK offers its “FP64 material” as a rubber material with superior chemical and solvent resistance.

(1) Characteristics

- This material has solvent resistance that is equivalent to that of FFKM (perfluoroelastomer).
- It also has superior resistance to acids and alkalis.
- It has heat and cold resistance equivalent to that of typical FKM materials (fluororubber).
- It does not contain any heavy metals*.
  (*Heavy metals are defined as metals possessing a higher density than vanadium “V” in the periodic table.)
- It is suitable for use in locations where chemicals and solvents are used, such as places where chemicals, oils, paint equipment, pharmaceuticals, or office automation equipment are handled.

(2) General Properties

Table 7-1

NOK material code	FP64 (black)
1. Standard physical properties	
Hardness (durometer A)	70
Tensile strength (MPa)	15.7
Elongation (%)	190
2. Compression set	175°C×22h
(%)	22
3. Low temperature performance	
TR_{10} value (°C)	–10

(3) Rate of Volume Change for Various Chemical Fluids (Actual Values)

Table 7-2 shows the actual measured values for the rate of volume change for typical chemical fluids.

Table 7-2

Type of fluid		Temperature (°C)	Time (h)	General purpose FKM fluororubber	FFKM perfluoroelastomer	FP64
Acids/ alkalis	Acetic acid (98%)	118	70	110	10	27
	Nitric acid (60%)	86	70	50	5	11
	Sulfuric acid (90%)	95	168	12	5	3
	Thermal phosphoric acid (85%)	160	168	55	4	0
	Hydrofluoric acid (2%)	23	720	n.t	5	4
	Sodium hydroxide (30%)	100	70	Decomposition	5	0
	Potassium hydroxide (30%)	150	70	Decomposition	4	12
	Ammonia: NH4OH (2%)	23	720	n.t	3	2
Solvents	Acetone	20	168	200 or more	10	25
	Xylene	25	168	n.t	5	5
	MEK (methyl ethyl ketone)	20	168	200 or more	7	25
	Butyl acetate	125	70	200 or more	13	31
	Dibutyl ether	25	168	85	3	5
	Methyl t-butyl ether	23	70	120	17	26
	Toluene	23	70	11	2	4
	THF (tetrahydrofuran)	20	168	200 or more	11	28
	Dichloromethane	20	168	25	9	12

- n.t: Not tested
- The values shown in the table indicate rate of volume change (%).
- The actual values shown above are not guaranteed values.
- Contact NOK for the size that can be used.

17. Hydrogen-Resistant Materials "Special VMQ" & "E9079"

NOK provides "Special VMQ" and "E 9079" as rubber materials applicable to hydrogen equipment.

(1) Characteristics

- Has superior low-temperature properties compared to general-purpose EPDM.
- It has a small compression set, so it is less likely to wear out and has a long service life.

※ Regarding the use of E9079 and the special VMQ material, we will suggest the recommended material depending on the temperature and pressure conditions.

[Usage temperature guideline]
Special VMQ material: -60, E9079: -50℃


(2) General Properties

Table 8-1

NOK material code	General-propose EPDM JIS EPDM-90 Equivalent	Hydrogen resistance for low temperature EPDM E9079	Special for Hydrogen resistance VMQ
1. Standard physical properties			
Hardness (durometer A)	89	80	81
Tensile strength (MPa)	12.4	20.8	9.5
Elongation (%)	130	210	270
2. Low temperature performance			
TR_{10} value (°C)	−43	−57	−70 (Under measurement limit)
3. H2 Gas permeability			
transmittance coefficient [mol・m/(m²・sec・Pa)]	7.7E-15	6.0E-15	8.4E-14

(3) Evaluation Test

Test conditions
ø2.4 O-ring
25% compression
100°C in air

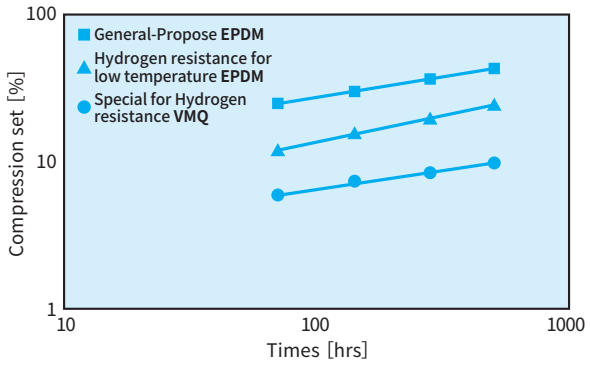


(3) Seal testing at low temperatures

Test conditions
ø1.9 O-ring
20% compression
Test Gas He
Measurement time 10 min

Table 8-2

Pressure	Mat'l	−50°C	−55°C	−60°C
70MPa	Special for hydrogen resistance VMQ	○	○	○
	Hydrogen resistance for low temperature EPDM	○	○	×
	General propose EPDM	×	×	×

○: No pressure change (no leakage) ×: Pressure change (leak)

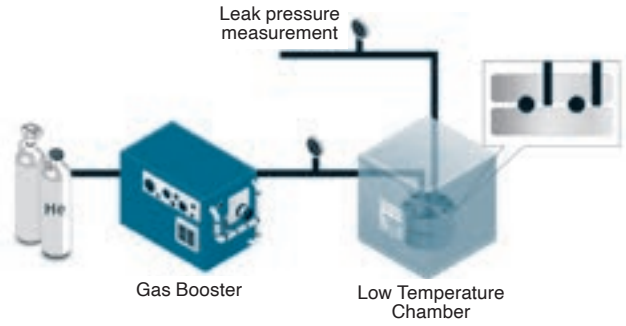

Test Equipment Image




Special VMQ and E9079 are superior in resistance to sag and low temperature sealing compared to other grades.

- The actual values shown above are not guaranteed values.
- In high-pressure environments, it is recommended to use the backup ring together. Contact NOK for details.
- Contact NOK for the size that can be used.

18. O-Ring Surface Treatment Technology

NOK also offers other forms of O-ring surface treatment to meet the needs of your intended use. Please inquire separately if you are interested.

Table 7-1

Surface treatment/ Name		Rareflon coating 11CF (gray)	Silicone film coating SP	Satin finish treatment
Structure		Rareflon (5 to 20 µm) 	Thin film formed by chemical reaction (a few microns) 	Microscopic indentations are formed on the O-ring surface (surface roughness of 4 to 8 µm) 
Friction coefficient*		0.1	0.1	1 or more (same as typical rubber)
Base material (rubber) and coating adhesion		△	○	–
Intended use	Improvement of non-adhesion between mating surface and O-ring	◎	◎	–
	Reduction of insertion force during assembly (Not appropriate for use in reciprocating applications.)	○	○	–
	Prevention of adhesion between separate O-rings	○	○	○

*Measured using a HEiDON friction tester.
Additional note: Depending on the type of rubber material, there are cases where individual surface treatments cannot be performed.

19. Joint O-Rings

By joining multiple O-rings, we can offer products with a diameter that measures ϕ400 or more. Please inquire separately if you are interested.

(1) Materials

NOK material code	A305 (black)	F201 (black)
JIS	NBR-70-1	FKM-70
Old JIS*	Class 1A compliant	Class 4D compliant

Old JIS: JIS B 2401-2005

(2) Thickness Dimensions for Available Tooling

(Unit: mm)

3	3.53	4	5.33	5.7	6
6.98	8.4	10	12	12.7	15

(3) Dimensions Offered: Inside diameter of ø400 or more.

(4) Dimensional Tolerances

- Inside diameter: The inside diameter tolerance for both NBR-70-1 and FKM-70 is ±1%.
- Thickness: Thickness tolerances are shown below:

(Unit: mm)

Thickness dimensions	A305 (NBR-70-1)	F201 (FKM-70)
From ø3.00 to ø5.70	±0.15	±0.20
More than ø5.70 to ø8.40	±0.25	±0.25
More than ø8.40 to ø11.0	±0.30	±0.30
More than ø11.0 to ø17.0	±0.50	±0.50

20. Klüber Lubricants for Sealing

Together with Klüber Lubrication München GmbH & Co. KG, a German company with 100 years of history as a supplier of specialty lubricants, NOK has established NOK KLÜBER CO., LTD. as a joint venture for providing Klüber lubricants for use in sealing applications.
NOK KLÜBER CO., LTD. carries on the technologies passed down through generations by both companies, and it leverages its proven track record and broad range of knowledge obtained through its extensive testing to provide a wide range of lubrication solutions.
Based on its abundant wealth of knowledge on a multitude of lubricants that it has built up throughout the years, NOK KLÜBER CO., LTD. is ready to meet the needs of its customers for the most demanding of conditions, such as for high-temperature, low-temperature, high-speed, and high-load bearing applications.

Types and Applications of NOK KLÜBER Lubricants

- **Types of lubricants**
  Oil, Grease, Paste, Wax, Spray, Coating
- **Applications**
  Rolling bearings, Sliding bearings, Chains, Gears, Valves, etc.
- **Special applications**
  For Food, Vaccum, Electronic devices, sealing lubricants

List of Klüber Lubricants for Sealing

Table 9-1

Application	Name of grease	Compatible with Rubbersr*1					Usage temperature range (°C)	Consistency (NLGI grade)	Usage examples	Features
		Nitrile rubber	Acrylic rubber	Silicone rubber	Fluororubber	Ethylene polypropylene rubber				
General use	SEALUB S-1	○	○	△	△	×	–30 - 120	2	Automobiles, construction machinery, agricultural machinery, etc.	General-purpose lubricants for rubber
Water resistance	SEALUB S-8	△	△	×	○	○	–45 - 160	3	Automobiles, household goods/equipment, etc.	Excellent water and steam resistance
Low temp./ high-speed	SEALUB S-14	○	○	△	○	×	–50 - 150	2	Automobiles, household electrical appliances, industrial machinery, etc.	Can widely be used for low to high temp. applications
Assembly (Spray)	SEALUB L101	○	○	○	○	△	–30 - 90	Wax	Assembly and insertion of various sealed parts, etc.	Quick-drying wax and spray products for assembly
Adhesion prevention (Spray)	KLÜBER L604	○	○	○	○	○	–25 - 260	Oil	Assembly and adhesion prevention treatment of various sealed parts, etc. Lubrication of electrical contacts and plastic parts, high-temperature sliding parts	Fluorinated oil for high-temperature use, adhesion prevention oil, spray products
Food processing machinery	Klübersynth UH1 64-2403	○	○	○	○	×	–10 - 140	3	Manufacturing equipment for food and beverages	Excellent water and steam resistance NSF H1*2 registered
	PARALIQ GTE 703	○	○	×	○	○	–50 - 150	3		
High temp., solvent and chemical resistance	SEALUB 502	○	○	○	○	○	–35 - 260	2	Assembly for seals, Fuel cell etc.	Highly superior thermal stability, solvent and chemical resistance

*1: Compatible with Rubbers
○: Compatible
(Recommend to test by actual conditions before use)
△: Consult with NOK before use
×: Not compatible

*2: NSF H1 lubricants
These lubricants can be used in locations for which incidental contact with food products is unavoidable.

21. Reference Materials -Actual Data, Blooming, Swelling, Failure Mode Case Studies, Etc.-

*Since data shown in this section is based on NOK test data, they do not represent guaranteed values.

(1) Compression Set Testing Method

As is most common for such testing, compression set testing is carried out in accordance with JIS K 6262 (physical testing method for vulcanized rubber).
For this test, however, for test samples with a large inside diameter, we cut such O-rings to a length of about 40 mm and secure them in a compression set testing jig and used spacers to ensure a constant compression ratio as shown in Figure 6-1. After keeping the jig in a chamber heated to a specified temperature, we periodically remove the O-rings and use a dial gauge to measure their compression set over time.
Compression set is calculated in accordance with JIS standards.

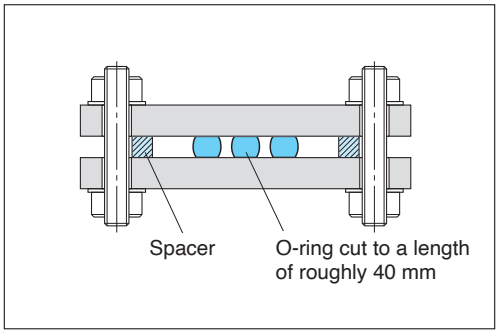


Fig. 6-1

(2) Surface Roughness and Sealing Performance

Changes in surface roughness will impact O-ring sealing performance.

- **Product type and dimensions**: OR 21.8×2.4 (OR NBR-70-1 P22-N)　Material: A305 (JIS NBR-70-1)
- **Test conditions**: Pressure: 3 MPa, Temp.: Room temperature,
  Time: 2 min. of pressurization time,　Compression ratio: 25%
  (NOK recommended values are used for O-ring mating groove dimensions.)

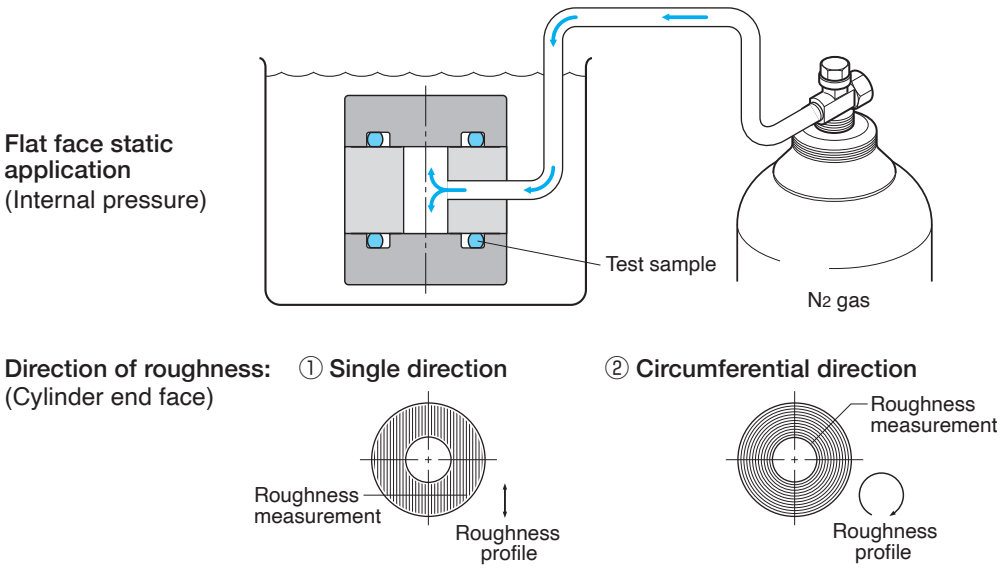


Fig. 6-2 **[Jig Schematic]**

- **Test results** (presence of leakage and leakage pressure)

Table 10-1　　○: No leakage　×: Leakage

Sealing surface roughness (Rz)		5 μm	6 μm	8 μm	10 μm	14 μm
Direction of roughness	① Single direction	○	○	○	○	×
	② Circumferential direction	○	○	○	○	○

Rz: Maximum roughness height

- **Summary of test results**

(1) For surface roughness in a single direction, leakage occurs at a sealing surface roughness of 14 μm (Rz).
(2) For surface roughness in a circumferential direction, leakage does not occur even at a sealing surface roughness of 14 μm.
With that said, however, since sealing performance will differ depending on roughness profile and usage conditions, please perform surface finishing to obtain a roughness as shown in Table 5-2 on page 14.

(3) O-Ring Compressive Stress Reaction Force

Since O-rings are compressed when they are being used, the O-ring itself will generate a reaction force (compressive stress reaction force).
O-ring compressive stress reaction force will be exerted as shown in Fig. 6-3. Please refer to this as a rough guide for determining tightening load for flanges. Furthermore, compressive stress reaction force will vary depending on such factors as rubber hardness, compression ratio, and O-ring dimensions.

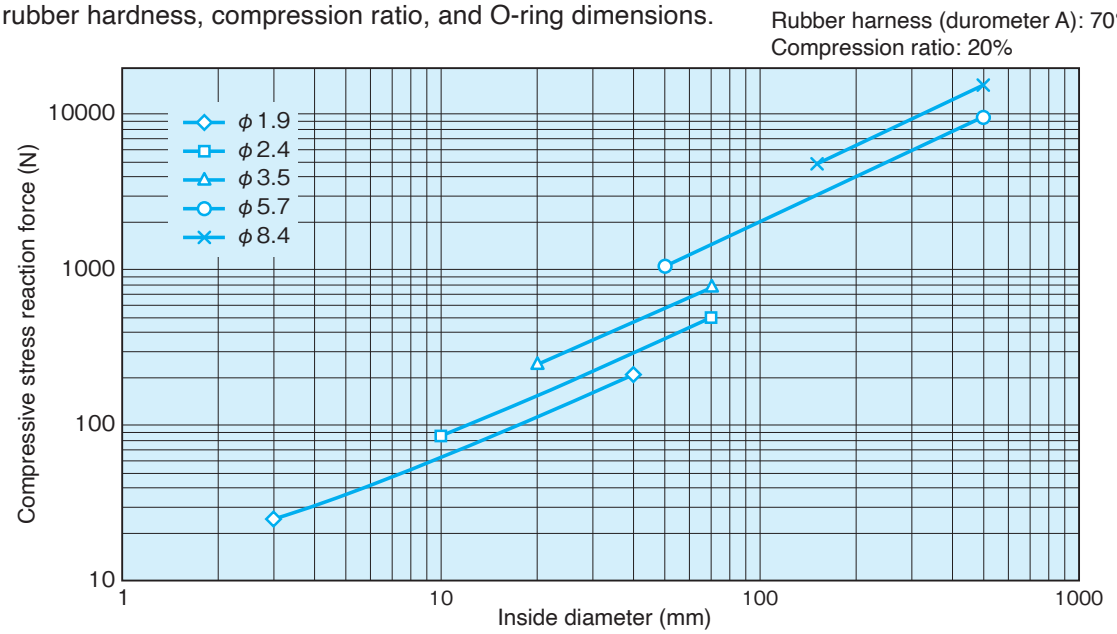


Fig. 6-3 O-Ring Compressive Stress Reaction Force

(4) O-Ring Sliding Resistance

When using O-rings in dynamic applications, sliding resistance will significantly impact the efficiency of the equipment. Since O-ring sliding resistance will be impacted by such factors as compression value, machining precision of rods or cylinders, pressure, sliding speed, lubrication conditions, temperature, hardness, and diameter dimensions, this value is difficult to express in general terms.
Fig. 6-4 provides a guide on kinetic friction for the standard dimensions of JIS P Series O-rings (durometer hardness of A70).

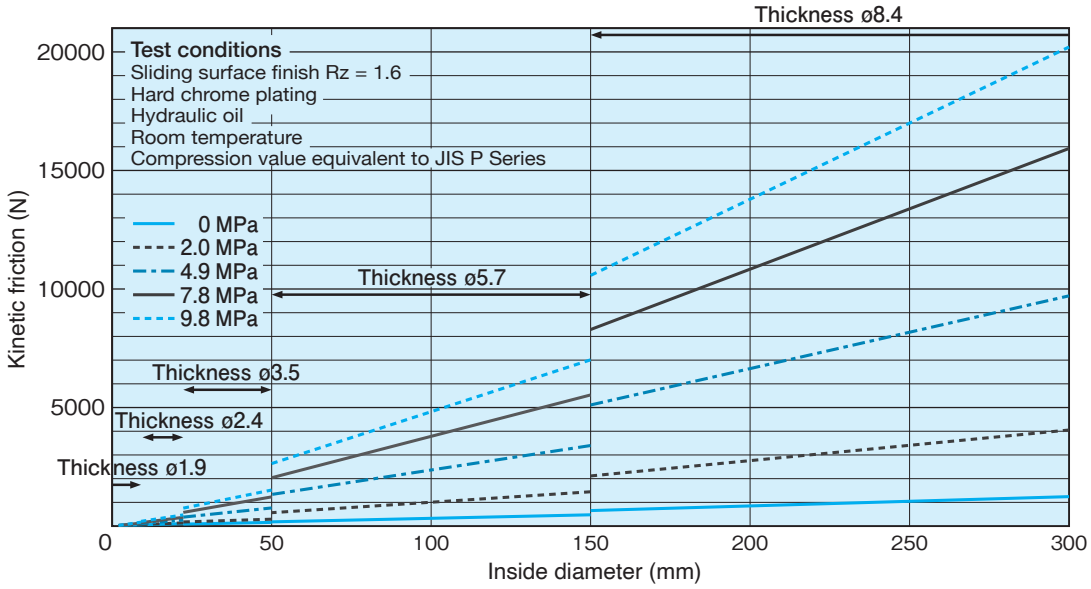


Fig. 6-4 O-Ring Kinetic Friction

Furthermore, there are two types of friction, “startup and kinetic,” and the values for startup friction are significantly higher than that for kinetic friction. Since sliding resistance and lifespan for O-rings for dynamic applications are severely impacted by lubrication conditions, it will be necessary to apply adequate lubrication for cases that involve air sealing.

(5) Relationship Between O-Ring Compression Ratio and Compression Set

Data
Environment: Exposed to air
Temperature: ① 80°C
② 100°C
③ 120°C
Thickness: 3.5 mm
Time: 70 h

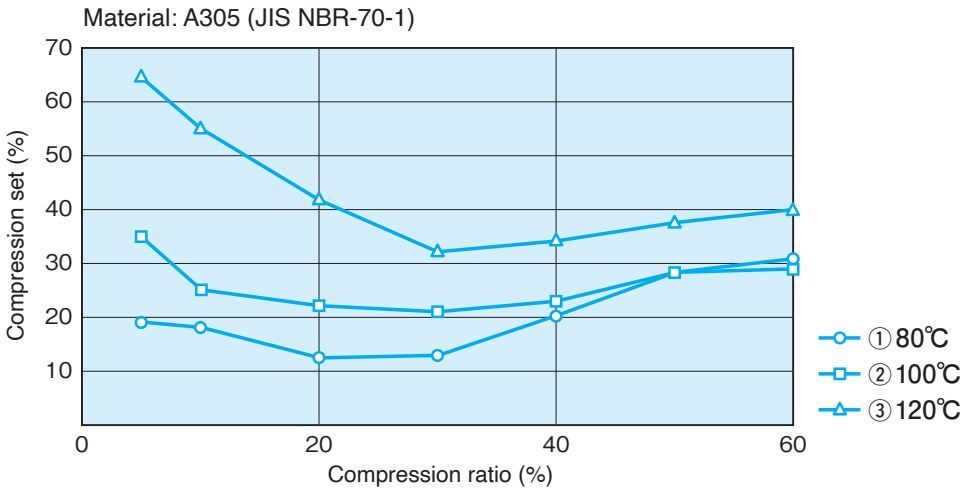


Fig. 6-5

(6) O-Rings for Pneumatic Dynamic Sealing (Friction Characteristics)

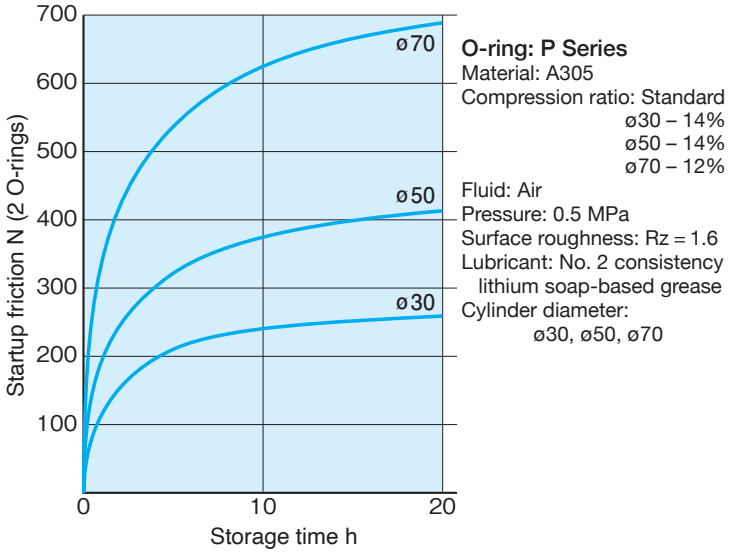


Fig. 6-6 Relationship Between Storage Time and Startup Friction

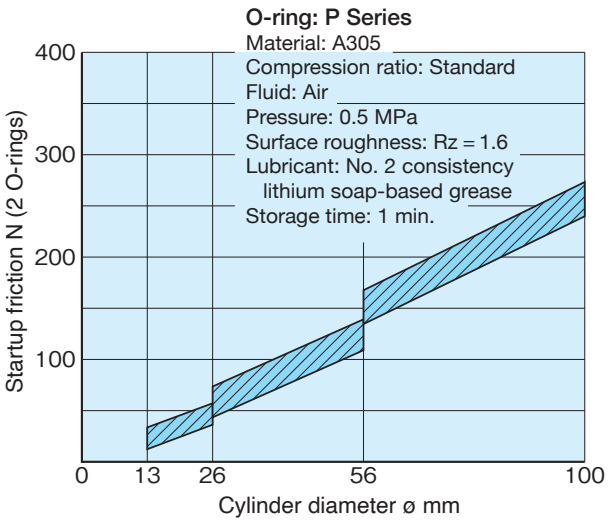


Fig. 6-7 Relationship Between Cylinder Diameter and Startup Friction

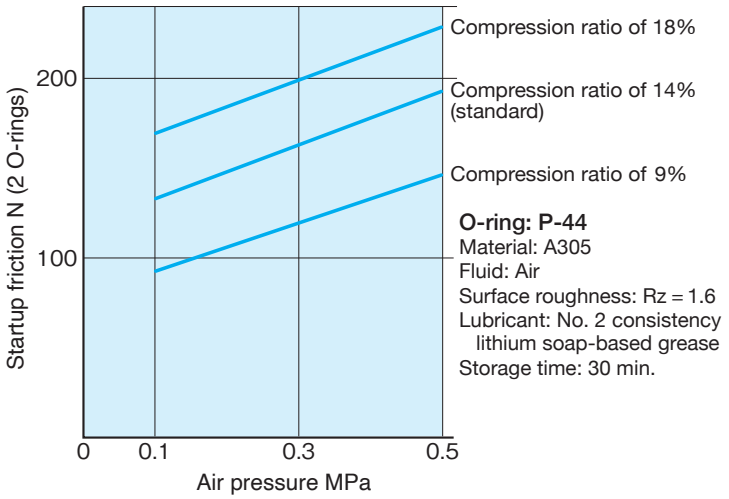


Fig. 6-8 Relationship Between Air Pressure and Startup Friction

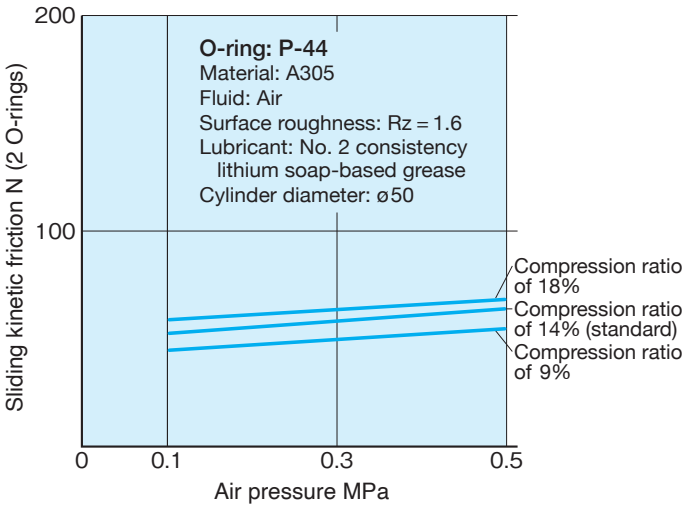


Fig. 6-9 Relationship Between Air Pressure and Sliding Kinetic Friction

(7) Blooming (Bloom)

Blooming refers to a phenomenon where substances precipitate and cover the surface of an O-ring due to migration of the compound agent from inside of uncured or vulcanized rubber, and anti-aging chemicals, such as sulfur and paraffin cause such blooming to more readily occur.

There are cases where blooming can be made to occur intentionally using rubber compounding technologies (to improve ozone resistance), as well as cases where such blooming can be incidental.
As shown in Fig. 6-10*1, the causes of this phenomenon are as follows:

1) **Low solubility** (solubility between rubber and compounding agents)
2) **High mobility** (chemical mobility of compounding agents within rubber)
   In addition to these 2 factors, the following factor can also be given:
3) **Differences in blooming substance concentration between the rubber surface and interior**

However, since numerous compounding agents are used within a rubber product, and since blooming is induced and derived through the interactions between such agents, this relationship cannot be illustrated using a model as simple as that shown in Fig. 6-10*2.

Additionally, differences in concentration of blooming substances are impacted by such factors as evaporation/ volatilization of blooming substances and oxidation of the rubber surface caused by air*3.

There are also cases where blooming due to rubber oxidation can occur in a matter of a few hours after being exposed to air.

In regards to blooming, our current understanding is based solely on experiential knowledge, and a complete theoretical explanation for this phenomenon has not yet been discovered.

Some observations based on such experiential knowledge are given below*2:

a) Direct exposure to light, especially short-wavelength fluorescent light, tends to cause blooming.
b) Friction and exposure of the rubber surface to wind tend to cause blooming.
c) Blooming occurs in the shape of a fingerprint after the surface has been touched.

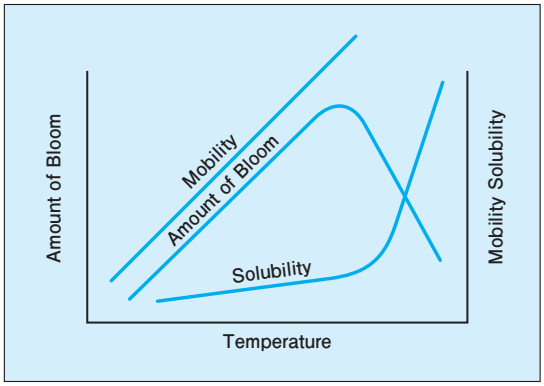








Fig. 6-10





(Dictionary of Polymer Technology, Taiseisha Ltd.)
*1.A.K.BHOWMIC.and S.K.DE., *Rubber Chem.Tech*., Vol. 52, 52, 976 (1979)
*2 Kaneko, H., *Applied Theory on the Physical Properties of Rubber*, No. 16, P 268, The Society of Rubber Science and Technology, Japan
*3 Urabe, N. and Sakaguchi F., *Polymer no Tomo*, Vol. 3, 227 (1966)

(7) Failure Modes and Countermeasures

In the event that leakage occurs, please refer to the following table when examining the failed part to identify the root cause and to determine a countermeasure.

Table 10-2

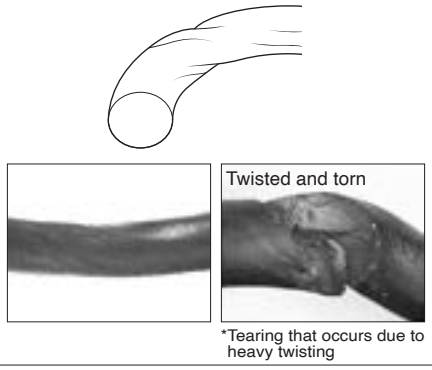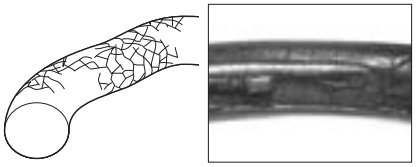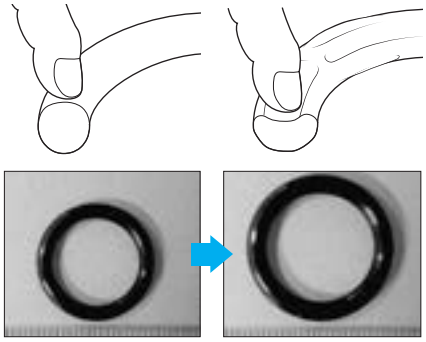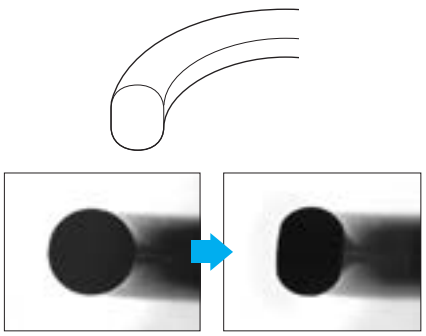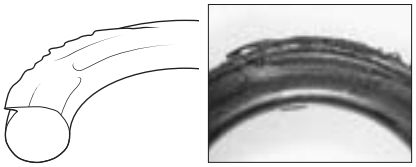Appearance			Phenomenon	Condition
Root cause	Countermeasure			
Twisting	O-ring is twisted and deformed	 *Tearing that occurs due to heavy twisting	① Movement is too fas ② Subjected to eccentric movement ③ Uneven sliding surface roughness ④ Installed in a twisted condition	① Replace with a D-ring, X-ring, or lip packing ② Eliminate eccentric movement ③ Improve sliding surface roughness ④ Install carefully (apply grease, etc.)
Hardening	Hardened and cracking occurs when bent		① Usage temperature exceeds the heat resistance limits of the rubber material	① • Lower the environmental temperature • Change to a material with superior heat resistance
Swelling (softening)	Exhibits overall softness and excessive swelling		① Rubber material is not suitable for the sealing medium ② In some cases, this can be caused by residual cleaning agents left on the hardware after cleaning with diesel fuel or gasoline	① Consider using a different rubber material ② Ensure that cleaning agent is completely removed
Permanent deformation	O-ring cross-section has been deformed to the shape of the groove		① • Excessive compression • High temperatures • Sealing medium In most cases, this is caused by an interaction between these different factors	① Consider changing the groove dimensions and materials Cool the area around the seal
Extrusion	Entire (or partial) circumference of O-ring outer periphery or inner periphery is torn		① Caused by excessive pressure, clearance, and swelling 	① • Ensure proper clearance or use backup rings • Consider using a different rubber material

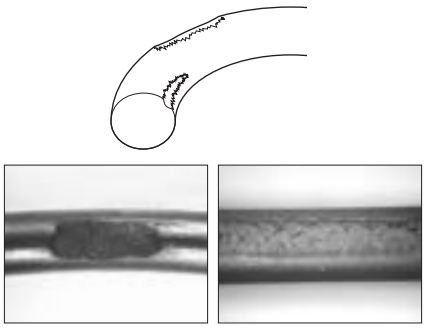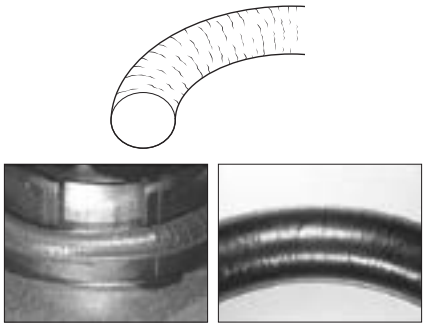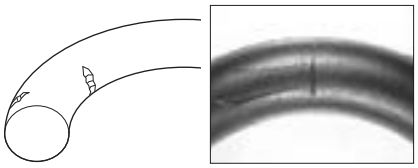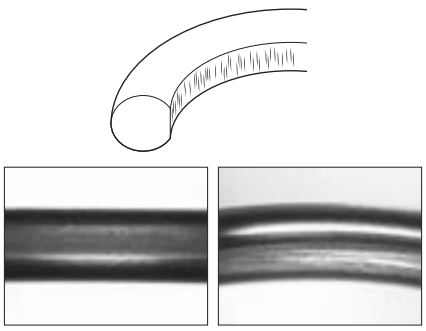Appearance			Phenomenon	Condition
Root cause	Countermeasure			
Scraping/ gouging	O-ring outer periphery or inner periphery is torn off or partially gouged out in proportion with the compression value		① Forced assembly for cylinder edges or shaft edges with inadequate chamfering ② Forced installation for O-ring groove that is shallower than standard dimensions when compared to O-ring thickness ③ Damage caused during installation to such portions as holes, screws, or edges	① Perform appropriate chamfering ② Consider using different groove dimensions ③ Pay careful attention to chamfering for edges and use an installation jig
Ozone cracking	Cracking fissures are exhibited across the entire O-ring surface		① O-ring has been exposed to air while in an elongated condition, thereby resulting in cracking due to the effects of ozone	① • Do not leave O-rings exposed to air while in an elongated condition • Apply grease or oil to the O-ring surface and make sure it is not directly exposed to air
Scratching	Scratching due to rubbing has occurred for the O-ring outer periphery or inner periphery		① O-ring inner (outer) periphery has been scratched by screw threads, etc., during O-ring installation	① Use a protective jig that prevents O-rings from coming into direct contact with screw threads, etc., during installation
Wear	Wear is exhibited for the O-ring contacting portions		① If surface finishing for the mating surface that comes into contact with the O-ring is rough, friction will be generated due to pressure fluctuations ② Insufficient lubrication ③ Foreign substances, such as dust or metal powder have been introduced	① Ensure that the roughness of the mating surface that comes into contact with the O-ring meets the standards ② Improve lubrication conditions ③ Remove foreign substances and use a filter or dust seal

(7) Swelling Mechanisms

(1) What is Swelling?

Swelling refers to a condition where oil molecules are allowed to penetrate in between polymer molecules, and where the forces trying to expand the intermolecular space reach an equilibrium with the elasticity of the cross-linked network of polymers.

Furthermore, the size of swelling is dependent upon the affinity between the oil and the polymer, and the higher the affinity between these two substances, the larger the swelling that will occur.

SP values (Solubility Parameter; the closer the polarity the higher the affinity) are often used as a rough standard to indicate affinity, and it can be said that substances with similar molecular structures exhibit higher affinity.

[Ex. 1] EPDM and mineral oil (high affinity) → Large swelling

EPDM SP value: 8 (low polarity)	**Mineral oil** SP value: 6 to 8 (low polarity)
$[CH_2{-}CH_2]_n[CH{-}CH_2]_m$ | CH_3	C_nH_{2n+2}


→ Since EPDM and mineral oil have similar structures (only C and H have no polar group) and exhibit high affinity, swelling will be large.

[Ex. 2] NBR and mineral oil (low affinity) → Small swelling

NBR SP value: 9 to 10 (high polarity)	**Mineral oil** SP value: 6 to 8 (low polarity)
$[CH_2{-}CH{=}CH{-}CH_2]_n[CH{-}CH_2]_m$ | $C{\equiv}N$ ← Polar group	C_nH_{2n+2}

→ Since NBR and mineral oil have dissimilar structures (NBR has a polar group) and exhibit low affinity, swelling will be small.

(2) Progression of Swelling

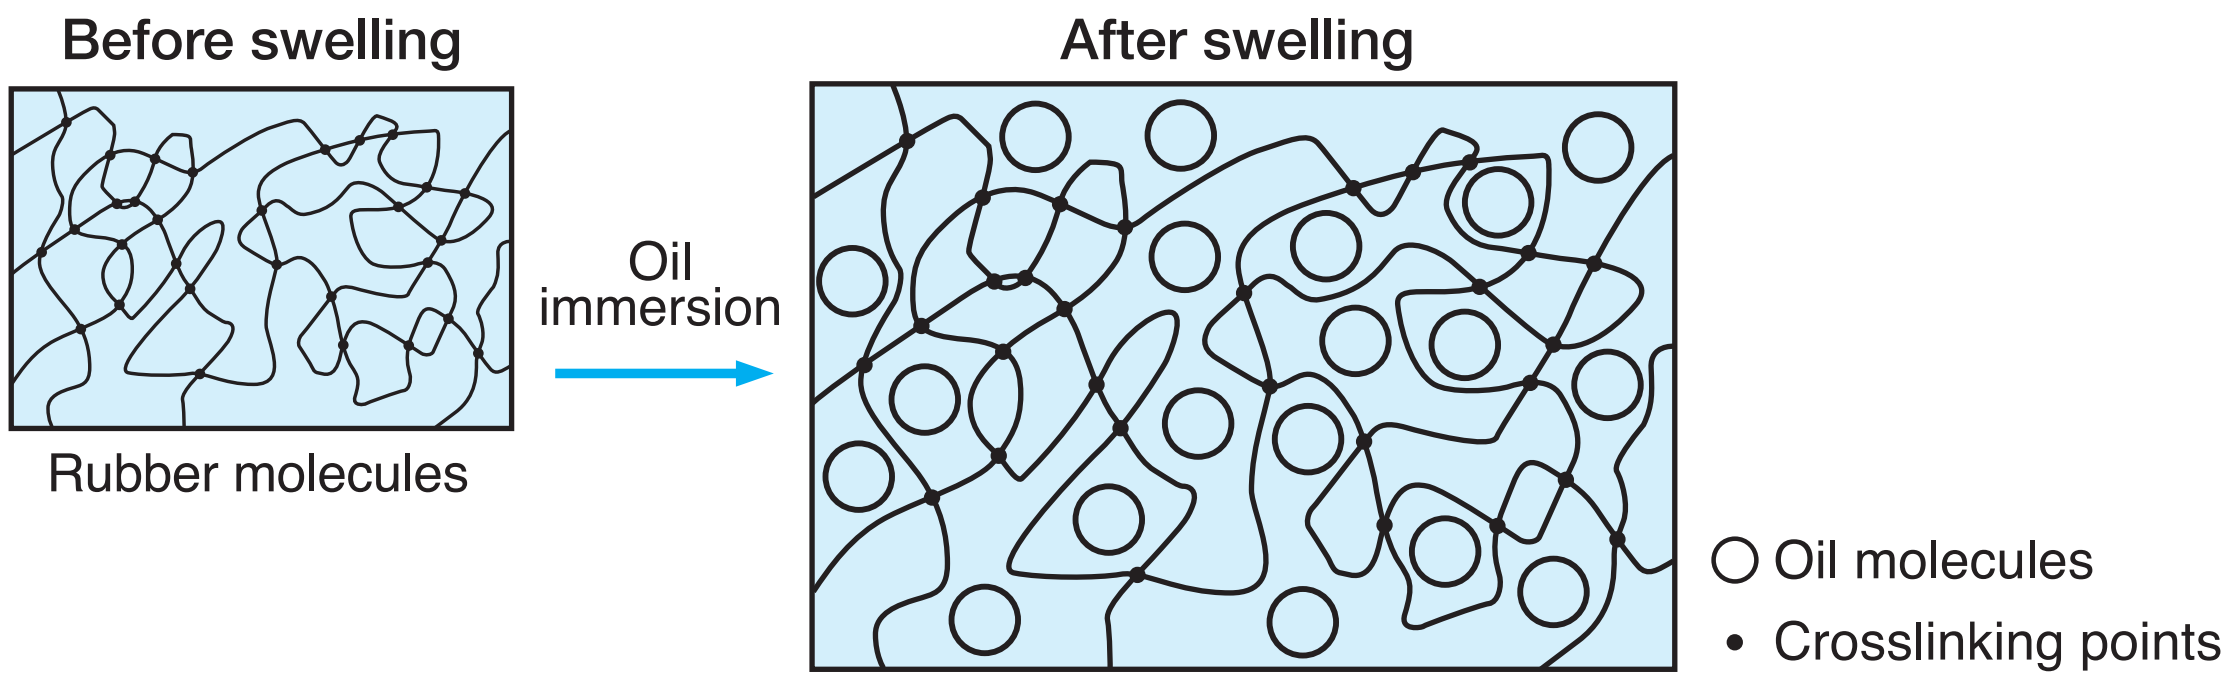

Oil intrudes in between the rubber molecules and tries to expand the space between the rubber molecules (swelling phenomenon). Although oil swelling will cause the space between the rubber molecules to expand, since crosslinking has occurred, swelling will only progress to a certain degree (swelling equilibrium).

[Reference: For non-crosslinked rubber, swelling will continue to increase and will ultimately result in dissolution (rubber-based adhesives and spray adhesives, etc.).]

Please refer to pages 8 and 9 for more details on affinity between the various materials and fluids.

Ex.) ◎ ... Suitable for usage (low affinity)

× ... Not suitable for usage (high affinity)

22. O-Ring Groove Dimensions for Standards with No Groove Indications

For more details on groove dimensions, please refer to the dimension tables for each of the individual product types. Since the groove dimensions for the old ARP568, AS568 Series, and ISO Equivalent General Industrial Series are not specified by AS standards or ISO standards, please refer to the following when using these products. Additionally, please make sure to refer to the reference materials that are listed starting from this page.

Old ARP568 and AS568 Series / ISO Equivalent General Industrial Series — Method for determining groove dimensions

[Procedure]


1. Determining compression ratio Usage range: 8 to 30%



$$E = \frac{\sigma}{W} \times 100$$

E (%) : Compression ratio
σ (mm): Compression value (= W − H)
W (mm): O-ring thickness
H (mm): Groove depth

2. Determining filling ratio Usage range: Max. value 90%, median value 75% (design target values)



$$n = \frac{\pi/4 \times W^2}{G \times H} \times 100$$

n (%) : Filling ratio
G (mm): Groove width
W (mm): O-ring thickness
H (mm): Groove depth

[Reference materials] Please refer to the following reference materials on groove dimensions.

(1) For the (ISO Equivalent) General Industrial Series (based on JIS B 2401-2)

Table 11-1 Groove Dimensions for Cylindrical Surface Sealing Applications (for static use) (Unit: mm)

O-ring thickness	Groove width $^{+0.25}_{0}$	Groove depth		Groove bottom r1	Groove corners r2
		For pistons	For rods		
1.80 ± 0.08	2.4	1.38	1.42	0.2 - 0.4	0.1 - 0.3
2.65 ± 0.09	3.6	2.07	2.15	0.2 - 0.4	0.1 - 0.3
3.55 ± 0.10	4.8	2.74	2.85	0.4 - 0.8	0.1 - 0.3
5.30 ± 0.13	7.1	4.19	4.36	0.4 - 0.8	0.1 - 0.3
7.00 ± 0.15	9.5	5.67	5.89	0.8 - 1.2	0.1 - 0.3




Table 11-2 Groove Dimensions for Cylindrical Surface Sealing Applications (for dynamic use) (Unit: mm)


O-ring thickness	Groove* width $^{+0.25}_{0}$	Groove depth*		Groove bottom r1	Groove corners r2
		For pistons	For rods		
1.80 ± 0.08	2.4	1.42	1.47	0.2 - 0.4	0.1 - 0.3
	2.2	1.46	1.57		
2.65 ± 0.09	3.6	2.16	2.24	0.2 - 0.4	0.1 - 0.3
	3.4	2.23	2.37		
3.55 ± 0.10	4.8	2.96	3.07	0.4 - 0.8	0.1 - 0.3
	4.6	3.03	3.24		
5.30 ± 0.13	7.1	4.48	4.66	0.4 - 0.8	0.1 - 0.3
	6.9	4.65	4.86		
7.00 ± 0.15	9.5	5.95	6.16	0.8 - 1.2	0.1 - 0.3
	9.3	6.20	6.43		

*Upper row: For hydraulic applications, Bottom row: For pneumatic applications


Table 11-3 Groove Dimensions for Flat Face Static Sealing Applications (Unit: mm)

O-ring thickness	Groove width $^{+0.25}_{0}$	Groove depth	Groove bottom r1	Groove corners r2
1.80 ± 0.08	2.6	1.28	0.2 - 0.4	0.1 - 0.3
2.65 ± 0.09	3.8	1.97	0.2 - 0.4	0.1 - 0.3
3.55 ± 0.10	5.0	2.75	0.4 - 0.8	0.1 - 0.3
5.30 ± 0.13	7.3	4.24	0.4 - 0.8	0.1 - 0.3
7.00 ± 0.15	9.7	5.72	0.8 - 1.2	0.1 - 0.3


(2) For the AS568 Series (based on MIL-G-5514G)




Groove Shapes

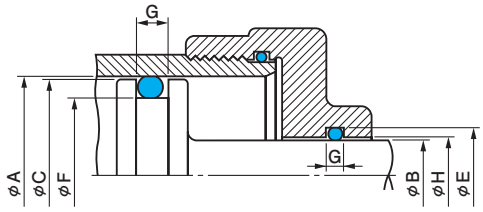

For Dynamic Applications

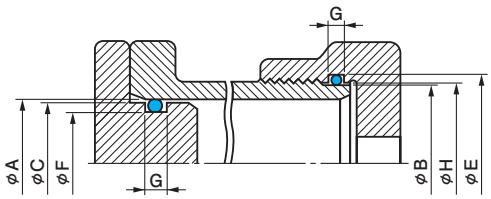

For Cylindrical Surface Static Applications




For Flat Face Static Applications


(Unit: mm)

MS28775 nominal dimensions	AN6227 nominal dimensions Old JIS W1516 nominal number	AN6230 nominal dimensions Old JIS W1517 nominal number	C	A	F	B	H	E	R	G No backup rings
001			2.36	2.42	0.83	0.83	0.89	2.42		1.60
			2.34	2.43	0.82	0.82	0.91	2.43		1.85
002			3.20	3.26	1.21	1.21	1.27	3.26		1.86
			3.18	3.27	1.20	1.20	1.29	3.27		2.10
003			3.98	4.04	1.60	1.60	1.66	4.04		2.11
			3.97	4.06	1.58	1.58	1.67	4.06		2.36
004			4.77	4.83	1.93	1.93	1.99	4.83		
			4.75	4.85	1.91	1.91	2.00	4.85		
005			5.56	5.62	2.74	2.74	2.80*	5.62		
			5.54	5.63	2.72	2.72	2.81*	5.63		
006	1		5.91	5.97	3.12	3.12	3.18	5.97		
			5.90	5.99	3.10	3.10	3.20	5.99	0.38	
007	2		6.70	6.76	3.91	3.91	3.97	6.76	0.13	
			6.68	6.78	3.89	3.89	3.98	6.78		
008	3		7.49	7.55	4.69	4.69	4.75	7.55		2.39
			7.47	7.56	4.68	4.68	4.77	7.56		2.64
009	4		8.30	8.36	5.51	5.51	5.57	8.36		
			8.28	8.38	5.49	5.49	5.58	8.38		
010	5		9.09	9.15	6.29	6.29	6.35	9.15		
			9.07	9.16	6.28	6.28	6.37	9.16		
011	6		10.66	10.72	7.87	7.87	7.93	10.72		
			10.65	10.74	7.85	7.85	7.95	10.74		
012	7		12.26	12.32	9.47	9.47	9.53	12.32		
			12.25	12.34	9.45	9.45	9.55	12.34		
013	Only use for static applications		13.91	13.97	11.12	11.04	11.10	13.90		
			13.90	14.02	11.08	11.00	11.12	13.94		
014			15.51	15.57	12.72	12.64	12.70	15.50		
			15.50	15.62	12.68	12.60	12.72	15.54		
015			17.09	17.15	14.30	14.22	14.28	17.07		
			17.07	17.19	14.25	14.18	14.30	17.11		
016			18.69	18.75	15.90	15.82	15.88	18.67		
			18.67	18.79	15.85	15.78	15.90	18.71		
017			20.26	20.32	17.47	17.39	17.45	20.25		
			20.25	20.37	17.43	17.35	17.47	20.29		
018			21.86	21.92	19.07	18.99	19.05	21.85		
			21.85	21.97	19.03	18.95	19.07	21.89	0.38	2.39
019			23.44	23.50	20.65	20.57	20.63	23.42	0.13	2.64
			23.42	23.54	20.60	20.53	20.65	23.46		
020			25.12	25.18	22.32	22.17	22.23	25.02		
			25.10	25.22	22.28	22.13	22.25	25.06		
021			26.69	26.75	23.90	23.74	23.80	26.60		
			26.67	26.79	23.86	23.70	23.82	26.64		
022			28.29	28.35	25.50	25.34	25.40	28.20		
			28.27	28.39	24.46	25.30	25.42	28.24		
023			29.87	29.93	27.07	26.92	26.98	29.77		
			29.85	29.97	27.03	26.88	27.00	29.81		
024			31.47	31.53	28.67	28.52	28.58	31.37		
			31.45	31.57	28.63	28.48	28.60	31.41		


*Values determined by NOK.




Groove Shapes

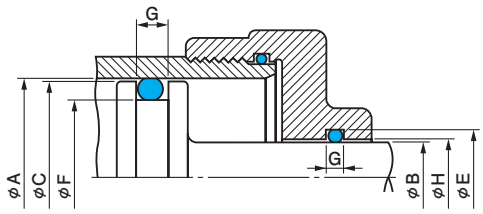

For Dynamic Applications

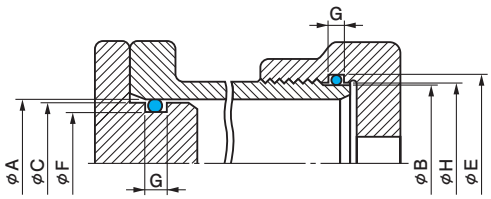


For Cylindrical Surface Static Applications




For Flat Face Static Applications

(Unit: mm)


MS28775 nominal dimensions	AN6227 nominal dimensions Old JIS W1516 nominal number	AN6230 nominal dimensions Old JIS W1517 nominal number	C	A	F	B	H	E	R	G No backup rings
025	Only use for static applications		33.04	33.10	30.25	30.09	30.15	32.95	0.38 0.13	2.39 2.64
			33.02	33.14	30.21	30.05	30.17	32.99		
026			34.64	34.70	31.85	31.69	31.75	34.55		
			34.62	34.74	31.81	31.65	31.77	34.59		
027			36.22	36.28	33.42	33.27	33.33	36.12		
			36.20	36.32	33.38	33.23	33.35	36.17		
028			37.82	37.88	35.02	34.87	34.93	37.72		
			37.80	37.92	34.98	34.83	34.95	37.77		
110	8		13.91	13.97	9.44	9.47	9.53	14.00	0.38 0.13	3.59 3.83
			13.90	14.02	9.40	9.43	9.55	14.04		
111	9		15.51	15.57	11.04	11.04	11.10	15.57		
			15.50	15.62	11.00	11.00	11.12	15.62		
112	10		17.09	17.15	12.62	12.64	12.70	17.17		
			17.07	17.19	12.58	12.60	12.72	17.22		
113	11		18.69	18.75	14.22	14.22	14.28	18.75		
			18.67	18.79	14.18	14.18	14.30	18.79		
114	12		20.26	20.32	15.79	15.82	15.88	20.35		
			20.25	20.37	15.75	15.78	15.90	20.39		
115	13		21.86	21.92	17.39	17.39	17.45	21.92		
			21.85	21.97	17.35	17.35	17.47	21.97		
116	14		23.44	23.50	18.97	18.99	19.05	23.52		
			23.42	23.54	18.93	18.95	19.07	23.57		
117	Only use for static applications		25.12	25.18	20.65	20.57	20.63	25.10	0.38 0.13	3.59 3.83
			25.10	25.22	20.60	20.53	20.65	25.14		
118			26.69	26.75	22.22	22.17	22.23	26.70		
			26.67	26.79	22.18	22.13	22.25	26.74		
119			28.29	28.35	23.82	23.74	23.80	28.27		
			28.27	28.39	23.78	23.70	23.82	28.32		
120			29.87	29.93	25.40	25.34	25.40	29.87		
			29.85	29.97	25.35	25.30	25.42	29.92		
121			31.47	31.53	27.00	26.92	26.98	31.45		
			31.45	31.57	26.95	26.88	27.00	31.49		
122			33.04	33.10	28.57	28.52	28.58	33.05		
			33.02	33.14	28.53	28.48	28.60	33.09		
123			34.64	34.70	30.17	30.09	30.15	34.62		
			34.62	34.74	30.13	30.05	30.17	34.67		
124			36.22	36.28	31.75	31.69	31.75	36.22		
			36.20	36.32	31.70	31.65	31.77	36.27		
125			37.82	37.88	33.35	33.27	33.33	37.80		
			37.80	37.92	33.30	33.23	33.35	37.84		
126			39.39	39.45	34.92	34.87	34.93	39.40		
			39.37	39.49	34.88	34.83	34.95	39.44		
127			40.99	41.05	36.52	36.44	36.50	40.97		
			40.97	41.09	36.48	36.40	36.55	41.02		
128			42.57	42.63	38.10	38.04	38.10	42.57		
			42.55	42.67	38.05	38.00	38.15	42.62		
129			44.17	44.23	39.70	39.62	39.68	44.15		
			44.15	44.27	39.65	39.58	39.72	44.19		




Groove Shapes

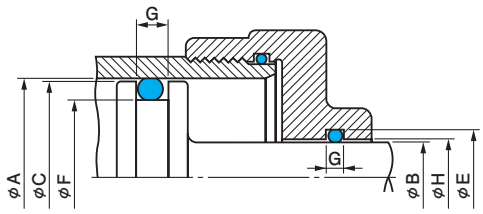

For Dynamic Applications

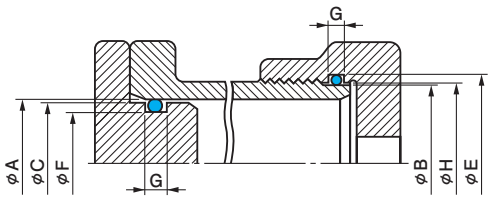


For Cylindrical Surface Static Applications




For Flat Face Static Applications

(Unit: mm)


MS28775 nominal dimensions	AN6227 nominal dimensions Old JIS W1516 nominal number	AN6230 nominal dimensions Old JIS W1517 nominal number	C	A	F	B	H	E	R	G No backup rings
130	Only use for static applications		45.77	45.85	41.32	41.22	41.28	45.75	0.38 0.13	3.59 3.83
			45.75	45.89	41.28	41.18	41.32	45.79		
131			47.34	47.43	42.90	42.79	42.85	47.32		
			47.32	47.47	42.85	42.75	42.90	47.37		
132			48.94	49.03	44.50	44.39	44.45	48.92		
			49.92	49.07	44.45	44.35	44.50	49.97		
133			50.52	50.60	46.07	45.97	46.05	50.50		
			50.50	50.64	46.03	45.93	46.10	50.54		
134			52.12	52.20	47.67	47.57	47.65	52.10		
			52.10	52.24	47.63	47.53	47.70	52.14		
135			53.72	53.80	49.27	49.17	49.26	53.70		
			53.70	53.84	49.23	49.13	49.30	53.74		
136			55.29	55.38	50.85	50.74	50.83	55.27		
			55.27	55.42	50.80	50.70	50.87	55.32		
137			56.89	56.98	52.45	52.34	52.43	56.88		
			56.88	57.02	52.40	52.30	53.47	56.92		
138			58.47	58.55	54.02	53.92	54.00	58.45		
			58.45	58.59	53.98	53.88	54.05	58.49		
139			60.07	60.15	55.62	55.52	55.61	60.05		
			60.05	60.19	55.58	55.48	55.65	60.09		
140			61.64	61.73	57.20	57.09	57.18	61.62		
			61.62	61.77	57.15	57.05	57.22	61.67		
141			63.24	63.33	58.80	58.69	58.78	63.23		
			63.20	63.37	58.75	58.65	58.82	63.27		
142			64.82	64.90	60.37	60.27	60.35	64.80		
			64.77	64.94	60.33	60.23	60.40	64.84		
143			66.42	66.50	61.97	61.87	61.96	66.40		
			66.37	66.54	61.93	61.83	62.00	66.44		
144			67.99	68.08	63.55	63.44	63.53	67.97		
			67.95	68.12	63.50	63.40	63.57	68.02		
145			69.59	69.68	65.15	65.04	65.13	69.58		
			69.55	69.72	65.10	65.00	65.17	69.62		
146			71.17	71.25	66.72	66.62	66.70	71.15		
			71.12	71.29	66.68	66.58	66.75	71.19		
147			72.77	72.85	68.32	68.22	68.31	72.75		
			72.72	72.89	68.28	68.18	68.35	72.79		
148			74.34	74.43	69.90	69.79	69.88	74.32		
			74.30	74.47	69.85	69.75	69.92	74.37		
149			75.94	76.03	71.50	71.39	71.48	75.93		
			75.90	76.07	71.45	71.35	71.52	75.97		
210	15		25.12	25.18	18.99	18.99	19.05	25.18	0.63 0.26	4.78 5.02
			25.10	25.22	18.95	18.95	19.07	25.22		
211	16		26.69	26.75	20.57	20.57	20.63	26.75		
			26.67	26.79	20.53	20.53	20.65	26.79		
212	17		28.29	28.35	22.17	22.17	22.23	28.35		
			28.27	28.39	22.13	22.13	22.25	28.39		
213	18		29.87	29.93	23.74	23.74	23.80	29.93		
			29.85	29.97	23.70	23.70	23.82	29.97		




Groove Shapes

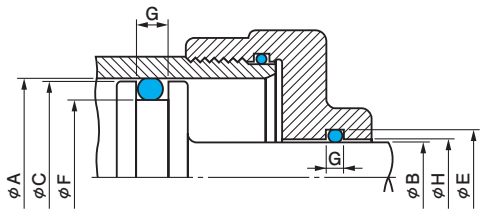

For Dynamic Applications

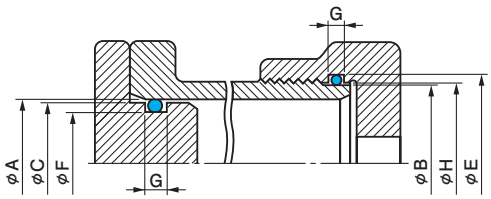


For Cylindrical Surface Static Applications




For Flat Face Static Applications

(Unit: mm)


MS28775 nominal dimensions	AN6227 nominal dimensions Old JIS W1516 nominal number	AN6230 nominal dimensions Old JIS W1517 nominal number	C	A	F	B	H	E	R	G No backup rings
214	19		31.47	31.53	25.34	25.34	25.40	31.53		
			31.45	31.57	25.30	25.30	25.42	31.57		
215	20		33.04	33.10	26.92	26.92	26.98	33.10		
			33.02	33.14	26.88	26.88	27.00	33.14		
216	21		34.64	34.70	28.52	28.52	28.58	34.70		
			34.62	34.74	28.48	28.48	28.60	34.74		
217	22		36.22	36.28	30.09	30.09	30.15	36.28		
			36.20	36.32	30.05	30.05	30.17	36.32		
218	23		37.82	37.88	31.69	31.69	31.75	37.88	0.63	4.78
			37.80	37.92	31.65	31.65	31.77	37.92	0.26	5.02
219	24		39.39	39.45	33.27	33.27	33.33	39.45		
			39.37	39.49	33.23	33.23	33.35	39.49		
220	25		40.99	41.05	34.87	34.87	34.93	41.05		
			40.97	41.09	34.83	34.83	34.95	41.09		
221	26		42.57	42.63	36.44	36.44	36.50	42.63		
			42.55	42.67	36.40	36.40	36.52	42.67		
222	27		44.17	44.23	38.04	38.04	38.10	44.23		
			44.15	44.27	38.00	38.00	38.12	44.27		
223	Only use for static applications	1	47.34	47.43	41.24	41.22	41.28	47.40		
			47.32	47.47	41.20	41.18	41.32	47.44		
224		2	50.52	50.60	44.42	44.39	44.45	50.58		
			50.50	50.64	44.38	44.35	44.50	50.62		
225		3	53.72	53.80	47.62	47.57	47.65	53.75		
			53.70	53.84	47.58	47.53	47.70	53.79		
226		4	56.89	56.98	50.80	50.74	50.83	56.93		
			56.88	57.02	50.75	50.70	50.87	56.97		
227		5	60.07	60.15	53.97	53.92	54.00	60.10		
			60.05	60.19	53.93	53.88	54.05	60.14		
228		6	63.24	63.33	57.15	57.09	57.18	63.28		
			63.20	63.37	57.10	57.05	57.22	63.32		
229		7	66.42	66.50	60.32	60.27	60.35	66.45		
			66.37	66.54	60.28	60.23	60.40	66.49		
230		8	69.59	69.68	63.50	63.44	63.53	69.63	0.63	4.78
			69.55	69.72	63.45	63.40	63.57	66.67	0.26	5.02
231		9	72.77	72.85	66.67	66.62	66.70	72.80		
			72.72	72.89	66.63	66.58	66.75	72.84		
232		10	75.94	76.03	69.85	69.79	69.88	75.98		
			75.90	76.07	69.80	69.75	69.92	76.02		
233		11	79.12	79.20	73.02	72.97	73.05	79.15		
			79.07	79.24	72.98	72.93	73.10	79.19		
234		12	82.29	82.38	76.20	76.12	76.20	82.30		
			82.25	82.42	76.15	76.08	76.25	82.34		
235		13	85.47	85.55	79.37	79.29	79.38	85.48		
			85.42	85.59	79.33	79.25	79.42	85.52		
236		14	88.64	88.73	82.55	82.47	82.55	88.65		
			88.60	88.77	82.50	82.43	82.60	88.69		
237		15	91.82	91.90	85.72	85.64	85.73	91.83		
			91.77	91.94	85.68	85.60	85.77	91.87		




Groove Shapes

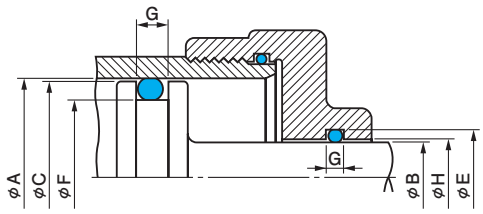

For Dynamic Applications

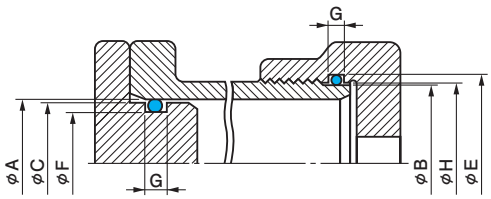


For Cylindrical Surface Static Applications




For Flat Face Static Applications

(Unit: mm)


MS28775 nominal dimensions	AN6227 nominal dimensions Old JIS W1516 nominal number	AN6230 nominal dimensions Old JIS W1517 nominal number	C	A	F	B	H	E	R	G No backup rings
238	Only use for static applications	16	94.99	95.08	88.90	88.82	88.90	95.00	0.63	4.78
			94.95	95.12	88.85	88.78	88.95	95.04	0.26	5.02
239		17	98.17	98.25	92.07	91.99	92.08	98.18		
			98.12	98.29	92.03	91.95	92.12	98.22		
240		18	101.34	101.43	95.25	95.17	95.25	101.35		
			101.30	101.47	95.20	95.13	95.30	101.39		
241		19	104.52	104.60	98.42	98.34	98.43	104.53		
			104.47	104.64	98.38	98.30	98.47	104.57		
242		20	107.69	107.78	101.60	101.52	101.60	107.70		
			107.65	107.82	101.55	101.48	101.65	107.74		
243		21	110.87	110.95	104.77	104.69	104.78	110.88		
			110.82	110.99	104.73	104.65	104.82	110.92		
244		22	114.02	114.13	107.95	107.87	107.95	114.05		
			113.97	114.17	107.90	107.83	108.00	114.09		
245		23	117.19	117.30	111.12	111.04	111.13	117.23		
			117.15	117.34	111.08	111.00	111.17	117.27		
246		24	120.37	120.48	114.30	114.22	114.33	120.40		
			120.32	120.52	114.25	114.18	114.37	120.44		
247		25	123.54	123.65	117.47	117.39	117.50	123.58		
			123.50	123.69	117.43	117.35	117.55	123.62		
325	28		47.34	47.43	37.97	38.04	38.10	47.50		
			47.32	47.47	37.93	38.00	38.15	47.54		
326	29		50.52	50.60	41.14	41.22	41.28	50.68		
			50.50	50.64	41.10	41.18	41.32	50.72		
327	30		53.72	53.80	44.34	44.39	44.45	53.85		
			53.70	53.84	44.30	44.35	44.50	53.89		
328	31		56.89	56.98	47.52	47.57	47.65	57.03		
			56.88	57.02	47.48	47.53	47.70	57.07		
329	32		60.07	60.15	50.69	50.74	50.83	60.20		
			60.05	60.19	50.65	50.70	50.87	60.24		
330	33		63.24	63.33	53.87	53.92	54.00	63.38		
			63.20	63.37	53.83	53.88	54.05	63.42		
331	34		66.42	66.50	57.04	57.09	57.18	66.55		
			66.37	66.54	57.00	57.05	57.22	66.59	0.88	7.14
332	35		69.59	69.68	60.22	60.27	60.35	69.73	0.51	7.39
			69.55	69.72	60.18	60.23	60.40	69.77		
333	36		72.77	72.85	63.39	63.44	63.53	72.90		
			72.72	72.89	63.35	63.40	63.57	72.94		
334	37		75.94	76.03	66.57	66.62	66.70	76.08		
			75.90	76.07	66.53	66.58	66.75	76.12		
335	38		79.12	79.20	69.74	69.79	69.88	79.25		
			79.07	79.24	69.70	69.75	69.92	79.29		
336	39		82.29	82.38	72.92	72.97	73.05	82.43		
			82.25	82.42	72.88	72.93	73.10	82.47		
337	40		85.47	85.55	76.09	76.12	76.20	85.58		
			85.42	85.59	76.05	76.08	76.25	85.62		
338	41		88.64	88.73	79.27	79.29	79.38	88.75		
			88.60	88.77	79.23	79.25	79.42	88.79		




Groove Shapes

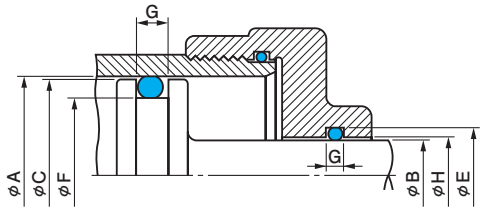

For Dynamic Applications

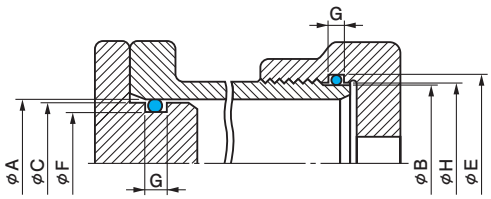

For Cylindrical Surface Static Applications




For Flat Face Static Applications


(Unit: mm)

MS28775 nominal dimensions	AN6227 nominal dimensions Old JIS W1516 nominal number	AN6230 nominal dimensions Old JIS W1517 nominal number	C	A	F	B	H	E	R	G No backup rings
339	42		91.82	91.90	82.44	82.47	82.55	91.93		
			91.77	91.94	82.40	82.43	82.60	91.97		
340	43		94.99	95.08	85.62	85.64	85.73	95.10		
			94.95	95.12	85.58	85.60	85.77	95.14		
341	44		98.17	98.25	88.79	88.82	88.90	98.28		
			98.12	98.29	88.75	88.78	88.95	98.32		
342	45		101.34	101.43	91.97	91.99	92.08	101.45		
			101.30	101.47	91.93	91.95	92.12	101.49		
343	46		104.52	104.60	95.14	95.17	95.25	104.63		
			104.47	104.64	95.10	95.13	95.30	104.67		
344	47		107.69	107.78	98.32	98.34	98.43	107.80		7.14
			107.65	107.82	98.28	98.30	98.47	107.84		7.39
345	48		110.87	110.95	101.49	101.52	101.60	110.98		
			110.82	110.99	101.45	101.48	101.65	111.02		
346	49		114.02	114.13	104.67	104.69	104.78	114.15		
			113.97	114.17	104.63	104.65	104.82	114.19		
347	50		117.19	117.30	107.84	107.87	107.95	117.33		
			117.15	117.34	107.80	107.83	108.00	117.37		
348	51		120.37	120.48	111.02	111.04	111.13	120.50		
			120.32	120.52	110.98	111.00	111.17	120.54		
349	52		123.54	123.65	114.19	114.22	114.30	123.68		
			123.50	123.69	114.15	114.18	114.35	123.72		
425	88		126.23	126.34	114.22	114.22	114.33	126.34		
			126.19	126.41	114.15	114.15	114.37	126.41	0.88	
426	53		129.41	129.52	117.39	117.39	117.50	129.52	0.51	
			129.37	129.59	117.33	117.33	117.55	129.59		
427	54		132.58	132.69	120.57	120.57	120.68	132.69		
			132.54	132.76	120.50	120.50	120.72	132.76		
428	55		135.76	135.87	123.74	123.74	123.85	135.87		
			135.72	135.94	123.68	123.68	123.90	135.94		
429	56		138.93	139.04	126.92	126.92	127.03	139.04		
			138.89	139.11	126.85	126.85	127.07	139.11		
430	57		142.11	142.22	130.09	130.09	130.20	142.22		
			142.07	142.29	130.03	130.03	130.25	142.29		
431	58		145.28	145.39	133.27	133.27	133.38	145.39		9.53
			145.24	145.46	133.20	133.20	133.42	145.46		9.77
432	59		148.46	148.57	136.44	136.44	136.55	148.57		
			148.42	148.64	136.38	136.38	136.60	148.64		
433	60		151.63	151.74	139.62	139.62	139.73	151.74		
			151.59	151.81	139.55	139.55	139.77	151.81		
434	61		154.81	154.92	142.79	142.79	142.90	154.92		
			154.77	154.99	142.73	142.73	142.95	154.99		
435	62		157.98	158.09	145.97	145.97	146.08	158.09		
			157.94	158.16	145.90	145.90	146.12	158.16		
436	63		161.16	161.27	149.14	149.14	149.25	161.27		
			161.12	161.34	149.08	149.08	149.30	161.34		
437	64		164.33	164.44	152.32	152.32	152.43*	164.44		
			164.29	164.51	152.25	152.25	152.47*	164.51		


*Values determined by NOK.




Groove Shapes

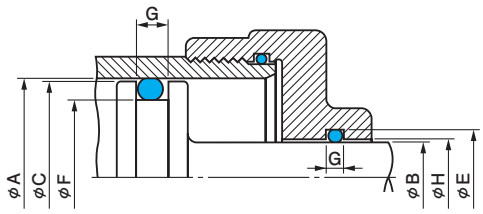

For Dynamic Applications

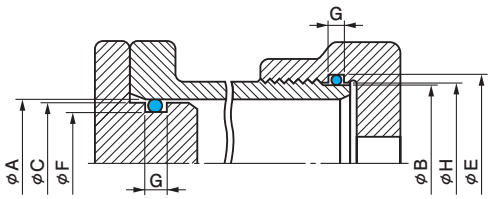

For Cylindrical Surface Static Applications



For Flat Face Static Applications

(Unit: mm)


MS28775 nominal dimensions	AN6227 nominal dimensions Old JIS W1516 nominal number	AN6230 nominal dimensions Old JIS W1517 nominal number	C	A	F	B	H	E	R	G No backup rings
438	65		170.68	170.79	158.67	158.67	158.78	170.79		
			170.64	170.86	158.60	158.60	158.82	170.86		
439	66		177.03	177.14	165.02	165.02	165.13	177.14		
			176.99	177.21	164.95	164.95	165.20	177.21		
440	67		183.38	183.49	171.37	171.37	171.48	183.49		
			183.34	183.56	171.30	171.30	171.55	183.56		
441	68		189.73	189.84	177.72	177.72	177.83	189.84		
			189.69	189.91	177.65	177.65	177.90	189.91		
442	69		196.08	196.19	184.07	184.07	184.18	196.19		
			196.04	196.26	184.00	184.00	184.25	196.26		
443	70		202.43	202.54	190.42	190.42	190.53	202.54		
			202.39	202.61	190.35	190.35	190.60	202.61		
444	71		208.78	208.89	196.77	196.77	196.88	208.89		
			208.74	208.96	196.70	196.70	196.95	208.96		
445	72		215.13	215.24	203.12	203.12	203.23	215.24		
			215.09	215.31	203.05	203.05	203.30	215.31		
446	73		227.83	227.94	215.82	215.82	215.93	227.94		
			227.77	228.01	215.75	215.75	216.00	228.01		
447	74		240.53	240.64	228.52	228.52	228.63	240.64		
			240.47	240.74	228.45	228.45	228.70	240.74		
448	75		253.23	253.34	241.22	241.22	241.33	253.34		
			253.17	253.44	241.15	241.15	241.40	253.44		
449	76		265.93	266.04	253.92	253.92	254.03	266.04	0.88	9.53
			265.87	266.14	253.85	253.85	254.10	266.14	0.51	9.77
450	77		278.63	278.74	266.62	266.62	266.73	278.74		
			278.57	278.84	266.55	266.55	266.80	278.84		
451	78		291.33	291.44	279.32	279.32	279.43	291.44		
			291.27	291.54	279.25	279.25	279.50	291.54		
452	79		304.03	304.14	292.02	292.02	292.13	304.14		
			303.97	304.24	291.95	291.95	292.20	304.24		
453	80		316.73	316.84	304.72	304.72	304.83	316.84		
			316.67	316.94	304.65	304.65	304.90	316.94		
454	81		329.43	329.54	317.42	317.42	317.53	329.54		
			329.37	329.64	317.35	317.35	317.60	329.64		
455	82		342.13	342.24	330.12	330.12	330.23	342.24		
			342.07	342.34	330.05	330.05	330.30	342.34		
456	83		354.83	354.94	342.82	342.82	342.93	354.94		
			354.77	355.04	342.75	342.75	343.00	355.04		
457	84		367.53	367.64	355.52	355.52	355.63	367.64		
			367.47	367.74	355.45	355.45	355.70	367.74		
458	85		380.23	380.34	368.22	368.22	368.33	380.34		
			380.17	380.44	368.15	368.15	368.40	380.44		
459	86		392.93	393.04	380.92	380.92	381.03	393.04		
			392.87	393.14	380.85	380.85	381.10	393.14		
460	87		405.63	405.74	393.62	393.62	393.73	405.74		
			405.57	405.84	393.55	393.55	393.80	405.84		

22. O-Ring Dimension Quick Chart


(1) Relationship Between O-Ring Inside Diameter and Thickness

The relationship between inside diameter and thickness for NOK O-rings is shown here.


JIS B 2401-1

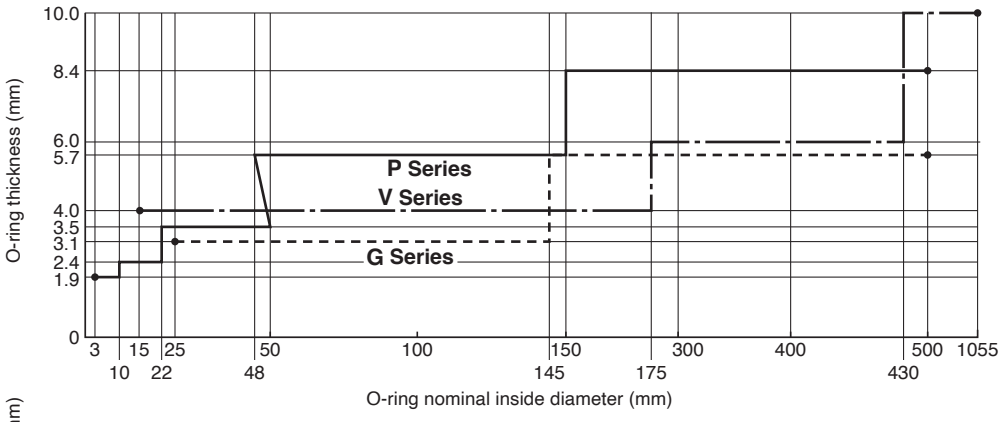


NOK S
NOK SS

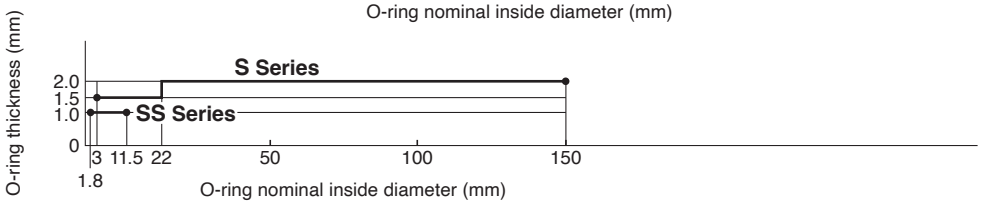


Old JASO F404

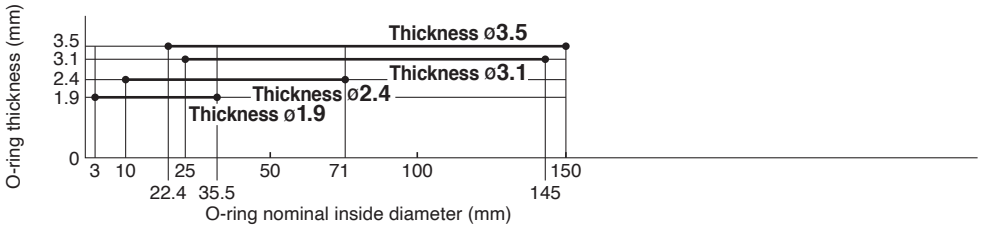


AS568
(001 - 475)

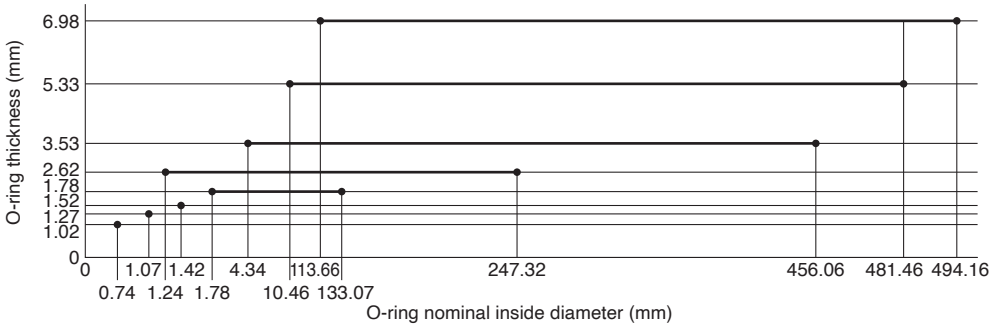

AS568
(901 - 932)

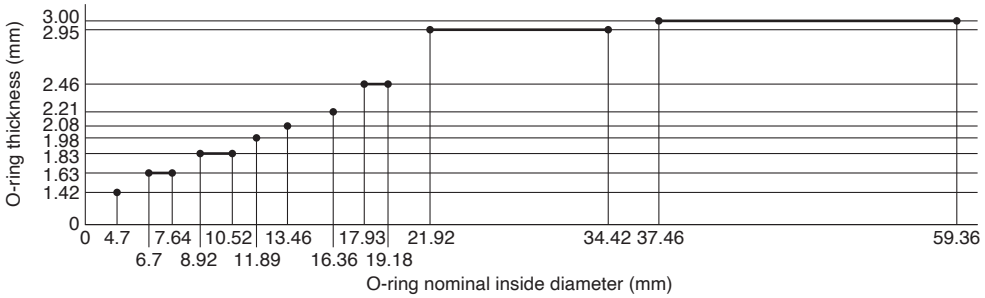

ISO Equivalent
(Static Applications)

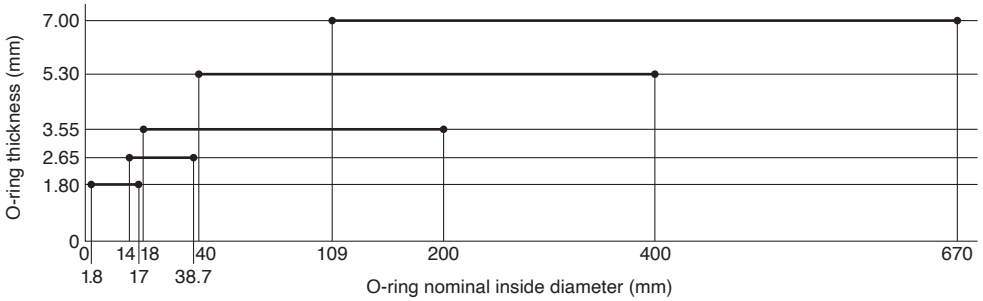

(2) Simplified Dimension Table (list sorted by inside diameter)

Inside diameter d0	Outside diameter D	Thickness W	Dimension code	Applicable standard	Page listed
0.74	2.78	1.02	CO 8424	AS568	38
1.07	3.61	1.27	CO 3387	AS568	38
1.24	6.48	2.62	CO 8485	AS568	39
1.42	4.46	1.52	CO 3388	AS568	38
1.78	5.34	1.78	CO 5146	AS568	38
1.80	3.80	1.00	CO 3325	SS	36
1.80	5.40	1.80	CO 7200	ISO	54
2.00	4.00	1.00	CO 2956	SS	36
2.00	5.60	1.80	CO 7201	ISO	54
2.06	7.30	2.62	CO 8464	AS568	39
2.24	5.84	1.80	CO 7202	ISO	54
2.50	5.50	1.50	CO 0500	S	34
2.50	4.50	1.00	CO 3700	SS	36
2.50	6.10	1.80	CO 7203	ISO	54
2.57	6.13	1.78	CO 3052	AS568	38
2.80	6.60	1.90	CO 00000	P	22
2.80	6.40	1.80	CO 7204	ISO	54
2.84	8.08	2.62	CO 8465	AS568	39
2.90	6.46	1.78	CO 0400	AS568	38
3.00	5.00	1.00	CO 3835	SS	36
3.15	6.75	1.80	CO 7205	ISO	54
3.50	6.50	1.50	CO 0501	S	34
3.50	5.50	1.00	DO 1127	SS	36
3.55	7.15	1.80	CO 7206	ISO	54
3.63	8.87	2.62	CO 8466	AS568	39
3.68	7.24	1.78	CO 0401	AS568	38
3.75	7.35	1.80	CO 7207	ISO	54
3.80	7.60	1.90	CO 00001	P	22
4.00	6.00	1.00	CO 7820	SS	36
4.00	7.60	1.80	CO 7208	ISO	54
4.34	11.40	3.53	CO 8471	AS568	40
4.42	9.66	2.62	CO 8467	AS568	39
4.47	8.03	1.78	CO 0402	AS568	38
4.50	7.50	1.50	CO 0502	S	34
4.50	6.50	1.00	CO 3729	SS	36
4.50	8.10	1.80	CO 1012	ISO	54
4.70	7.54	1.42	CO 5480	AS568	45
4.80	8.60	1.90	CO 00002	P	22
4.87	8.47	1.80	CO 7209	ISO	54
5.00	7.00	1.00	CO 3370	SS	36
5.00	8.60	1.80	CO 7210	ISO	54
5.15	8.75	1.80	CO 7211	ISO	54
5.23	10.47	2.62	CO 6006	AS568	39
5.28	8.84	1.78	CO 0403	AS568	38
5.30	8.90	1.80	CO 7212	ISO	54
5.50	8.50	1.50	CO 0503	S	34
5.50	7.50	1.00	CO 3765	SS	36
5.60	9.20	1.80	CO 6868	ISO	54
5.80	9.60	1.90	CO 00003	P	22
5.94	13.00	3.53	CO 8472	AS568	40
6.00	8.00	1.00	CO 3216	SS	36
6.00	9.60	1.80	CO 3026	ISO	54
6.02	11.26	2.62	CO 8468	AS568	39
6.07	9.63	1.78	CO 0404	AS568	38
6.07	9.33	1.63	CO 3091	AS568	45
6.30	9.90	1.80	CO 7213	ISO	54
6.50	9.50	1.50	CO 0504	S	34
6.50	8.50	1.00	CO 8846	SS	36
6.70	10.30	1.80	CO 7038	ISO	54
6.80	10.60	1.90	CO 00004	P	22
6.90	10.50	1.80	CO 7214	ISO	54
7.00	9.00	1.00	CO 5497	SS	36
7.10	10.70	1.80	CO 7215	ISO	54
7.50	10.50	1.50	CO 0505	S	34
7.50	9.50	1.00	CO 4275	SS	36
7.50	11.10	1.80	CO 7216	ISO	54
7.52	14.58	3.53	CO 4527	AS568	40
7.59	12.83	2.62	CO 3084	AS568	39
7.64	10.90	1.63	CO 7600	AS568	45
7.65	11.21	1.78	CO 0405	AS568	38
7.80	11.60	1.90	CO 00005	P	22
8.00	10.00	1.00	CO 7044	SS	36
8.00	11.60	1.80	CO 7217	ISO	54
8.50	11.50	1.50	CO 0506	S	34
8.50	10.50	1.00	CO 4945	SS	36
8.50	12.10	1.80	CO 7218	ISO	54
8.75	12.35	1.80	CO 7219	ISO	54
8.80	12.60	1.90	CO 00006	P	22
8.92	12.58	1.83	CO 3597	AS568	45
9.00	11.00	1.00	CO 7949	SS	36
9.00	12.60	1.80	CO 1061	ISO	54
9.12	16.18	3.53	CO 7048	AS568	40
9.19	14.43	2.62	CO 0406	AS568	39
9.25	12.81	1.78	CO 0407	AS568	38
9.50	12.50	1.50	CO 0507	S	34
9.50	11.50	1.00	CO 8847	SS	36
9.50	13.10	1.80	CO 7221	ISO	54
9.80	13.60	1.90	CO 00007	P	22
9.80	14.60	2.40	CO 00008	P	22
10.00	12.00	1.00	CO 8848	SS	36
10.00	13.60	1.80	CO 7222	ISO	54
10.46	21.12	5.33	CO 8486	AS568	42
10.50	12.50	1.00	CO 8849	SS	36
10.52	14.18	1.83	CO 1087	AS568	45
10.60	14.20	1.80	CO 7223	ISO	54
10.69	17.75	3.53	CO 7049	AS568	40
10.70	13.70	1.50	CO 0508	S	34
10.77	16.01	2.62	CO 0408	AS568	39
10.80	15.60	2.40	CO 00009	P	22
10.82	14.38	1.78	CO 3174	AS568	38
11.00	15.80	2.40	CO 00010	P	22
11.00	13.00	1.00	CO 5952	SS	36
11.00	14.80	1.90	CO 0600	JASO	46
11.20	14.80	1.80	CO 7224	ISO	54
11.50	14.50	1.50	CO 0509	S	34
11.50	13.50	1.00	CO 8850	SS	36
11.80	16.60	2.40	CO 00011	P	22
11.80	15.40	1.80	CO 1109	ISO	54
11.89	15.85	1.98	CO 3604	AS568	45
12.00	15.00	1.50	CO 0510	S	34
12.06	22.72	5.33	CO 8487	AS568	42
12.29	19.35	3.53	CO 8460	AS568	40
12.30	17.10	2.40	CO 00012	P	22
12.30	16.10	1.90	CO 0601	JASO	46
12.37	17.61	2.62	CO 0409	AS568	39
12.42	15.98	1.78	CO 1119	AS568	38
12.50	16.10	1.80	CO 7225	ISO	54
13.00	16.80	1.90	CO 0602	JASO	46
13.00	17.80	2.40	CO 0603	JASO	48
13.20	16.80	1.80	CO 7226	ISO	54
13.46	17.62	2.08	CO 8804	AS568	45
13.50	16.50	1.50	CO 0511	S	34
13.64	24.30	5.33	CO 8488	AS568	42
13.80	18.60	2.40	CO 00013	P	22
13.80	17.60	1.90	CO 0604	JASO	46
13.87	20.93	3.53	CO 7059	AS568	40
13.94	19.18	2.62	CO 0410	AS568	39
14.00	17.56	1.78	CO 1140	AS568	38
14.00	17.60	1.80	CO 3441	ISO	54
14.00	19.30	2.65	CO 7228	ISO	54
14.50	17.50	1.50	CO 0512	S	34
14.50	22.50	4.00	CO 00300	V	37
14.80	19.60	2.40	CO 00014	P	22
14.80	18.60	1.90	CO 0605	JASO	46
15.00	18.60	1.80	CO 6822	ISO	54
15.00	20.30	2.65	CO 7229	ISO	54
15.24	25.90	5.33	CO 4082	AS568	42
15.47	22.53	3.53	CO 5250	AS568	40
15.50	18.50	1.50	CO 0513	S	34
15.54	20.78	2.62	CO 0411	AS568	39

*In the table above, the following indications are used:
・Former JASO → JASO ・ISO equivalent → ISO

Even for O-rings for the dimensions given in this table, it may be necessary to prepare new tooling depending on the material used. For more details, please refer to the page on which the O-ring is listed.

Inside diameter d0	Outside diameter D	Thickness W	Dimension code	Applicable standard	Page listed
15.60	19.16	1.78	CO 3035	AS568	38
15.80	20.60	2.40	CO 00015	P	22
15.80	19.60	1.90	CO 0606	JASO	46
16.00	19.60	1.80	CO 6861	ISO	54
16.00	21.30	2.65	CO 7230	ISO	54
16.36	20.78	2.21	CO 1165	AS568	45
16.80	21.60	2.40	CO 0608	JASO	48
16.80	20.60	1.90	CO 0607	JASO	46
16.81	27.47	5.33	CO 8480	AS568	42
17.00	20.60	1.80	CO 7227	ISO	54
17.00	22.30	2.65	CO 7231	ISO	54
17.04	24.10	3.53	CO 8461	AS568	40
17.12	22.36	2.62	CO 0412	AS568	39
17.17	20.73	1.78	CO 1179	AS568	38
17.50	20.50	1.50	CO 0514	S	34
17.80	22.60	2.40	CO 00016	P	22
17.80	21.60	1.90	CO 0609	JASO	46
17.93	22.85	2.46	CO 8805	AS568	45
18.00	23.30	2.65	CO 7232	ISO	54
18.00	25.10	3.55	CO 7251	ISO	54
18.42	29.08	5.33	CO 8481	AS568	42
18.64	25.70	3.53	CO 0413	AS568	40
18.72	23.96	2.62	CO 0414	AS568	39
18.77	22.33	1.78	CO 1203	AS568	38
18.80	22.60	1.90	CO 0610	JASO	46
18.80	23.60	2.40	CO 0611	JASO	48
19.00	24.30	2.65	CO 7233	ISO	54
19.00	26.10	3.55	CO 7252	ISO	54
19.18	24.10	2.46	CO 1206	AS568	45
19.50	22.50	1.50	CO 0515	S	34
19.80	24.60	2.40	CO 00017	P	22
19.80	23.60	1.90	CO 0612	JASO	46
19.99	30.65	5.33	CO 7777	AS568	42
20.00	25.30	2.65	CO 7234	ISO	54
20.00	27.10	3.55	CO 7253	ISO	54
20.22	27.28	3.53	CO 0415	AS568	40
20.29	25.53	2.62	CO 4370	AS568	39
20.35	23.91	1.78	CO 1225	AS568	38
20.80	25.60	2.40	CO 00018	P	22
21.00	24.80	1.90	CO 0613	JASO	46
21.20	26.50	2.65	CO 7235	ISO	54
21.20	28.30	3.55	CO 7254	ISO	54
21.50	24.50	1.50	CO 0516	S	34
21.59	32.25	5.33	CO 8482	AS568	42
21.70	28.70	3.50	CO 00019	P	22
21.80	26.60	2.40	CO 00020	P	22
21.82	28.88	3.53	CO 0416	AS568	40
21.89	27.13	2.62	CO 1240	AS568	39
21.90	25.90	2.00	CO 0517	S	34
21.92	27.82	2.95	CO 8234	AS568	45
21.95	25.51	1.78	CO 1241	AS568	38
22.10	25.90	1.90	CO 0614	JASO	46
22.10	29.10	3.50	CO 00021	P	22
22.10	26.90	2.40	CO 0615	JASO	48
22.40	27.70	2.65	CO 7236	ISO	54
22.40	29.50	3.55	CO 7255	ISO	54
23.16	33.82	5.33	CO 6064	AS568	42
23.30	27.10	1.90	CO 0616	JASO	46
23.30	28.10	2.40	CO 0617	JASO	48
23.39	30.45	3.53	CO 0417	AS568	40
23.46	28.70	2.62	CO 6065	AS568	39
23.47	29.37	2.95	CO 1253	AS568	45
23.50	27.50	2.00	CO 0518	S	34
23.50	31.50	4.00	CO 00301	V	37
23.52	27.08	1.78	CO 3037	AS568	38
23.60	28.90	2.65	CO 7237	ISO	54
23.60	30.70	3.55	CO 7256	ISO	54
23.70	30.70	3.50	CO 00022	P	22
24.40	30.60	3.10	CO 00200	G	30
24.50	28.50	2.00	CO 0519	S	34

Inside diameter d0	Outside diameter D	Thickness W	Dimension code	Applicable standard	Page listed
24.70	31.70	3.50	CO 00023	P	22
24.70	29.50	2.40	CO 0619	JASO	48
24.70	28.50	1.90	CO 0618	JASO	46
24.76	35.42	5.33	CO 3025	AS568	42
24.99	32.05	3.53	CO 0418	AS568	41
25.00	30.30	2.65	CO 7238	ISO	54
25.00	32.10	3.55	CO 7257	ISO	54
25.04	30.94	2.95	CO 8806	AS568	45
25.07	30.31	2.62	CO 3805	AS568	39
25.12	28.68	1.78	CO 4368	AS568	38
25.20	32.20	3.50	CO 00024	P	22
25.50	29.50	2.00	CO 0520	S	34
25.70	32.70	3.50	CO 00025	P	22
25.80	31.10	2.65	CO 7239	ISO	54
25.80	32.90	3.55	CO 7258	ISO	54
26.20	31.00	2.40	CO 0621	JASO	48
26.20	30.00	1.90	CO 0620	JASO	46
26.34	37.00	5.33	CO 8483	AS568	42
26.50	31.80	2.65	CO 7240	ISO	54
26.50	33.60	3.55	CO 7259	ISO	54
26.57	33.63	3.53	CO 0419	AS568	41
26.59	32.49	2.95	CO 2998	AS568	45
26.64	31.88	2.62	CO 3601	AS568	39
26.70	30.26	1.78	CO 3173	AS568	38
27.50	31.50	2.00	CO 0521	S	34
27.70	34.70	3.50	CO 00026	P	22
27.70	31.50	1.90	CO 0622	JASO	46
27.70	32.50	2.40	CO 0623	JASO	48
27.94	38.60	5.33	CO 4337	AS568	42
28.00	33.30	2.65	CO 7241	ISO	54
28.00	35.10	3.55	CO 7260	ISO	54
28.17	35.23	3.53	CO 0420	AS568	41
28.24	33.48	2.62	CO 4128	AS568	39
28.30	31.86	1.78	CO 1302	AS568	38
28.50	32.50	2.00	CO 0522	S	34
28.70	35.70	3.50	CO 00027	P	22
29.20	36.20	3.50	CO 00028	P	22
29.40	35.60	3.10	CO 00201	G	30
29.50	33.50	2.00	CO 0523	S	34
29.51	40.17	5.33	CO 7778	AS568	42
29.70	36.70	3.50	CO 00029	P	22
29.70	33.50	1.90	CO 0624	JASO	46
29.70	34.50	2.40	CO 0625	JASO	48
29.74	36.80	3.53	CO 0421	AS568	41
29.74	35.64	2.95	CO 1315	AS568	45
29.82	35.06	2.62	CO 3105	AS568	39
29.87	33.43	1.78	CO 3636	AS568	38
30.00	35.30	2.65	CO 7242	ISO	54
30.00	37.10	3.55	CO 7261	ISO	54
30.70	37.70	3.50	CO 00030	P	22
31.00	35.00	2.00	CO 0524	S	34
31.12	41.78	5.33	CO 4081	AS568	42
31.20	36.00	2.40	CO 0627	JASO	48
31.20	35.00	1.90	CO 0626	JASO	46
31.20	38.20	3.50	CO 00031	P	22
31.34	38.40	3.53	CO 0422	AS568	41
31.42	36.66	2.62	CO 3112	AS568	39
31.47	35.03	1.78	CO 3093	AS568	38
31.50	35.50	2.00	CO 0525	S	34
31.50	36.80	2.65	CO 7243	ISO	54
31.50	38.60	3.55	CO 7262	ISO	54
31.70	38.70	3.50	CO 00032	P	22
32.50	37.80	2.65	CO 7244	ISO	54
32.50	39.60	3.55	CO 7263	ISO	54
32.69	43.35	5.33	CO 8484	AS568	42
32.92	39.98	3.53	CO 0423	AS568	41
32.99	38.23	2.62	CO 3230	AS568	39
33.05	36.61	1.78	CO 7771	AS568	38
33.20	38.00	2.40	CO 0629	JASO	48
33.20	37.00	1.90	CO 0628	JASO	46

*In the table above, the following indications are used:
・Former JASO → JASO ・ISO equivalent → ISO

Inside diameter d0	Outside diameter D	Thickness W	Dimension code	Applicable standard	Page listed
33.50	37.50	2.00	CO 0526	S	34
33.50	41.50	4.00	CO 00302	V	37
33.50	38.80	2.65	CO 7245	ISO	54
33.50	40.60	3.55	CO 7264	ISO	54
33.70	40.70	3.50	CO 00033	P	22
34.29	44.95	5.33	CO 4070	AS568	42
34.40	40.60	3.10	CO 00202	G	30
34.42	40.32	2.95	CO 8807	AS568	45
34.50	38.50	2.00	CO 0527	S	34
34.50	39.80	2.65	CO 7246	ISO	54
34.50	41.60	3.55	CO 7265	ISO	54
34.52	41.58	3.53	CO 0424	AS568	41
34.59	39.83	2.62	CO 3449	AS568	39
34.65	38.21	1.78	CO 3092	AS568	38
34.70	41.70	3.50	CO 00034	P	22
35.00	39.00	2.00	CO 0528	S	34
35.20	42.20	3.50	CO 00035	P	22
35.20	39.00	1.90	CO 0630	JASO	46
35.20	40.00	2.40	CO 0631	JASO	48
35.50	39.50	2.00	CO 0529	S	34
35.50	40.80	2.65	CO 7247	ISO	54
35.50	42.60	3.55	CO 7266	ISO	54
35.70	42.70	3.50	CO 00036	P	22
36.09	43.15	3.53	CO 0425	AS568	41
36.17	41.41	2.62	CO 1367	AS568	39
36.50	41.80	2.65	CO 7248	ISO	54
36.50	43.60	3.55	CO 7267	ISO	54
37.20	42.00	2.40	CO 0632	JASO	48
37.46	48.12	5.33	CO 0427	AS568	42
37.46	43.46	3.00	CO 3640	AS568	45
37.50	41.50	2.00	CO 0530	S	34
37.50	42.80	2.65	CO 7249	ISO	54
37.50	44.60	3.55	CO 7268	ISO	54
37.69	44.75	3.53	CO 0426	AS568	41
37.70	44.70	3.50	CO 00037	P	22
37.77	43.01	2.62	CO 1380	AS568	39
37.82	41.38	1.78	CO 6134	AS568	38
38.50	42.50	2.00	CO 0531	S	34
38.70	45.70	3.50	CO 00038	P	22
38.70	44.00	2.65	CO 7250	ISO	54
38.70	45.80	3.55	CO 7269	ISO	54
39.34	44.58	2.62	CO 3851	AS568	39
39.40	45.60	3.10	CO 00203	G	30
39.50	43.50	2.00	CO 0532	S	34
39.50	47.50	4.00	CO 00303	V	37
39.70	46.70	3.50	CO 00039	P	22
39.70	44.50	2.40	CO 0633	JASO	48
40.00	47.10	3.55	CO 7270	ISO	54
40.00	50.60	5.30	CO 7327	ISO	55
40.64	51.30	5.33	CO 0428	AS568	42
40.70	47.70	3.50	CO 00040	P	22
40.87	47.93	3.53	CO 0350	AS568	41
40.94	46.18	2.62	CO 4408	AS568	39
41.00	44.56	1.78	CO 3191	AS568	38
41.20	48.30	3.55	CO 7271	ISO	54
41.20	51.80	5.30	CO 7328	ISO	55
41.50	45.50	2.00	CO 0533	S	34
41.70	48.70	3.50	CO 00041	P	22
42.20	47.00	2.40	CO 0634	JASO	48
42.50	49.60	3.55	CO 7272	ISO	54
42.50	53.10	5.30	CO 7329	ISO	55
42.52	47.76	2.62	CO 6151	AS568	39
43.50	47.50	2.00	CO 0534	S	35
43.69	49.69	3.00	CO 3706	AS568	45
43.70	50.70	3.50	CO 00042	P	22
43.70	50.80	3.55	CO 7273	ISO	54
43.70	54.30	5.30	CO 7330	ISO	55
43.82	54.48	5.33	CO 0429	AS568	42
44.04	51.10	3.53	CO 0351	AS568	41
44.12	49.36	2.62	CO 6155	AS568	39
44.17	47.73	1.78	CO 5191	AS568	38
44.40	50.60	3.10	CO 00204	G	30
44.50	48.50	2.00	CO 0535	S	35
44.70	49.50	2.40	CO 0635	JASO	48
44.70	51.70	3.50	CO 00043	P	22
45.00	52.10	3.55	CO 7274	ISO	54
45.00	55.60	5.30	CO 4643	ISO	55
45.50	49.50	2.00	CO 0536	S	35
45.69	50.93	2.62	CO 3152	AS568	39
45.70	52.70	3.50	CO 00044	P	22
46.20	53.30	3.55	CO 7275	ISO	54
46.20	56.80	5.30	CO 7331	ISO	55
46.99	57.65	5.33	CO 0430	AS568	42
47.20	52.00	2.40	CO 0636	JASO	48
47.22	54.28	3.53	CO 0352	AS568	41
47.29	52.53	2.62	CO 1433	AS568	39
47.35	50.91	1.78	CO 3235	AS568	38
47.50	51.50	2.00	CO 0537	S	35
47.50	54.60	3.55	CO 7276	ISO	54
47.50	58.10	5.30	CO 7332	ISO	55
47.60	59.00	5.70	CO 00045	P	24
47.70	54.70	3.50	CO 00046	P	22
48.70	55.70	3.50	CO 00047	P	24
48.70	55.80	3.55	CO 7277	ISO	54
48.70	59.30	5.30	CO 7333	ISO	55
48.90	54.14	2.62	CO 8469	AS568	39
49.40	55.60	3.10	CO 00205	G	30
49.50	53.50	2.00	CO 0538	S	35
49.60	61.00	5.70	CO 00048	P	24
49.70	56.70	3.50	CO 00049	P	24
49.70	54.50	2.40	CO 0637	JASO	48
50.00	57.10	3.55	CO 7278	ISO	54
50.00	60.60	5.30	CO 7334	ISO	55
50.16	60.82	5.33	CO 0431	AS568	42
50.39	57.45	3.53	CO 0353	AS568	41
50.47	55.71	2.62	CO 4330	AS568	39
50.52	54.08	1.78	CO 5346	AS568	38
51.50	58.60	3.55	CO 7279	ISO	54
51.50	62.10	5.30	CO 7335	ISO	55
51.60	63.00	5.70	CO 00050	P	24
52.07	57.31	2.62	CO 1461	AS568	39
52.50	56.50	2.00	CO 0539	S	35
52.60	59.60	3.50	CO 0639	JASO	52
52.60	64.00	5.70	CO 00051	P	24
52.60	57.40	2.40	CO 0638	JASO	48
53.00	60.10	3.55	CO 7280	ISO	54
53.00	63.60	5.30	CO 7336	ISO	55
53.09	59.09	3.00	CO 8808	AS568	45
53.34	64.00	5.33	CO 0432	AS568	42
53.57	60.63	3.53	CO 0354	AS568	41
53.64	58.88	2.62	CO 3707	AS568	39
53.70	57.26	1.78	CO 1467	AS568	38
54.40	60.60	3.10	CO 00206	G	30
54.50	58.50	2.00	CO 0540	S	35
54.50	62.50	4.00	CO 00304	V	37
54.50	61.60	3.55	CO 7281	ISO	54
54.50	65.10	5.30	CO 7337	ISO	55
54.60	66.00	5.70	CO 00052	P	24
55.24	60.48	2.62	CO 6189	AS568	39
55.50	59.50	2.00	CO 0541	S	35
55.60	60.40	2.40	CO 0640	JASO	48
55.60	67.00	5.70	CO 00053	P	24
55.60	62.60	3.50	CO 0641	JASO	52
56.00	63.10	3.55	CO 7282	ISO	54
56.00	66.60	5.30	CO 7338	ISO	55
56.52	67.18	5.33	CO 0433	AS568	42
56.74	63.80	3.53	CO 0355	AS568	41
56.82	62.06	2.62	CO 3107	AS568	39
56.87	60.43	1.78	CO 7772	AS568	38
57.60	69.00	5.70	CO 00054	P	24

*In the table above, the following indications are used:
・Former JASO → JASO ・ISO equivalent → ISO

Even for O-rings for the dimensions given in this table, it may be necessary to prepare new tooling depending on the material used. For more details, please refer to the page on which the O-ring is listed.

Inside diameter d0	Outside diameter D	Thickness W	Dimension code	Applicable standard	Page listed
58.00	65.10	3.55	CO 7283	ISO	54
58.00	68.60	5.30	CO 7339	ISO	55
58.42	63.66	2.62	CO 6202	AS568	39
59.36	65.36	3.00	CO 8809	AS568	45
59.40	65.60	3.10	CO 00207	G	30
59.50	63.50	2.00	CO 0542	S	35
59.60	71.00	5.70	CO 00055	P	24
59.60	64.40	2.40	CO 0642	JASO	48
59.60	66.60	3.50	CO 0643	JASO	52
59.69	70.35	5.33	CO 0434	AS568	43
59.92	66.98	3.53	CO 0356	AS568	41
59.99	65.23	2.62	CO 6210	AS568	39
60.00	67.10	3.55	CO 7284	ISO	54
60.00	70.60	5.30	CO 7340	ISO	55
60.05	63.61	1.78	CO 4714	AS568	38
61.50	68.60	3.55	CO 7285	ISO	54
61.50	72.10	5.30	CO 7341	ISO	55
61.59	66.83	2.62	CO 7872	AS568	39
61.60	73.00	5.70	CO 00056	P	24
62.50	66.50	2.00	CO 0543	S	35
62.60	67.40	2.40	CO 0644	JASO	48
62.60	74.00	5.70	CO 00057	P	24
62.60	69.60	3.50	CO 0645	JASO	52
62.86	73.52	5.33	CO 0435	AS568	43
63.00	70.10	3.55	CO 7286	ISO	54
63.00	73.60	5.30	CO 7342	ISO	55
63.09	70.15	3.53	CO 0357	AS568	41
63.17	68.41	2.62	CO 4253	AS568	39
63.22	66.78	1.78	CO 8462	AS568	38
64.40	70.60	3.10	CO 00208	G	30
64.50	68.50	2.00	CO 0544	S	35
64.60	76.00	5.70	CO 00058	P	24
64.77	70.01	2.62	CO 1518	AS568	40
65.00	72.10	3.55	CO 7287	ISO	54
65.00	75.60	5.30	CO 7343	ISO	55
66.04	76.70	5.33	CO 0436	AS568	43
66.27	73.33	3.53	CO 0358	AS568	41
66.34	71.58	2.62	CO 3148	AS568	40
66.40	69.96	1.78	CO 8231	AS568	38
66.50	70.50	2.00	CO 0545	S	35
66.60	71.40	2.40	CO 0646	JASO	48
66.60	78.00	5.70	CO 00059	P	24
66.60	73.60	3.50	CO 0647	JASO	52
67.00	74.10	3.55	CO 7288	ISO	54
67.00	77.60	5.30	CO 7344	ISO	55
67.94	73.18	2.62	CO 3103	AS568	40
69.00	77.00	4.00	CO 00305	V	37
69.00	76.10	3.55	CO 7289	ISO	54
69.00	79.60	5.30	CO 7345	ISO	55
69.22	79.88	5.33	CO 0437	AS568	43
69.40	75.60	3.10	CO 00209	G	30
69.44	76.50	3.53	CO 0359	AS568	41
69.50	73.50	2.00	CO 0546	S	35
69.52	74.76	2.62	CO 4718	AS568	40
69.57	73.13	1.78	CO 4699	AS568	38
69.60	81.00	5.70	CO 00060	P	24
70.50	74.50	2.00	CO 0547	S	35
70.60	77.60	3.50	CO 0649	JASO	52
70.60	75.40	2.40	CO 0648	JASO	48
70.60	82.00	5.70	CO 00061	P	24
71.00	78.10	3.55	CO 7290	ISO	54
71.00	81.60	5.30	CO 7346	ISO	55
71.12	76.36	2.62	CO 6254	AS568	40
72.39	83.05	5.33	CO 0438	AS568	43
72.62	79.68	3.53	CO 0360	AS568	41
72.69	77.93	2.62	CO 6261	AS568	40
72.75	76.31	1.78	CO 4457	AS568	38
73.00	80.10	3.55	CO 7291	ISO	54
73.00	83.60	5.30	CO 7347	ISO	55
74.40	80.60	3.10	CO 00210	G	30
74.50	78.50	2.00	CO 0548	S	35
74.60	86.00	5.70	CO 00062	P	24
74.60	81.60	3.50	CO 0650	JASO	52
75.00	82.10	3.55	CO 7292	ISO	55
75.00	85.60	5.30	CO 7348	ISO	55
75.56	86.22	5.33	CO 0439	AS568	43
75.79	82.85	3.53	CO 0361	AS568	41
75.87	81.11	2.62	CO 6268	AS568	40
75.92	79.48	1.78	CO 7129	AS568	38
77.50	84.60	3.55	CO 7293	ISO	55
77.50	88.10	5.30	CO 7349	ISO	55
78.74	89.40	5.33	CO 0440	AS568	43
78.97	86.03	3.53	CO 0362	AS568	41
79.40	85.60	3.10	CO 00211	G	30
79.50	83.50	2.00	CO 0549	S	35
79.60	91.00	5.70	CO 00063	P	24
79.60	86.60	3.50	CO 0651	JASO	52
80.00	87.10	3.55	CO 7294	ISO	55
80.00	90.60	5.30	CO 7350	ISO	55
81.92	92.58	5.33	CO 0441	AS568	43
82.14	89.20	3.53	CO 0363	AS568	41
82.22	87.46	2.62	CO 6276	AS568	40
82.27	85.83	1.78	CO 4335	AS568	38
82.50	89.60	3.55	CO 7295	ISO	55
82.50	93.10	5.30	CO 7351	ISO	55
84.00	92.00	4.00	CO 00306	V	37
84.40	90.60	3.10	CO 00212	G	30
84.50	88.50	2.00	CO 0550	S	35
84.60	91.60	3.50	CO 0652	JASO	52
84.60	96.00	5.70	CO 00064	P	24
85.00	92.10	3.55	CO 7296	ISO	55
85.00	95.60	5.30	CO 7352	ISO	55
85.09	95.75	5.33	CO 0442	AS568	43
85.32	92.38	3.53	CO 0364	AS568	41
87.50	94.60	3.55	CO 7297	ISO	55
87.50	98.10	5.30	CO 7353	ISO	55
88.26	98.92	5.33	CO 0443	AS568	43
88.49	95.55	3.53	CO 0365	AS568	41
88.57	93.81	2.62	CO 3568	AS568	40
88.62	92.18	1.78	CO 3010	AS568	38
89.40	95.60	3.10	CO 00213	G	30
89.50	93.50	2.00	CO 0551	S	35
89.60	101.00	5.70	CO 00065	P	24
89.60	96.60	3.50	CO 0653	JASO	52
90.00	97.10	3.55	CO 7298	ISO	55
90.00	100.60	5.30	CO 7354	ISO	55
91.44	102.10	5.33	CO 0444	AS568	43
91.67	98.73	3.53	CO 0366	AS568	41
92.50	99.60	3.55	CO 7299	ISO	55
92.50	103.10	5.30	CO 7355	ISO	55
94.40	100.60	3.10	CO 00214	G	30
94.50	98.50	2.00	CO 0552	S	35
94.60	106.00	5.70	CO 00066	P	24
94.60	101.60	3.50	CO 0654	JASO	52
94.62	105.28	5.33	CO 0445	AS568	43
94.84	101.90	3.53	CO 0367	AS568	41
94.92	100.16	2.62	CO 4837	AS568	40
94.97	98.53	1.78	CO 8205	AS568	38
95.00	102.10	3.55	CO 7300	ISO	55
95.00	105.60	5.30	CO 7356	ISO	55
97.50	104.60	3.55	CO 7301	ISO	55
97.50	108.10	5.30	CO 7357	ISO	55
97.79	108.45	5.33	CO 0446	AS568	43
98.02	105.08	3.53	CO 0368	AS568	41
99.00	107.00	4.00	CO 00307	V	37
99.40	105.60	3.10	CO 00215	G	30
99.50	103.50	2.00	CO 0553	S	35
99.60	111.00	5.70	CO 00067	P	24
99.60	106.60	3.50	CO 0655	JASO	52
100.00	107.10	3.55	CO 7302	ISO	55

*In the table above, the following indications are used:
・Former JASO → JASO ・ISO equivalent → ISO

Inside diameter d0	Outside diameter D	Thickness W	Dimension code	Applicable standard	Page listed
100.00	110.60	5.30	CO 7358	ISO	55
100.96	111.62	5.33	CO 0447	AS568	43
101.19	108.25	3.53	CO 0369	AS568	41
101.27	106.51	2.62	CO 7031	AS568	40
101.32	104.88	1.78	CO 4251	AS568	38
101.60	113.00	5.70	CO 00068	P	24
103.00	110.10	3.55	CO 7303	ISO	55
103.00	113.60	5.30	CO 7359	ISO	55
104.14	114.80	5.33	CO 0448	AS568	43
104.37	111.43	3.53	CO 0370	AS568	41
104.40	110.60	3.10	CO 00216	G	30
104.50	108.50	2.00	CO 0554	S	35
104.60	116.00	5.70	CO 00069	P	24
105.60	112.60	3.50	CO 0656	JASO	52
106.00	113.10	3.55	CO 7304	ISO	55
106.00	116.60	5.30	CO 7360	ISO	55
107.32	117.98	5.33	CO 0449	AS568	43
107.54	114.60	3.53	CO 0371	AS568	41
107.62	112.86	2.62	CO 1640	AS568	40
107.67	111.23	1.78	CO 4873	AS568	38
109.00	116.10	3.55	CO 7305	ISO	55
109.00	119.60	5.30	CO 7361	ISO	55
109.00	123.00	7.00	CO 7407	ISO	56
109.40	115.60	3.10	CO 00217	G	30
109.50	113.50	2.00	CO 0555	S	35
109.60	121.00	5.70	CO 00070	P	24
110.49	121.15	5.33	CO 0450	AS568	43
110.72	117.78	3.53	CO 0372	AS568	41
111.50	115.50	2.00	CO 0556	S	35
111.60	123.00	5.70	CO 00071	P	24
111.60	118.60	3.50	CO 0657	JASO	52
112.00	119.10	3.55	CO 7306	ISO	55
112.00	122.60	5.30	CO 7362	ISO	55
112.00	126.00	7.00	CO 7408	ISO	56
113.66	124.32	5.33	CO 0451	AS568	43
113.66	127.62	6.98	CO 0487	AS568	44
113.89	120.95	3.53	CO 0373	AS568	41
113.97	119.21	2.62	CO 5357	AS568	40
114.02	117.58	1.78	CO 4947	AS568	38
114.40	120.60	3.10	CO 00218	G	30
114.50	118.50	2.00	CO 0557	S	35
114.60	126.00	5.70	CO 00072	P	24
115.00	122.10	3.55	CO 7307	ISO	55
115.00	125.60	5.30	CO 7363	ISO	55
115.00	129.00	7.00	CO 7409	ISO	56
116.84	127.50	5.33	CO 6340	AS568	43
116.84	130.80	6.98	CO 0452	AS568	44
117.07	124.13	3.53	CO 0374	AS568	41
117.60	124.60	3.50	CO 0658	JASO	52
118.00	125.10	3.55	CO 7308	ISO	55
118.00	128.60	5.30	CO 7364	ISO	55
118.00	132.00	7.00	CO 7410	ISO	56
119.00	127.00	4.00	CO 00308	V	37
119.40	125.60	3.10	CO 00219	G	30
119.50	123.50	2.00	CO 0558	S	35
119.60	131.00	5.70	CO 00073	P	24
120.02	130.68	5.33	CO 7779	AS568	43
120.02	133.98	6.98	CO 0453	AS568	44
120.24	127.30	3.53	CO 1672	AS568	41
120.32	125.56	2.62	CO 6356	AS568	40
120.37	123.93	1.78	CO 4252	AS568	39
122.00	129.10	3.55	CO 7309	ISO	55
122.00	132.60	5.30	CO 7365	ISO	55
122.00	136.00	7.00	CO 7411	ISO	56
123.19	133.85	5.33	CO 4133	AS568	43
123.19	137.15	6.98	CO 0454	AS568	44
123.42	130.48	3.53	CO 1680	AS568	41
124.40	130.60	3.10	CO 00220	G	30
124.50	128.50	2.00	CO 0559	S	35
124.60	136.00	5.70	CO 00074	P	24

Inside diameter d0	Outside diameter D	Thickness W	Dimension code	Applicable standard	Page listed
124.60	131.60	3.50	CO 0659	JASO	52
125.00	132.10	3.55	CO 7310	ISO	55
125.00	135.60	5.30	CO 7366	ISO	55
125.00	139.00	7.00	CO 7412	ISO	56
126.36	137.02	5.33	CO 6366	AS568	43
126.36	140.32	6.98	CO 0455	AS568	44
126.59	133.65	3.53	CO 1691	AS568	41
126.67	131.91	2.62	CO 7811	AS568	40
126.72	130.28	1.78	CO 8463	AS568	39
128.00	135.10	3.55	CO 7311	ISO	55
128.00	138.60	5.30	CO 7367	ISO	55
128.00	142.00	7.00	CO 7413	ISO	56
129.40	135.60	3.10	CO 00221	G	30
129.50	133.50	2.00	CO 0560	S	35
129.54	140.20	5.33	CO 4205	AS568	43
129.54	143.50	6.98	CO 0456	AS568	44
129.60	141.00	5.70	CO 00075	P	24
129.77	136.83	3.53	CO 1705	AS568	41
131.50	135.50	2.00	CO 0561	S	35
131.60	143.00	5.70	CO 00076	P	24
131.60	138.60	3.50	CO 0660	JASO	52
132.00	139.10	3.55	CO 7312	ISO	55
132.00	142.60	5.30	CO 7368	ISO	55
132.00	146.00	7.00	CO 7414	ISO	56
132.72	143.38	5.33	CO 5131	AS568	43
132.72	146.68	6.98	CO 0457	AS568	44
132.94	140.00	3.53	CO 1717	AS568	41
133.02	138.26	2.62	CO 1720	AS568	40
133.07	136.63	1.78	CO 4948	AS568	39
134.40	140.60	3.10	CO 00222	G	30
134.50	138.50	2.00	CO 0562	S	35
134.60	146.00	5.70	CO 00077	P	24
135.89	146.55	5.33	CO 6385	AS568	43
135.89	149.85	6.98	CO 0458	AS568	44
136.00	143.10	3.55	CO 7313	ISO	55
136.00	146.60	5.30	CO 7369	ISO	55
136.00	150.00	7.00	CO 7415	ISO	56
136.12	143.18	3.53	CO 4047	AS568	41
139.06	153.02	6.98	CO 0459	AS568	44
139.07	149.73	5.33	CO 5317	AS568	43
139.29	146.35	3.53	CO 1744	AS568	41
139.37	144.61	2.62	CO 4812	AS568	40
139.40	145.60	3.10	CO 00223	G	30
139.50	143.50	2.00	CO 0563	S	35
139.60	151.00	5.70	CO 00078	P	24
139.60	146.60	3.50	CO 0661	JASO	52
140.00	147.10	3.55	CO 7314	ISO	55
140.00	150.60	5.30	CO 7370	ISO	55
140.00	154.00	7.00	CO 7416	ISO	56
142.24	152.90	5.33	CO 7782	AS568	43
142.24	156.20	6.98	CO 0460	AS568	44
142.47	149.53	3.53	CO 1762	AS568	41
144.40	150.60	3.10	CO 00224	G	30
144.50	148.50	2.00	CO 0564	S	35
144.60	156.00	5.70	CO 00079	P	24
145.00	152.10	3.55	CO 7315	ISO	55
145.00	155.60	5.30	CO 7371	ISO	55
145.00	159.00	7.00	CO 7417	ISO	56
145.42	156.08	5.33	CO 4111	AS568	43
145.42	159.38	6.98	CO 0461	AS568	44
145.64	152.70	3.53	CO 1774	AS568	41
145.72	150.96	2.62	CO 7130	AS568	40
148.50	156.50	4.00	CO 00309	V	37
148.59	159.25	5.33	CO 8429	AS568	43
148.59	162.55	6.98	CO 0462	AS568	44
148.82	155.88	3.53	CO 1786	AS568	41
149.30	160.70	5.70	CO 00225	G	30
149.50	153.50	2.00	CO 0565	S	35
149.50	166.30	8.40	CO 00080	P	24
149.60	156.60	3.50	CO 0662	JASO	52

*In the table above, the following indications are used:
・Former JASO → JASO ・ISO equivalent → ISO

Even for O-rings for the dimensions given in this table, it may be necessary to prepare new tooling depending on the material used. For more details, please refer to the page on which the O-ring is listed.

Inside diameter d0	Outside diameter D	Thickness W	Dimension code	Applicable standard	Page listed
149.60	161.00	5.70	CO 00081	P	24
150.00	157.10	3.55	CO 7316	ISO	55
150.00	160.60	5.30	CO 7372	ISO	55
150.00	164.00	7.00	CO 7418	ISO	56
151.76	165.72	6.98	CO 0463	AS568	44
151.77	162.43	5.33	CO 7783	AS568	43
151.99	159.05	3.53	CO 1805	AS568	41
152.07	157.31	2.62	CO 1808	AS568	40
154.30	165.70	5.70	CO 00226	G	30
154.50	171.30	8.40	CO 00082	P	24
155.00	162.10	3.55	CO 7317	ISO	55
155.00	165.60	5.30	CO 7373	ISO	55
155.00	169.00	7.00	CO 7419	ISO	56
158.12	168.78	5.33	CO 7784	AS568	43
158.12	172.08	6.98	CO 0464	AS568	44
158.34	165.40	3.53	CO 1829	AS568	41
158.42	163.66	2.62	CO 1830	AS568	40
159.30	170.70	5.70	CO 00227	G	30
159.50	176.30	8.40	CO 00083	P	24
160.00	167.10	3.55	CO 7318	ISO	55
160.00	170.60	5.30	CO 7374	ISO	55
160.00	174.00	7.00	CO 7420	ISO	56
164.30	175.70	5.70	CO 00228	G	30
164.46	178.42	6.98	CO 0465	AS568	44
164.47	175.13	5.33	CO 7785	AS568	43
164.50	181.30	8.40	CO 00084	P	24
164.69	171.75	3.53	CO 1856	AS568	41
164.77	170.01	2.62	CO 5411	AS568	40
165.00	172.10	3.55	CO 7319	ISO	55
165.00	175.60	5.30	CO 7375	ISO	55
165.00	179.00	7.00	CO 7421	ISO	56
169.30	180.70	5.70	CO 00229	G	30
169.50	186.30	8.40	CO 00085	P	24
170.00	177.10	3.55	CO 7320	ISO	55
170.00	180.60	5.30	CO 7376	ISO	55
170.00	184.00	7.00	CO 7422	ISO	56
170.82	181.48	5.33	CO 7786	AS568	43
170.82	184.78	6.98	CO 0466	AS568	44
171.04	178.10	3.53	CO 1880	AS568	41
171.12	176.36	2.62	CO 6432	AS568	40
173.00	181.00	4.00	CO 00310	V	37
174.30	185.70	5.70	CO 00230	G	30
174.50	191.30	8.40	CO 00086	P	24
175.00	182.10	3.55	CO 7321	ISO	55
175.00	185.60	5.30	CO 7377	ISO	55
175.00	189.00	7.00	CO 7423	ISO	56
177.16	191.12	6.98	CO 0467	AS568	44
177.17	187.83	5.33	CO 7787	AS568	43
177.39	184.45	3.53	CO 1893	AS568	42
177.47	182.71	2.62	CO 6437	AS568	40
179.30	190.70	5.70	CO 00231	G	30
179.50	196.30	8.40	CO 00087	P	24
180.00	187.10	3.55	CO 7322	ISO	55
180.00	190.60	5.30	CO 7378	ISO	55
180.00	194.00	7.00	CO 7424	ISO	56
183.52	194.18	5.33	CO 7819	AS568	43
183.52	197.48	6.98	CO 0468	AS568	44
183.74	190.80	3.53	CO 1915	AS568	42
183.82	189.06	2.62	CO 6445	AS568	40
184.30	195.70	5.70	CO 00232	G	30
184.50	201.30	8.40	CO 00088	P	24
185.00	192.10	3.55	CO 7323	ISO	55
185.00	195.60	5.30	CO 7379	ISO	55
185.00	199.00	7.00	CO 7425	ISO	56
189.30	200.70	5.70	CO 00233	G	30
189.50	206.30	8.40	CO 00089	P	24
189.86	200.52	5.33	CO 3417	AS568	43
189.86	203.82	6.98	CO 0469	AS568	44
190.00	197.10	3.55	CO 7324	ISO	55
190.00	200.60	5.30	CO 7380	ISO	55

Inside diameter d0	Outside diameter D	Thickness W	Dimension code	Applicable standard	Page listed
190.00	204.00	7.00	CO 7426	ISO	56
190.09	197.15	3.53	CO 1931	AS568	42
190.17	195.41	2.62	CO 8470	AS568	40
194.30	205.70	5.70	CO 00234	G	30
194.50	211.30	8.40	CO 00090	P	24
195.00	202.10	3.55	CO 7325	ISO	55
195.00	205.60	5.30	CO 7381	ISO	55
195.00	209.00	7.00	CO 7427	ISO	56
196.22	206.88	5.33	CO 1945	AS568	43
196.22	210.18	6.98	CO 0470	AS568	44
196.44	203.50	3.53	CO 1946	AS568	42
196.52	201.76	2.62	CO 5303	AS568	40
199.30	210.70	5.70	CO 00235	G	30
199.50	216.30	8.40	CO 00091	P	24
200.00	207.10	3.55	CO 7326	ISO	55
200.00	210.60	5.30	CO 7382	ISO	55
200.00	214.00	7.00	CO 7428	ISO	56
202.56	216.52	6.98	CO 0471	AS568	44
202.57	213.23	5.33	CO 7789	AS568	43
202.79	209.85	3.53	CO 1959	AS568	42
202.87	208.11	2.62	CO 7775	AS568	40
204.30	215.70	5.70	CO 01968	G	30
204.50	221.30	8.40	CO 00092	P	26
206.00	216.60	5.30	CO 7383	ISO	55
206.00	220.00	7.00	CO 7429	ISO	56
208.50	225.30	8.40	CO 00093	P	26
208.92	219.58	5.33	CO 7790	AS568	43
209.14	216.20	3.53	CO 1979	AS568	42
209.22	214.46	2.62	CO 5270	AS568	40
209.30	220.70	5.70	CO 00236	G	30
209.50	226.30	8.40	CO 00094	P	26
212.00	222.60	5.30	CO 7384	ISO	55
212.00	226.00	7.00	CO 7430	ISO	56
214.30	225.70	5.70	CO 03303	G	30
214.50	231.30	8.40	CO 00095	P	26
215.26	229.22	6.98	CO 0472	AS568	44
215.27	225.93	5.33	CO 6492	AS568	43
215.49	222.55	3.53	CO 1990	AS568	42
215.57	220.81	2.62	CO 7776	AS568	40
218.00	228.60	5.30	CO 7385	ISO	55
218.00	232.00	7.00	CO 7431	ISO	56
219.30	230.70	5.70	CO 00237	G	30
219.50	236.30	8.40	CO 00096	P	26
221.62	232.28	5.33	CO 7791	AS568	43
221.84	228.90	3.53	CO 2001	AS568	42
221.92	227.16	2.62	CO 8187	AS568	40
222.50	234.50	6.00	CO 00311	V	37
224.00	234.60	5.30	CO 7386	ISO	55
224.00	238.00	7.00	CO 7432	ISO	56
224.30	235.70	5.70	CO 02011	G	30
224.50	241.30	8.40	CO 00097	P	26
227.96	241.92	6.98	CO 0473	AS568	44
227.97	238.63	5.33	CO 7792	AS568	43
228.19	235.25	3.53	CO 2018	AS568	42
228.27	233.51	2.62	CO 8534	AS568	40
229.30	240.70	5.70	CO 00238	G	30
229.50	246.30	8.40	CO 00098	P	26
230.00	240.60	5.30	CO 7387	ISO	55
230.00	244.00	7.00	CO 7433	ISO	56
234.30	245.70	5.70	CO 02031	G	30
234.32	244.98	5.33	CO 7793	AS568	43
234.50	251.30	8.40	CO 00099	P	26
234.54	241.60	3.53	CO 2032	AS568	42
234.62	239.86	2.62	DO 1122	AS568	40
236.00	246.60	5.30	CO 7388	ISO	55
236.00	250.00	7.00	CO 7434	ISO	56
239.30	250.70	5.70	CO 00239	G	30
239.50	256.30	8.40	CO 00100	P	26
240.66	254.62	6.98	CO 0474	AS568	44
240.67	251.33	5.33	CO 8801	AS568	43

*In the table above, the following indications are used:
・Former JASO → JASO ・ISO equivalent → ISO

Inside diameter d0	Outside diameter D	Thickness W	Dimension code	Applicable standard	Page listed
240.89	247.95	3.53	CO 2050	AS568	42
240.97	246.21	2.62	DO 1123	AS568	40
243.00	253.60	5.30	CO 7389	ISO	55
243.00	257.00	7.00	CO 7435	ISO	56
244.30	255.70	5.70	CO 02060	G	30
244.50	261.30	8.40	CO 00101	P	26
247.02	257.68	5.33	CO 8803	AS568	43
247.24	254.30	3.53	CO 2064	AS568	42
247.32	252.56	2.62	DO 1124	AS568	40
249.30	260.70	5.70	CO 00240	G	30
249.50	266.30	8.40	CO 00102	P	26
250.00	260.60	5.30	CO 7390	ISO	55
250.00	264.00	7.00	CO 7436	ISO	56
253.36	267.32	6.98	CO 0475	AS568	44
253.37	264.03	5.33	CO 7794	AS568	43
253.59	260.65	3.53	CO 3415	AS568	42
254.30	265.70	5.70	CO 02079	G	30
254.50	271.30	8.40	CO 00103	P	26
258.00	268.60	5.30	CO 7391	ISO	56
258.00	272.00	7.00	CO 7437	ISO	56
259.30	270.70	5.70	CO 00241	G	30
259.50	276.30	8.40	CO 00104	P	26
264.30	275.70	5.70	CO 06543	G	32
264.50	281.30	8.40	CO 00105	P	26
265.00	275.60	5.30	CO 7392	ISO	56
265.00	279.00	7.00	CO 7438	ISO	56
266.06	280.02	6.98	CO 0476	AS568	44
266.07	276.73	5.33	CO 4905	AS568	43
266.29	273.35	3.53	CO 5748	AS568	42
269.30	280.70	5.70	CO 00242	G	32
269.50	286.30	8.40	CO 00106	P	26
272.00	284.00	6.00	CO 00312	V	37
272.00	282.60	5.30	CO 7393	ISO	56
272.00	286.00	7.00	CO 7439	ISO	56
274.30	285.70	5.70	CO 02100	G	32
274.50	291.30	8.40	CO 00107	P	26
278.76	292.72	6.98	CO 0477	AS568	44
278.77	289.43	5.33	CO 7795	AS568	43
278.99	286.05	3.53	CO 5393	AS568	42
279.30	290.70	5.70	CO 00243	G	32
279.50	296.30	8.40	CO 00108	P	26
280.00	290.60	5.30	CO 7394	ISO	56
280.00	294.00	7.00	CO 7440	ISO	56
284.30	295.70	5.70	CO 03210	G	32
284.50	301.30	8.40	CO 00109	P	26
289.30	300.70	5.70	CO 00244	G	32
289.50	306.30	8.40	CO 00110	P	26
290.00	300.60	5.30	CO 7395	ISO	56
290.00	304.00	7.00	CO 7441	ISO	56
291.46	305.42	6.98	CO 0478	AS568	44
291.47	302.13	5.33	CO 8851	AS568	44
291.69	298.75	3.53	CO 2132	AS568	42
294.30	305.70	5.70	CO 06566	G	32
294.50	311.30	8.40	CO 00111	P	26
299.30	310.70	5.70	CO 00245	G	32
299.50	316.30	8.40	CO 00112	P	26
300.00	310.60	5.30	CO 7396	ISO	56
300.00	314.00	7.00	CO 7442	ISO	56
304.16	318.12	6.98	CO 0479	AS568	44
304.17	314.83	5.33	CO 4906	AS568	44
304.30	315.70	5.70	DO 01137	G	32
304.39	311.45	3.53	CO 4602	AS568	42
304.50	321.30	8.40	CO 02147	P	26
307.00	317.60	5.30	CO 7397	ISO	56
307.00	321.00	7.00	CO 7443	ISO	56
309.30	320.70	5.70	CO 02158	G	32
309.50	326.30	8.40	CO 08835	P	26
314.50	331.30	8.40	CO 00113	P	26
315.00	325.60	5.30	CO 7398	ISO	56
315.00	329.00	7.00	CO 7444	ISO	56

Inside diameter d0	Outside diameter D	Thickness W	Dimension code	Applicable standard	Page listed
316.86	330.82	6.98	CO 0480	AS568	44
319.30	330.70	5.70	CO 02176	G	32
319.50	336.30	8.40	CO 00114	P	26
321.50	333.50	6.00	CO 00313	V	37
324.50	341.30	8.40	CO 08836	P	26
325.00	335.60	5.30	CO 7399	ISO	56
325.00	339.00	7.00	CO 7445	ISO	56
329.30	340.70	5.70	CO 08813	G	32
329.50	346.30	8.40	CO 07645	P	26
329.56	343.52	6.98	CO 0481	AS568	44
329.57	340.23	5.33	CO 7797	AS568	44
329.79	336.85	3.53	CO 2192	AS568	42
334.30	345.70	5.70	CO 08814	G	32
334.50	351.30	8.40	CO 00115	P	26
335.00	345.60	5.30	CO 7400	ISO	56
335.00	349.00	7.00	CO 7446	ISO	56
339.30	350.70	5.70	CO 02206	G	32
339.50	356.30	8.40	CO 00116	P	26
342.26	356.22	6.98	CO 0482	AS568	44
344.30	355.70	5.70	CO 02216	G	32
344.50	361.30	8.40	CO 08837	P	26
345.00	355.60	5.30	CO 7401	ISO	56
345.00	359.00	7.00	CO 7447	ISO	56
349.30	360.70	5.70	CO 02223	G	32
349.50	366.30	8.40	CO 06615	P	26
354.30	365.70	5.70	CO 08815	G	32
354.50	371.30	8.40	CO 00117	P	26
354.96	368.92	6.98	CO 0483	AS568	44
354.97	365.63	5.33	CO 7798	AS568	44
355.00	365.60	5.30	CO 7402	ISO	56
355.00	369.00	7.00	CO 7448	ISO	56
355.19	362.25	3.53	CO 4549	AS568	42
359.30	370.70	5.70	CO 02244	G	32
359.50	376.30	8.40	CO 00118	P	26
364.50	381.30	8.40	CO 06630	P	26
365.00	375.60	5.30	CO 7403	ISO	56
365.00	379.00	7.00	CO 7449	ISO	56
367.66	381.62	6.98	CO 0484	AS568	44
369.50	386.30	8.40	CO 08838	P	26
374.30	385.70	5.70	CO 08818	G	32
374.50	391.30	8.40	CO 00119	P	26
375.00	385.60	5.30	CO 7404	ISO	56
375.00	389.00	7.00	CO 7450	ISO	56
376.00	388.00	6.00	CO 00314	V	37
379.30	390.70	5.70	CO 02272	G	32
379.50	396.30	8.40	CO 02274	P	26
380.36	394.32	6.98	CO 0485	AS568	44
380.37	391.03	5.33	CO 6643	AS568	44
380.59	387.65	3.53	CO 2277	AS568	42
384.30	395.70	5.70	CO 08819	G	32
384.50	401.30	8.40	CO 00120	P	26
387.00	397.60	5.30	CO 7405	ISO	56
387.00	401.00	7.00	CO 7451	ISO	56
389.30	400.70	5.70	CO 02287	G	32
389.50	406.30	8.40	CO 06650	P	26
393.06	407.02	6.98	CO 0486	AS568	44
394.30	405.70	5.70	CO 08820	G	32
394.50	411.30	8.40	CO 08839	P	26
399.30	410.70	5.70	CO 02301	G	32
399.50	416.30	8.40	CO 00121	P	26
400.00	410.60	5.30	CO 7406	ISO	56
400.00	414.00	7.00	CO 7452	ISO	56
404.30	415.70	5.70	CO 08821	G	32
404.50	421.30	8.40	CO 02311	P	26
405.26	412.32	3.53	CO 4609	AS568	42
405.26	415.92	5.33	CO 7799	AS568	44
405.26	419.22	6.98	CO 4397	AS568	44
409.30	420.70	5.70	CO 08822	G	32
409.50	426.30	8.40	CO 06663	P	26
412.00	426.00	7.00	CO 7453	ISO	56

*In the table above, the following indications are used:
・Former JASO → JASO ・ISO equivalent → ISO

Even for O-rings for the dimensions given in this table, it may be necessary to prepare new tooling depending on the material used. For more details, please refer to the page on which the O-ring is listed.

Inside diameter d0	Outside diameter D	Thickness W	Dimension code	Applicable standard	Page listed
414.30	425.70	5.70	CO 02336	G	32
414.50	431.30	8.40	CO 02337	P	26
417.96	431.92	6.98	CO 7806	AS568	44
419.30	430.70	5.70	CO 08823	G	32
419.50	436.30	8.40	CO 08840	P	26
424.30	435.70	5.70	CO 02358	G	32
424.50	441.30	8.40	CO 02359	P	26
425.00	439.00	7.00	CO 7454	ISO	56
425.50	437.50	6.00	CO 00315	V	37
429.30	440.70	5.70	CO 08824	G	32
429.50	446.30	8.40	CO 02371	P	26
430.66	437.72	3.53	CO 6675	AS568	42
430.66	441.32	5.33	CO 8802	AS568	44
430.66	444.62	6.98	CO 7807	AS568	45
434.30	445.70	5.70	CO 08825	G	32
434.50	451.30	8.40	CO 02383	P	28
437.00	451.00	7.00	CO 7455	ISO	56
439.30	450.70	5.70	CO 08826	G	32
439.50	456.30	8.40	CO 08841	P	28
443.36	457.32	6.98	CO 2401	AS568	45
444.30	455.70	5.70	CO 08827	G	32
444.50	461.30	8.40	CO 06681	P	28
449.30	460.70	5.70	CO 02417	G	32
449.50	466.30	8.40	CO 08842	P	28
450.00	464.00	7.00	CO 7456	ISO	56
454.30	465.70	5.70	CO 08828	G	32
454.50	471.30	8.40	CO 02433	P	28
456.06	463.12	3.53	CO 5011	AS568	42
456.06	466.72	5.33	CO 7826	AS568	44
456.06	470.02	6.98	CO 7808	AS568	45
459.30	470.70	5.70	CO 02441	G	32
459.50	476.30	8.40	CO 08843	P	28
462.00	476.00	7.00	CO 6711	ISO	56
464.30	475.70	5.70	CO 06715	G	32
464.50	481.30	8.40	CO 02453	P	28
468.76	482.72	6.98	CO 5107	AS568	45
469.30	480.70	5.70	CO 02460	G	32
469.50	486.30	8.40	CO 08844	P	28
474.30	485.70	5.70	CO 08829	G	32
474.50	491.30	8.40	CO 08845	P	28
475.00	495.00	10.00	CO 00316	V	37
475.00	489.00	7.00	CO 7457	ISO	56
479.30	490.70	5.70	CO 08830	G	32
479.50	496.30	8.40	CO 06734	P	28
481.46	492.12	5.33	CO 7800	AS568	44
481.46	495.42	6.98	CO 4270	AS568	45
484.30	495.70	5.70	CO 08831	G	32
484.50	501.30	8.40	CO 09165	P	28
487.00	501.00	7.00	CO 7458	ISO	56
489.30	500.70	5.70	CO 08832	G	32
489.50	506.30	8.40	DO 09015	P	28
494.16	508.12	6.98	CO 8810	AS568	45
494.30	505.70	5.70	CO 08833	G	32
494.50	511.30	8.40	DO 09016	P	28
499.30	510.70	5.70	CO 08834	G	32
499.50	516.30	8.40	CO 09057	P	28
500.00	514.00	7.00	CO 7459	ISO	56
515.00	529.00	7.00	CO 7460	ISO	56
524.50	544.50	10.00	CO 00317	V	37
530.00	544.00	7.00	CO 7461	ISO	56
545.00	559.00	7.00	CO 7462	ISO	56
560.00	574.00	7.00	CO 7463	ISO	56
579.00	599.00	10.00	CO 00318	V	37
580.00	594.00	7.00	CO 7464	ISO	56
600.00	614.00	7.00	CO 7465	ISO	56
615.00	629.00	7.00	CO 7466	ISO	56
630.00	644.00	7.00	CO 7467	ISO	56
633.50	653.50	10.00	CO 00319	V	37
650.00	664.00	7.00	CO 7468	ISO	56
670.00	684.00	7.00	CO 7469	ISO	56

Inside diameter d0	Outside diameter D	Thickness W	Dimension code	Applicable standard	Page listed
683.00	703.00	10.00	CO 00320	V	37
732.50	752.50	10.00	CO 00321	V	37
782.00	802.00	10.00	CO 00322	V	37
836.50	856.50	10.00	CO 00323	V	37
940.50	960.50	10.00	CO 00324	V	37
1044.00	1064.00	10.00	CO 00325	V	37

*In the table above, the following indications are used:
・Former JASO → JASO ・ISO equivalent → ISO

NOK Product Lineup

Sealing products



Oil seals

- Oil seals
- Packings
- O-rings
- Metal gaskets “SOFTMETAL”
- Seal washers
- Mechanical seals
- Lip seals
- Segment seals
- Brush seals
- Static metal packings actiseals
- Perfluoroelastomer “KALREZ”
- Magnetic fluid seals

Industrial rubber & resin products



Polyurethane rubber “IRON RUBBER” products

- Industrial rubber products
- Iron rubber products
- Iron rubber belts
- Traffic signs & Safety devices
- Engineering plastic products
- Synthetic rubber “NOXTITE”
- Industrial chemical products “CHEMINOX”
- Phenolic molding material

Vibration damping products Sound isolator products



Anti-vibration rubber

- Vibration damping products
- Sound isolator products

Fluid power equipment



Accumulators

- Accumulators
- Housing and related equipments


Plant equipment



Metal bellows (Welding bellows)

- Metal bellows
- Couplings

Electronics products

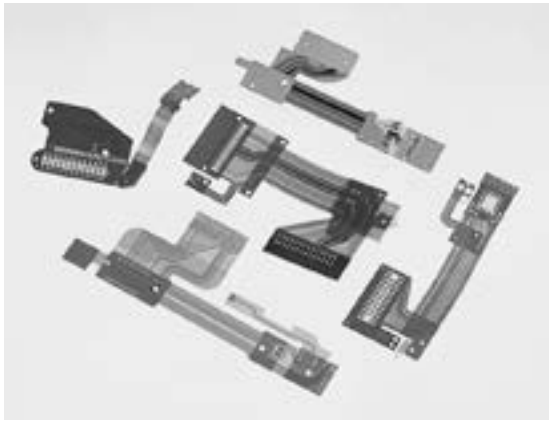

Flexible circuits

- Flexible printed circuit
- Precision rubber / resin parts


Industrial function parts & special parts



Special lubricant

- Polymer hollow fiber membrane modules
- Solenoids
- Actuators
- Special lubricant
- Fluorine base coating material “GLEITPAN”
- Fluorine base water repellent & oil repellent agents “NOXBARRIER”
- Compressor valves
- Recoil starters

OA equipment products

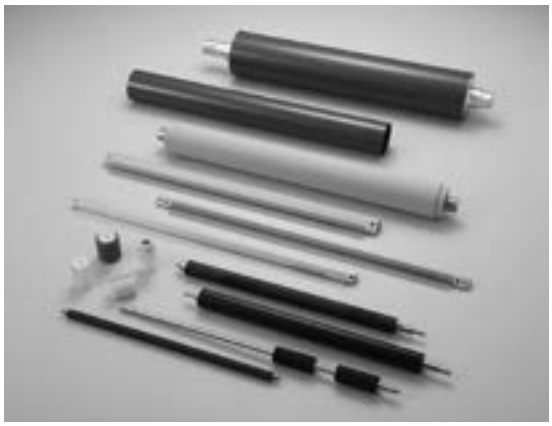

OA equipment products

- OA equipment products

Shaft Tolerances and Dimensions (JIS B 0401)

Unit: 0.001mm

Classification of nominal dimension (mm)	IT 5	m 5	k 5	j 5	h 5	IT 6	r 6	p 6	n 6	m 6	k 6	j 6	h 6	g 6	f 6	IT 7	s 7	r 7	p 7	n 7	m 7	k 7	j 7	h 7	g 7	f 7	e 7	IT 8	h 8	f 8	e 8	d 8	IT 9	h 9	e 9	d 9	c 9	b 9	IT 10	h 10	IT 11	h 11
		Upper tolerance / Lower tolerance					Upper tolerance / Lower tolerance										Upper tolerance / Lower tolerance												Upper tolerance / Lower tolerance					Upper tolerance / Lower tolerance						Upper tolerance / Lower tolerance		Upper tolerance / Lower tolerance
1 - 3	4	+6 / +2	+4 / 0	+4 / −1	0 / −4	6	+16 / +10	+12 / +6	+10 / +4	+8 / +2	+6 / 0	+6 / −1	0 / −6	−2 / −8	−6 / −12	10	+24 / +15	+21 / +12	+18 / +9	+15 / +6	— / —	— / —	+7 / −2	0 / −10	−3 / −12	−6 / −16	−14 / −24	14	0 / −14	−6 / −20	−14 / −28	−20 / −34	25	0 / −25	−14 / −39	−20 / −45	−60 / −85	−140 / −165	40	0 / −40	60	0 / −60
3 - 6	5	+9 / +4	+6 / +1	+4 / −1	0 / −5	8	+23 / +15	+20 / +12	+16 / +8	+12 / +4	+9 / +1	+7 / −1	0 / −8	−4 / −12	−10 / −18	12	+31 / +19	+27 / +15	+24 / +12	+20 / +8	— / —	— / —	+9 / −3	0 / −12	−4 / −16	−10 / −22	−20 / −32	18	0 / −18	−10 / −28	−20 / −38	−30 / −48	30	0 / −30	−20 / −50	−30 / −60	−70 / −100	−140 / −170	48	0 / −48	75	0 / −75
6 - 10	6	+12 / +6	+7 / +1	+4 / −2	0 / −6	9	+28 / +19	+24 / +15	+19 / +10	+15 / +6	+10 / +1	+7 / −2	0 / −9	−5 / −14	−13 / −22	15	+38 / +23	+34 / +19	+30 / +15	+25 / +10	+21 / +6	+16 / +1	+10 / −5	0 / −15	−5 / −20	−13 / −28	−25 / −40	22	0 / −22	−13 / −35	−25 / −47	−40 / −62	36	0 / −36	−25 / −61	−40 / −76	−80 / −116	−150 / −186	58	0 / −58	90	0 / −90
10 - 14 14 - 18	8	+15 / +7	+9 / +1	+5 / −3	0 / −8	11	+34 / +23	+29 / +18	+23 / +12	+18 / +7	+12 / +1	+8 / −3	0 / −11	−6 / −17	−16 / −27	18	+46 / +28	+41 / +23	+36 / +18	+30 / +12	+25 / +7	+19 / +1	+12 / −6	0 / −18	−6 / −24	−16 / −34	−32 / −50	27	0 / −27	−16 / −43	−32 / −59	−50 / −77	43	0 / −43	−32 / −75	−50 / −93	−95 / −138	−150 / −193	70	0 / −70	110	0 / −110
18 - 24 24 - 30	9	+17 / +8	+11 / +2	+5 / −4	0 / −9	13	+41 / +28	+35 / +22	+28 / +15	+21 / +8	+15 / +2	+9 / −4	0 / −13	−7 / −20	−20 / −33	21	+56 / +35	+49 / +28	+43 / +22	+36 / +15	+29 / +8	+23 / +2	+13 / −8	0 / −21	−7 / −28	−20 / −41	−40 / −61	33	0 / −33	−20 / −53	−40 / −73	−65 / −98	52	0 / −52	−40 / −92	−65 / −117	−110 / −162	−160 / −212	84	0 / −84	130	0 / −130
30 - 40 40 - 50	11	+20 / +9	+13 / +2	+6 / −5	0 / −11	16	+50 / +34	+42 / +26	+33 / +17	+25 / +9	+18 / +2	+11 / −5	0 / −16	−9 / −25	−25 / −41	25	+68 / +43	+59 / +34	+51 / +26	+42 / +17	+34 / +9	+27 / +2	+15 / −10	0 / −25	−9 / −34	−25 / −50	−50 / −75	39	0 / −39	−25 / −64	−50 / −89	−80 / −119	62	0 / −62	−50 / −112	−80 / −142	−120 / −182 / −130 / −192	−170 / −232 / −180 / −242	100	0 / −100	160	0 / −160
50 - 65 65 - 80	13	+24 / +11	+15 / +2	+6 / −7	0 / −13	19	+60 / +41 / +62 / +43	+51	+39 / +20	+30 / +11	+21 / +2	+12 / −7	0 / −19	−10 / −29	−30 / −49	30	+83 / +53 / +89 / +59	+71 / +41 / +73 / +43	+62 / +32	+50 / +20	+41 / +11	+32 / +2	+18 / −12	0 / −30	−10 / −40	−30 / −60	−60 / −90	46	0 / −46	−30 / −76	−60 / −106	−100 / −146	74	0 / −74	−60 / −134	−100 / −174	−140 / −214 / −150 / −224	−190 / −264 / −200 / −274	120	0 / −120	190	0 / −190
80 - 100 100 - 120	15	+28 / +13	+18 / +3	+6 / −9	0 / −15	22	+73 / +51 / +76 / +54	+59	+45 / +23	+35 / +13	+25 / +3	+13 / −9	0 / −22	−12 / −34	−36 / −58	35	+106 / +71 / +114 / +79	+86 / +51 / +89 / +54	+72 / +37	+58 / +23	+48 / +13	+38 / +3	+20 / −15	0 / −35	−12 / −47	−36 / −71	−72 / −107	54	0 / −54	−36 / −90	−72 / −126	−120 / −174	87	0 / −87	−72 / −159	−120 / −207	−170 / −257 / −180 / −267	−220 / −307 / −240 / −327	140	0 / −140	220	0 / −220
120 - 140 140 - 160 160 - 180	18	+33 / +15	+21 / +3	+7 / −11	0 / −18	25	+88 / +63 / +90 / +65 / +93 / +68	+68	+52 / +27	+40 / +15	+28 / +3	+14 / −11	0 / −25	−14 / −39	−43 / −68	40	+132 / +92 / +140 / +100 / +148 / +108	+103 / +63 / +105 / +65 / +108 / +68	+83 / +43	+67 / +27	+55 / +15	+43 / +3	+22 / −18	0 / −40	−14 / −54	−43 / −83	−85 / −125	63	0 / −63	−43 / −106	−85 / −148	−145 / −208	100	0 / −100	−85 / −185	−145 / −245	−200 / −300 / −210 / −310 / −230 / −330	−260 / −360 / −280 / −380 / −310 / −410	160	0 / −160	250	0 / −250
180 - 200 200 - 225 225 - 250	20	+37 / +17	+24 / +4	+7 / −13	0 / −20	29	+106 / +77 / +109 / +80 / +113 / +84	+79	+60 / +31	+46 / +17	+33 / +4	+16 / −13	0 / −29	−15 / −44	−50 / −79	46	+168 / +122 / +176 / +130 / +188 / +140	+123 / +77 / +126 / +80 / +130 / +84	+96 / +50	+77 / +31	+63 / +17	+50 / +4	+25 / −21	0 / −46	−15 / −61	−50 / −96	−100 / −146	72	0 / −72	−50 / −122	−100 / −172	−170 / −242	115	0 / −115	−100 / −215	−170 / −285	−240 / −355 / −260 / −375 / −280 / −395	−340 / −455 / −380 / −495 / −420 / −535	185	0 / −185	290	0 / −290
250 - 280 280 - 315	23	+43 / +20	+27 / +4	+7 / −16	0 / −23	32	+126 / +94 / +130 / +98	+88	+66 / +34	+52 / +20	+36 / +4	+16 / −16	0 / −32	−17 / −49	−56 / −88	52	+210 / +158 / +222 / +170	+146 / +94 / +150 / +98	+108 / +56	+86 / +34	+72 / +20	+56 / +4	+26 / −26	0 / −52	−17 / −69	−56 / −108	−110 / −162	81	0 / −81	−56 / −137	−110 / −191	−190 / −271	130	0 / −130	−110 / −240	−190 / −320	−300 / −430 / −330 / −460	−480 / −610 / −540 / −670	210	0 / −210	320	0 / −320
315 - 355 355 - 400	25	+46 / +21	+29 / +4	+7 / −18	0 / −25	36	+144 / +108 / +150 / +114	+98	+73 / +37	+57 / +21	+40 / +4	+18 / −18	0 / −36	−18 / −54	−62 / −98	57	+247 / +190 / +265 / +208	+165 / +108 / +171 / +114	+119 / +62	+94 / +37	+78 / +21	+61 / +4	+29 / −28	0 / −57	−18 / −75	−62 / −119	−125 / −182	89	0 / −89	−62 / −151	−125 / −214	−210 / −299	140	0 / −140	−125 / −265	−210 / −350	−360 / −500 / −400 / −540	−600 / −740 / −680 / −820	230	0 / −230	360	0 / −360
400 - 450 450 - 500	27	+50 / +23	+32 / +5	+7 / −20	0 / −27	40	+166 / +126 / +172 / +132	+108	+80 / +40	+63 / +23	+45 / +4	+20 / −20	0 / −40	−20 / −60	−68 / −108	63	+295 / +232 / +315 / +252	+189 / +126 / +195 / +132	+131 / +68	+103 / +40	+86 / +23	+68 / +5	+31 / −32	0 / −63	−20 / −83	−68 / −131	−135 / −198	97	0 / −97	−68 / −165	−135 / −232	−230 / −327	155	0 / −155	−135 / −290	−230 / −385	−440 / −595 / −480 / −635	−760 / −915 / −840 / −995	250	0 / −250	400	0 / −400

Unit: 0.001mm

Hole Tolerances and Dimensions (JIS B 0401)

Unit: 0.001mm

Classification of nominal dimension (mm)	IT 6	M6	K6	J6	H6	G6	F6	IT 7	U7	T7	S7	R7	P7	N7	M7	K7	J7	H7	G7	F7	E7	IT 8	H8	F8	E8	D8	IT 9	H9	E9	D9	C9	IT 10	H10	D10	C10	B10	IT 12	H12
		Upper tolerance / Lower tolerance							Upper tolerance / Lower tolerance														Upper tolerance / Lower tolerance					Upper tolerance / Lower tolerance					Upper tolerance / Lower tolerance				Upper tolerance / Lower tolerance
1 - 3	6	−2 / −8	+0 / −6	+2 / −4	+6 / 0	+8 / +2	+12 / +6	10	−18 / −28	— / —	−14 / −24	−10 / −20	−6 / −16	−4 / −14	−2 / −12	0 / −10	+3 / −6	+10 / 0	+12 / +2	+16 / +6	+24 / +14	14	+14 / 0	+20 / +6	+28 / +14	+34 / +20	25	+25 / 0	+39 / +14	+45 / +20	+85 / +60	40	+40 / 0	+60 / +20	+100 / +60	+180 / +140	100	+100 / 0
3 - 6	8	−1 / −9	+2 / −6	+4 / −4	+8 / 0	+12 / +4	+18 / +10	12	−19 / −31	— / —	−15 / −27	−11 / −23	−8 / −20	−4 / −16	0 / −12	+3 / −9	+5 / −7	+12 / 0	+16 / +4	+22 / +10	+32 / +20	18	+18 / 0	+28 / +10	+38 / +20	+48 / +30	30	+30 / 0	+50 / +20	+60 / +30	+100 / +70	48	+48 / 0	+78 / +30	+118 / +70	+188 / +140	120	+120 / 0
6 - 10	9	−3 / −12	+2 / −7	+5 / −4	+9 / 0	+14 / +5	+22 / +13	15	−22 / −37	— / —	−17 / −32	−13 / −28	−9 / −24	−4 / −19	0 / −15	+5 / −10	+8 / −7	+15 / 0	+20 / +5	+28 / +13	+40 / +25	22	+22 / 0	+35 / +13	+47 / +25	+62 / +40	36	+36 / 0	+61 / +25	+76 / +40	+116 / +80	58	+58 / 0	+98 / +40	+138 / +80	+208 / +150	150	+150 / 0
10 - 14 14 - 18	11	−4 / −15	+2 / −9	+6 / −5	+11 / 0	+17 / +6	+27 / +16	18	−26 / −44	— / —	−21 / −39	−16 / −34	−11 / −29	−5 / −23	0 / −18	+6 / −12	+10 / −8	+18 / 0	+24 / +6	+34 / +16	+50 / +32	27	+27 / 0	+43 / +16	+59 / +32	+77 / +50	43	+43 / 0	+75 / +32	+93 / +50	+138 / +95	70	+70 / 0	+120 / +50	+165 / +95	+220 / +150	180	+180 / 0
18 - 24	13	−4 / −17	+2 / −11	+8 / −5	+13 / 0	+20 / +7	+33 / +20	21	−33 / −54	— / —	−27 / −40 / −61	−20 / −33 / −54	−14 / −35 / −48	−7 / −28 / −41	0 / −21 / −35	+6 / −15 / −28	+12 / −9 / −21	+21 / 0 / −15	+28 / +7 / −7	+41 / +20 / +7	+61 / +40 / +20	33	+33 / 0	+53 / +20	+73 / +40	+98 / +65	52	+52 / 0	+92 / +40	+117 / +65	+162 / +110	84	+84 / 0	+149 / +65	+194 / +110	+244 / +160	210	+210 / 0
24 - 30																																							
30 - 40	16	−4 / −20	+3 / −13	+10 / −6	+16 / 0	+25 / +9	+41 / +25	25	−51 / −76 / −61 / −86	−39 / −64 / −45 / −70	−34 / −59	−25 / −50	−17 / −42	−8 / −33	0 / −25	+7 / −18	+14 / −11	+25 / 0	+34 / +9	+50 / +25	+75 / +50	39	+39 / 0	+64 / +25	+89 / +50	+119 / +80	62	+62 / 0	+112 / +50	+142 / +80	+182 / +120 / +192 / +130	100	+100 / 0	+180 / +80	+220 / +120 / +230 / +130	+270 / +170 / +280 / +180	250	+250 / 0
40 - 50																																							
50 - 65	19	−5 / −24	+4 / −15	+13 / −6	+19 / 0	+29 / +10	+49 / +30	30	−76 / −106 / −91 / −121	−55 / −85 / −64 / −94	−42 / −72 / −48 / −78	−30 / −60 / −32 / −62	−21 / −51	−9 / −39	0 / −30	+9 / −21	+18 / −12	+30 / 0	+40 / +10	+60 / +30	+90 / +60	46	+46 / 0	+76 / +30	+106 / +60	+146 / +100	74	+74 / 0	+134 / +60	+174 / +100	+214 / +140 / +224 / +150	120	+120 / 0	+220 / +146	+260 / +140 / +270 / +150	+310 / +190 / +320 / +200	300	+300 / 0
65 - 80																																							
80 - 100	22	−6 / −28	+4 / −18	+16 / −6	+22 / 0	+34 / +12	+58 / +36	35	−111 / −146 / −131 / −166	−78 / −113 / −91 / −126	−58 / −93 / −66 / −101	−38 / −73 / −41 / −76	−24 / −59	−10 / −45	0 / −35	+10 / −25	+22 / −13	+35 / 0	+47 / +12	+71 / +36	+107 / +72	54	+54 / 0	+90 / +36	+126 / +72	+174 / +120	87	+87 / 0	+159 / +72	+207 / +120	+257 / +170 / +267 / +180	140	+140 / 0	+260 / +120	+310 / +170 / +320 / +180	+360 / +220 / +380 / +240	350	+350 / 0
100 - 120																																							
120 - 140	25	−8 / −33	+4 / −21	+16 / −7	+25 / 0	+39 / +14	+68 / +43	40	— / —	−107 / −147	−77 / −117	−48 / −88										63	+63 / 0	+106 / +43	+148 / +85	+208 / +145	100	+100 / 0	+185 / +85	+245 / +145	+300 / +200	160	+160 / 0	+305 / +145	+360 / +200 / +370 / +210	+420 / +260 / +440 / +280	400	+400 / 0
140 - 160									— / —	−119 / −159	−85 / −125	−50 / −90	−28 / −68	−12 / −52	0 / −40	+12 / −28	+26 / −14	+40 / 0	+54 / +14	+83 / +43	+125 / +85									+310 / +210							
160 - 180									— / —	−131 / −171	−93 / −133	−53 / −93																		+330 / +230				+390 / +230	+470 / +310		
180 - 200	29	−8 / −37	+5 / −24	+22 / −7	+29 / 0	+44 / +15	+79 / +50	46	— / —	— / —	−105 / −151	−60 / −106										72	+72 / 0	+122 / +50	+172 / +100	+242 / +170	115	+115 / 0	+215 / +100	+285 / +170	+355 / +240	185	+185 / 0	+355 / +170	+425 / +240 / +445 / +260	+525 / +340 / +565 / +380	460	+460 / 0
200 - 225									— / —	— / —	−113 / −159	−63 / −109	−33 / −79	−14 / −60	0 / −46	+13 / −33	+30 / −16	+46 / 0	+61 / +15	+96 / +50	+146 / +100									+375 / +260							
225 - 250									— / —	— / —	−123 / −169	−67 / −113																		+395 / +280				+465 / +280	+605 / +420		
250 - 280	32	−9 / −41	+5 / −27	+25 / −7	+32 / 0	+49 / +17	+88 / +56	52	— / —	— / —	— / —	−74 / −126	−36 / −88	−14 / −66	0 / −52	+16 / −36	+36 / −16	+52 / 0	+69 / +17	+108 / +56	+162 / +110	81	+81 / 0	+137 / +56	+191 / +110	+271 / +190	130	+130 / 0	+240 / +110	+320 / +190	+430 / +300 / +460 / +330	210	+210 / 0	+400 / +190	+510 / +300 / +540 / +330	+690 / +480 / +750 / +540	520	+520 / 0
280 - 315									— / —	— / —	— / —	−78 / −130																											
315 - 355	36	−10 / −46	+7 / −29	+29 / −7	+36 / 0	+54 / +18	+98 / +62	57	— / —	— / —	— / —	−87 / −144	−41 / −98	−16 / −73	0 / −57	+17 / −40	+39 / −18	+57 / 0	+75 / +18	+119 / +62	+182 / +125	89	+89 / 0	+151 / +62	+214 / +125	+299 / +210	140	+140 / 0	+265 / +125	+350 / +210	+500 / +360 / +540 / +400	230	+230 / 0	+440 / +210	+590 / +360 / +630 / +400	+830 / +600 / +910 / +680	570	+570 / 0
355 - 400									— / —	— / —	— / —	−93 / −150																											
400 - 450	40	−10 / −50	+8 / −32	+33 / −7	+40 / 0	+60 / +20	+108 / +68	63	— / —	— / —	— / —	−103 / −166	−45 / −108	−17 / −80	0 / −63	+18 / −45	+43 / −20	+63 / 0	+83 / +20	+131 / +68	+198 / +135	97	+97 / 0	+165 / +68	+232 / +135	+327 / +230	155	+155 / 0	+290 / +135	+385 / +230	+595 / +440 / +635 / +480	250	+250 / 0	+480 / +230	+690 / +440 / +730 / +480	+1010 / +760 / +1090 / +840	630	+630 / 0
450 - 500									— / —	— / —	— / —	−109 / −172																											

Unit: 0.001mm

Appendix

Major SI Unit Conversion Tables

Units shown within the bold lines indicate SI units.

Force	N	dyn	kgf
	1	1×10^{5}	$1.019\,72 \times 10^{-1}$
	1×10^{-5}	1	$1.019\,72 \times 10^{-6}$
	9.806 65	9.80665×10^{5}	1

Viscosity	Pa·s	cp	P
	1	1×10^{3}	1×10
	1×10^{-3}	1	1×10^{-2}
	1×10^{-1}	1×10^{2}	1

Note : 1P = 1dyn·s/cm^2 = 1g/cm·s, 1Pa·s = 1N·s/m^2, 1cP = 1mPa·s

Pressure	Pa	kPa	MPa	bar	kgf/cm^2	atm	mmH$_2$O	mmHg or Torr
	1	1×10^{-3}	1×10^{-6}	1×10^{-5}	$1.019\,72 \times 10^{-5}$	$9.869\,23 \times 10^{-6}$	$1.019\,72 \times 10^{-1}$	$7.500\,62 \times 10^{3}$
	1×10^{3}	1	1×10^{-3}	1×10^{-2}	$1.019\,72 \times 10^{-2}$	$9.869\,23 \times 10^{-3}$	$1.019\,72 \times 10^{2}$	7.500 62
	1×10^{6}	1×10^{3}	1	1×10	$1.019\,72 \times 10$	9.869 23	$1.019\,72 \times 10^{5}$	$7.500\,62 \times 10^{3}$
	1×10^{5}	1×10^{2}	1×10^{-1}	1	1.019 72	$9.869\,23 \times 10^{-1}$	$1.019\,72 \times 10^{4}$	$7.500\,62 \times 10^{2}$
	$9.806\,65 \times 10^{4}$	$9.806\,65 \times 10$	$9.806\,65 \times 10^{-2}$	$9.806\,65 \times 10^{-1}$	1	$9.678\,41 \times 10^{-1}$	1×10^{4}	$7.355\,59 \times 10^{2}$
	$1.013\,25 \times 10^{5}$	$1.013\,25 \times 10^{2}$	$1.013\,25 \times 10^{-1}$	1.013 25	1.033 23	1	$1.033\,23 \times 10^{4}$	$7.600\,00 \times 10^{2}$
	9.806 65	$9.806\,65 \times 10^{-3}$	$9.806\,65 \times 10^{-6}$	$9.806\,65 \times 10^{-5}$	1×10^{-4}	$9.678\,41 \times 10^{-5}$	1	$7.355\,59 \times 10^{-2}$
	$1.333\,22 \times 10^{2}$	$1.333\,22 \times 10^{-1}$	$1.333\,22 \times 10^{-4}$	$1.333\,22 \times 10^{-3}$	$1.359\,51 \times 10^{-3}$	$1.315\,79 \times 10^{-3}$	$1.359\,51 \times 10$	1

Note : 1Pa = 1N/m^2

Stress	Pa or N/m^2	MPa or N/mm^2	kgf	kgf/cm^2
	1	1×10^{-6}	$1.019\,72 \times 10^{-7}$	$1.019\,72 \times 10^{-5}$
	1×10^{6}	1	$1.019\,72 \times 10^{-1}$	$1.019\,72 \times 10$
	$9.806\,65 \times 10^{6}$	9.806 65	1	1×10^{2}
	$9.806\,65 \times 10^{4}$	$9.806\,65 \times 10^{-2}$	1×10^{-2}	1

Note : 1Pa = 1N/m^2, 1MPa = 1N/mm^2

Dynamic viscosity	m^2/s	cSt	St
	1	1×10^{6}	1×10^{4}
	1×10^{-6}	1	1×10^{2}
	1×10^{-4}	1×10^{2}	1

Note : 1St = 1cm^2/s, 1cSt = 1mm^2/S

Amount of work, energy, heat	J	kW·h	kgf·m	kcal
	1	2.7778×10^{-7}	1.0197×10^{-1}	2.3889×10^{-4}
	3.6×10^{6}	1	3.6710×10^{5}	8.6000×10^{2}
	9.8067	2.7241×10^{-6}	1	2.3427×10^{-3}
	4.1861×10^{3}	1.1628×10^{-3}	4.2686×10^{2}	1

Work rate (efficiency/power) and heat transfer	W	kgf·m/s	PS	kcal/h
	1	1.0197×10^{-1}	1.3596×10^{-3}	8.6000×10^{-1}
	9.8067	1	1.3333×10^{-2}	8.4337
	7.355×10^{2}	7.5×10	1	6.3253×10^{2}
	1.1628	1.1857×10^{-1}	1.5810×10^{-3}	1

©NOK CORPORATION Printed in Japan

Overseas Sales & Marketing Department Sales & Marketing Division
1-12-15 Shiba Daimon Minato-ku, Tokyo, Japan. Zipcord 105-8585.

The contents is subject to change without notice.

All compatibility data, application information, design & material information and technical deta in this catalogue are compiled as a reference material to make a basic packing selection.
A selected standard design from this catalogue may not comform to the actual use of an application, clue to unknown factors in the application.
Please comfirm the actual compatibility of a selected product with your application before using it.

محرک چرخش

تأمین‌کننده تخصصی بلبرینگ و رولبرینگ

BEARINGS · SEALS · BELTS · POWER TRANSMISSION

بلبرینگ | رولبرینگ | کاسه نمد | تسمه | اورینگ | یاتاقان | پکینگ | گریس

وب‌سایت	moharekcharkhesh.com
تلفن	021 3399 8121 · 021 3399 8100
همراه	0912 464 6470
ایمیل	MoharekCharkhesh@proton.me
آدرس	تهران، خیابان امیرکبیر، کوچه ناظم‌الاطبا شمالی، پاساژ تهران، طبقه سوم، پلاک ۱۴۲
ساعت کاری	شنبه تا پنج‌شنبه، ۹:۰۰ تا ۱۸:۰۰

SCAN TO VISIT

تماس با کارشناس فروش

مشاهده محصولات در سایت

برای استعلام قیمت، اعلام موجودی و ثبت سفارش تکی و عمده اورینگ NOK با کارشناسان محرک چرخش تماس بگیرید.

© Moharek Charkhesh — NOK catalogue, distributed for reference

تمامی حقوق کاتالوگ متعلق به سازنده NOK است