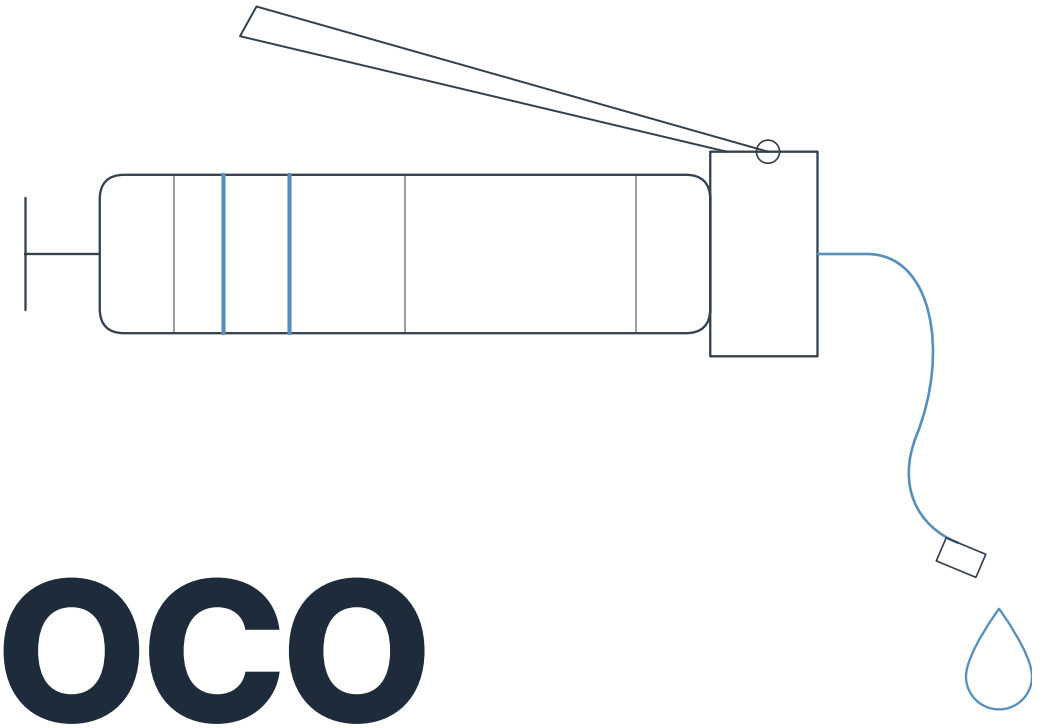


SUNOCO

Prestige Extreme Greases

مشخصات فنی گریس Sunoco Prestige

استعلام قیمت و خرید گریس SUNOCO ←

BRAND برند	ORIGIN کشور سازنده	PRODUCTS محصولات	PAGES تعداد صفحات	LANGUAGE زبان
SUNOCO	USA	Greases	1	English

moharekcharkhesh.com
MoharekCharkhesh@proton.me

تأمین‌کننده تخصصی بلبرینگ و رولبرینگ
تهران، خیابان امیرکبیر، کوچه ناظم‌الاطبا شمالی، پاساژ تهران، طبقه سوم، پلاک ۱۴۲

021 3399 8121
021 3399 8100
0912 464 6470

Sunoco Prestige Extreme Greases: EP-1 and EP-2

Product Overview

- Approved NLGI GC-LB
- NLGI Grades 1 and 2
- High Performance multipurpose extreme pressure grease
- Lithium Complex Thickener
- Dyed Red – Very Adhesive

Features and Benefits

- Provides water resistance and corrosion prevention, ensuring reliable lubrication even under heavy loads and extreme operating conditions
- Superior load carrying capability
- High-strength fluid film
- Superior storage life
- Outstanding Low Temperature pumpability

Applications

- On-Highway transportation grease for most chassis and wheel bearing applications
- Off-Highway grease applications including construction, forestry, and agriculture. For heavy duty mining applications consider Sunoco Presitge Ultra EP grease.
- Industrial applications requiring a high temperature lithium complex grease.
- Automobile wheel bearing and general chassis lubrication

PERFORMANCE DESCRIPTION	TEST METHOD	CONDITION	TYPICAL VALUES	
			EP-1 PRODUCT CODE: 72213	EP-2 PRODUCT CODE: 94013
Temperature Range			-30°C to 204°C (-22°F to 400°F)	-30°C to 204°C (-22°F to 400°F)
Appearance		Visual	Red & Adhesive	Red & Adhesive
Base Oil			Mineral	Mineral
Base Oil Viscosity	ASTM D-445	40°C	120 cSt	220 cSt
Thickener			Lithium Complex	Lithium Complex
Dropping Point	ASTM D-2265	°C	> 250	> 260
NLGI Grade			1	2
Worked Penetration (x60)	ASTM D-217	25°C (77°F)	310-340	265-295
Copper Corrosion	ASTM D-4048	24 hrs @ 100°C (212°F)	1B	1B
Rust Prevention	ASTM D-1743	48 hrs @ 52°C (125°F)	Pass	Pass
Wear Prevention (4-Ball Method)	ASTM D-2266	1200 rpm, 40 kg, 1 hr, 52100 steel	<0.6	<0.6
Extreme Pressure Properties (4-Ball Method)	ASTM D-2596	Weld Load, min	500kgf	500kgf

Values given represent typical properties only and are not intended for use in preparing specifications.

The Sunoco brand is built on a foundation of tradition, innovation, and uncompromising quality. Since our beginnings in Pittsburgh more than a century ago, Sunoco Engine Oils have grown into a trusted global presence thanks to our unsurpassed performance and reliability.

Over the past 130 years, we have continually advanced lubricant technology to meet the evolving demands of today's modern engines and equipment. Sunoco Lubricants offers a comprehensive portfolio of products that meet the latest approvals and recommendations from leading OEMs worldwide.

For more information, go to Sunocolubes.com, or scan:

SUNOCO LUBRICANTS

420 Imperial Court, Bensalem, PA 19020 • **800-660-0761** • **sunocolubes.com**

Ordering: orders@sunocolubes.com

Technical Assistance: technical@sunocolubes.com

General Inquiries: lubricants@sunocolubes.com

The data and OEM specifications listed are to the best of our knowledge accurate. This information listed is typical data and should not be considered a product standard nor a standard upon which acceptance or rejection of delivered product is to be based. It is the owner's responsibility to consult their equipment owner's manual and select the proper lubricant and viscosity grade for given application. This data is subject to change without notification. 3/26

محرک چرخش

تأمین‌کننده تخصصی بلبرینگ و رولبرینگ

BEARINGS · SEALS · BELTS · POWER TRANSMISSION

بلبرینگ | رولبرینگ | کاسه نمد | تسمه | اورینگ | یاتاقان | پکینگ | گریس

وب‌سایت	moharekcharkhesh.com
تلفن	021 3399 8121 · 021 3399 8100
همراه	0912 464 6470
ایمیل	MoharekCharkhesh@proton.me
آدرس	تهران، خیابان امیرکبیر، کوچه ناظم‌الاطبا شمالی، پاساژ تهران، طبقه سوم، پلاک ۱۴۲
ساعت کاری	شنبه تا پنج‌شنبه، ۹:۰۰ تا ۱۸:۰۰

SCAN TO VISIT

تماس با کارشناس فروش

مشاهده محصولات در سایت

برای استعلام قیمت، اعلام موجودی و ثبت سفارش تکی و عمده گریس SUNOCO با کارشناسان محرک چرخش تماس بگیرید.

© Moharek Charkhesh — SUNOCO catalogue, distributed for reference

تمامی حقوق کاتالوگ متعلق به سازنده SUNOCO است